

SPECIFICATIONS


HZC155-01-01

ITEMS	MODEL		PVD1R5-48-1212	
			CH1	CH2
1 Nominal Output Voltage	V		+12	-12
2 Maximum Output Current	A		0.0625	0.0625
3 Maximum Output Power	W			1.5
4 Efficiency (Typ) (*1)	%			79
5 Input Voltage Range	VDC			48 (36 - 72)
6 Input Current (Typ) (*1)	A			0.04
7 Output Voltage Accuracy	(*1)	%		±3
8 Output Voltage Range	(*2)	V	+12 - +15	-12 - -15
9 Maximum Ripple & Noise	(*3)	mV	120	120
10 Maximum Line Regulation	(*4)	mV	50	50
11 Maximum Load Regulation	(*5)	mV	600	600
12 Over Current Protection	(*6)	-		Yes
13 Over Voltage Protection		-		No
14 Remote ON/OFF Control		-		No
15 Parallel Operation		-		No
16 Series Operation		-		No
17 Operating Temperature	(*7)	°C		-20 - +70
18 Operating Humidity		%RH		30 - 90 (No dewdrop)
19 Storage Temperature		°C		-30 - +85
20 Storage Humidity		%RH		10 - 95 (No dewdrop)
21 Cooling		-		Convection Cooled
22 Temperature Coefficient		%/°C		0.02
23 Withstand Voltage		-		Input - Output ... 500VAC 1min. (5mA)
24 Isolation Resistance		-		More than 100Mohm at 25°C and 70% RH Input - Output ... 500VDC
25 Vibration		-		At no operation, 10 - 55 - 10Hz (sweep for 1min.) amplitude 1.5mm constant (maximum 88.3m/s ² X, Y, Z 2h each)
26 Shock		m/s ²		196.1
27 Weight (Typ)		g		3
28 Size (W x H x D)		mm		28.5 x 18 x 8.5 (Refer to Outline Drawing)

= NOTES =


- *1 : At 48VDC input and maximum output power.
- *2 : Refer to instruction manual.
- *3 : Measured with JEITA RC-9141 probe,
Bandwidth of scope : 100MHz.
- *4 : From 36 to 72VDC input and constant load.
- *5 : From No load to Full load (balanced load)
and constant input voltage.
- *6 : Output current limiting with automatic recovery.
Avoid the operation longer than 30sec. with over load.
- *7 : Rating - Refer to derating curve on the right.
- Load (%) is percentage of
maximum output power.
- *8 : External fuse use is recommended for the operation.

Output Derating Curve

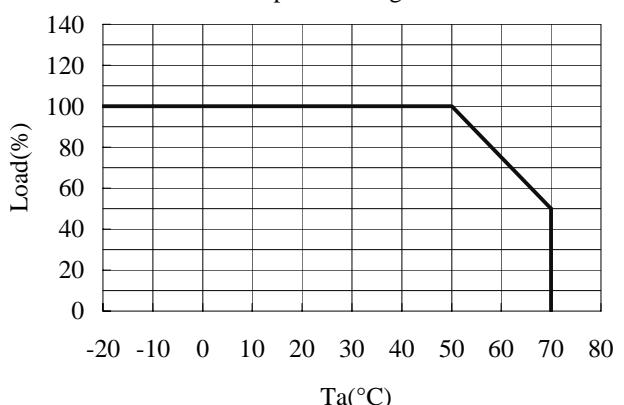

BASICAL CONNECTION

HZC155-01-02

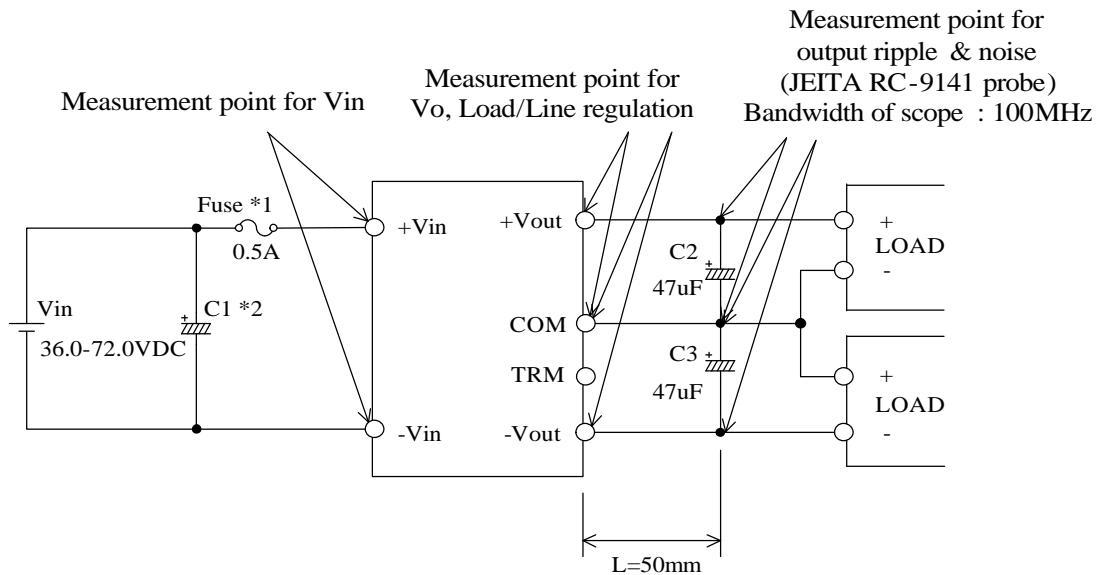Value of I^2t (typ) 0.002 (A^2s)

NOTE

*1 : External fuse use is recommended for the operation.

*2 : When the input line impedance is high, insert input capacitor C1 more than 2.2uF.
(Refer to instruction manual.)

*3 : Refer to instruction manual for furthuer details.