

ELC50

EVALUATION DATA

型式データ

INDEX

1. 測定方法	Evaluation Method	PAGE
1.1	測定回路 Circuit used for determination	
	測定回路1 Circuit 1 used for determination	T-1
	静特性 Steady state data	
	通電ドリフト特性 Warm up current drift characteristics	
	出力電流対出力電圧特性 Output current vs. Output voltage characteristics	
	過電圧保護特性 Over voltage protection (OVP) characteristics	
	測定回路2 Circuit 2 used for determination	T-1
	出力立ち上がり特性 Output rise characteristics	
	出力立ち下がり特性 Output fall characteristics	
	過渡応答(入力急変)特性 Dynamic line response characteristics	
	入力電圧瞬停特性 Response to brown out characteristics	
	出力リップル、ノイズ波形 Output ripple and noise waveform	
	測定回路3 Circuit 3 used for determination	T-2
	入力サージ電流(突入電流)波形 Inrush current waveform	
	入力電流波形 Input current waveform	
	測定回路4 Circuit 4 used for determination	T-2
	リーク電流特性 Leakage current characteristics	
	測定構成 Configuration used for determination	T-3
	EMI特性 Electro-Magnetic Interference characteristics	
	(a) 雑音端子電圧(帰還ノイズ) Conducted Emission	
	(b) 雑音電界強度(放射ノイズ) Radiated Emission	
	(c) 妨害波電力 Disturbance power	
1.2	使用測定機器 List of equipment used	T-4
1.3	評価負荷条件 Load conditions	T-4

2. 特性データ Characteristics

2.1 静特性 Steady state data

(1) 入力・負荷・温度変動／出力起動・低下電圧

Regulation - line and load, Temperature drift

/ Start up voltage and Drop out voltage T-5

(2) リップル電流対出力電圧

Ripple Current vs. Output voltage T-5

(3) 効率対出力電圧 Efficiency vs. Output voltage T-6

(4) 入力電流対出力電圧 Input current vs. Output voltage T-6

(5) 力率対出力電圧 Power factor vs. Output voltage..... T-7

2.2 通電ドリフト特性 Warm up voltage drift characteristics T-7

2.3 出力電流対出力電圧特性 Output current vs. Output voltage characteristics..... T-8

2.4 過電圧保護特性 Over voltage protection (OVP) characteristics T-8

2.5 出力立ち上がり特性 Output rise characteristics T-9

2.6 出力立ち下がり特性 Output fall characteristics T-9

2.7 過渡応答(入力急変)特性 Dynamic line response characteristics T-10

2.8 入力電圧瞬停特性 Response to brown out characteristics T-10

2.9 入力サージ電流 (突入電流) 波形 Inrush current waveform T-11

2.10 入力電流波形 Input current waveform T-12

2.11 高調波成分 Input current harmonics T-13

2.12 リーク電流特性 Leakage current characteristics T-14

2.13 出力リップル、ノイズ波形 Output ripple and noise waveform T-15

2.14 EMI特性 Electro-Magnetic Interference characteristics T-16~18

使用記号 Terminology used

		定義	Definition
Vin	入力電圧	Input voltage
Vout	出力電圧	Output voltage
Iin	入力電流	Input current
Iout	出力電流	Output current
Ta	周囲温度	Ambient temperature
f	周波数	Frequency

※ 当社標準測定条件における結果であり、参考値としてお考え願います。


Test results are reference data based on our standard measurement condition.

1. 測定方法 Evaluation Method

1.1 測定回路 Circuit used for determination


測定回路1 Circuit 1 used for determination

- ・静特性 Steady state data
- ・通電ドリフト特性 Warm up voltage drift characteristics
- ・出力電流対出力電圧特性 Output current vs. Output voltage characteristics
- ・過電圧保護特性 Over voltage protection (OVP) characteristics

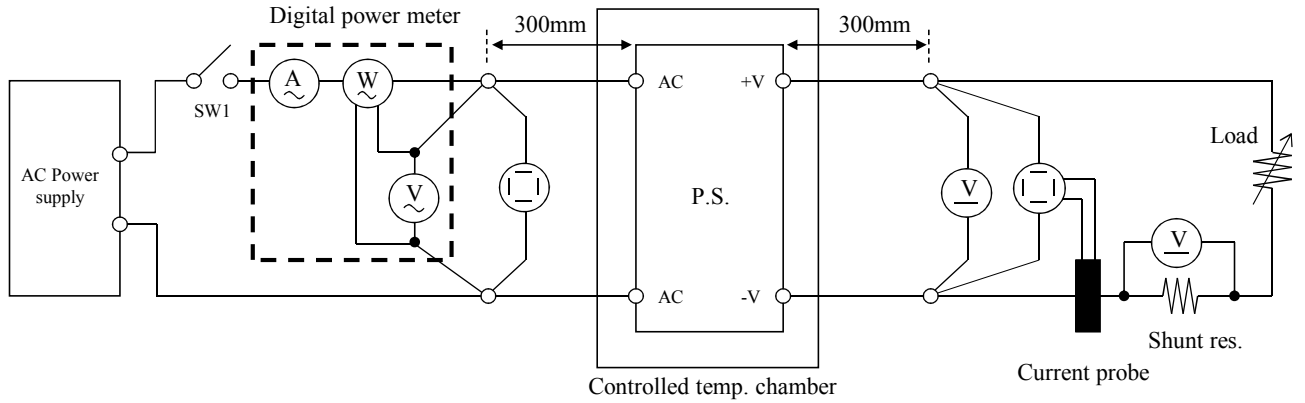


測定回路2 Circuit 2 used for determination

- ・出力立ち上がり特性 Output rise characteristics
- ・出力立ち下がり特性 Output fall characteristics
- ・過渡応答(入力急変)特性 Dynamic line response characteristics
- ・入力電圧瞬停特性 Response to brown out characteristics
- ・出力リップル、ノイズ波形 Output ripple and noise waveform

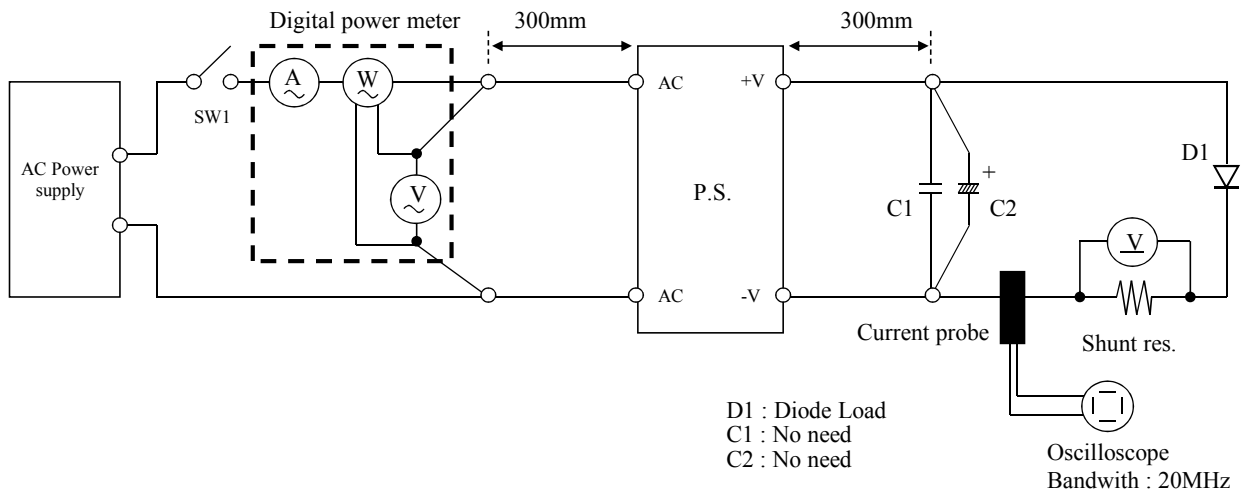


測定回路3 Circuit 3 used for determination

- ・入力サージ電流 (突入電流) 波形 Inrush current waveform
- ・入力電流波形 Input current waveform

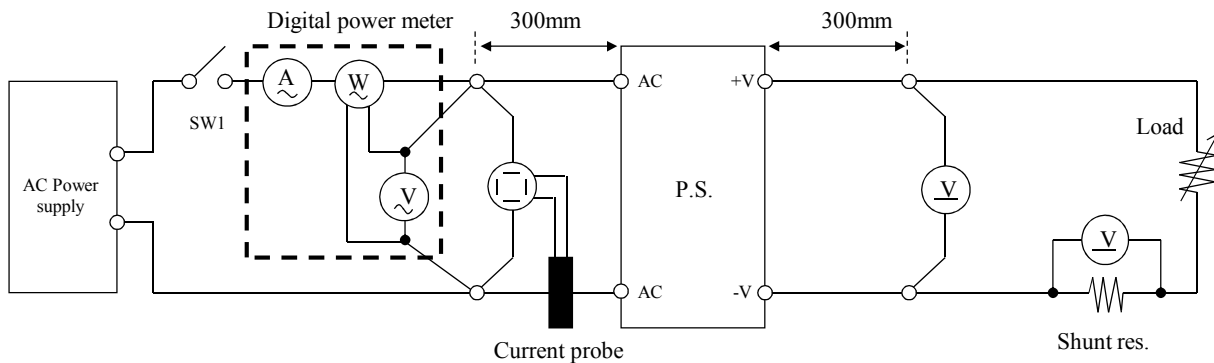

測定回路4 Circuit 4 used for determination

- ・リーク電流特性 Leakage current characteristics

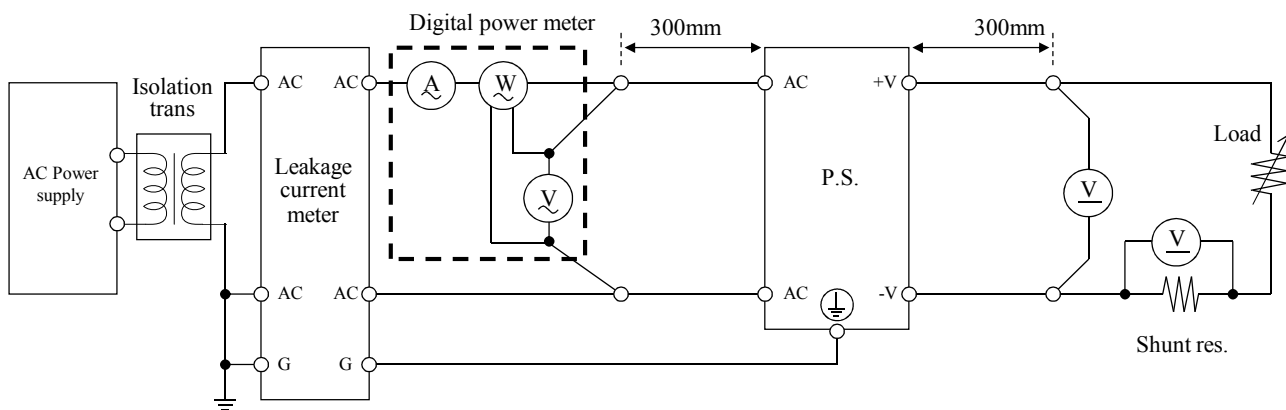


測定構成 Configuration used for determination

・EMI特性 Electro-Magnetic Interference characteristics


(a) 雑音端子電圧 (帰還ノイズ)

Conducted Emission

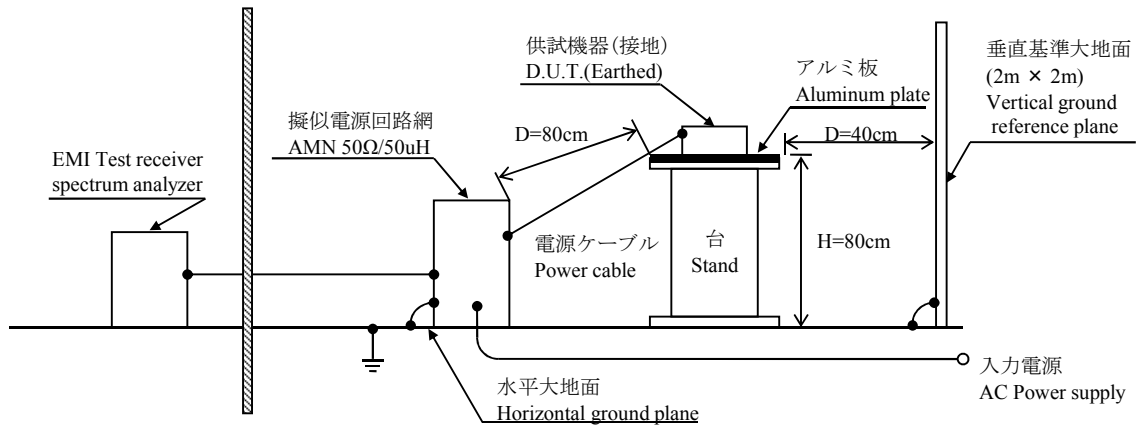


(b) 雑音電界強度 (放射ノイズ)

Radiated Emission

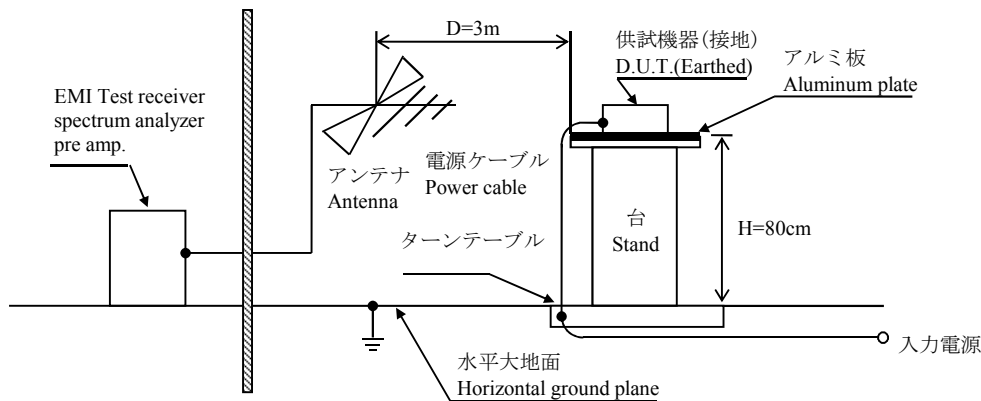

(c) 妨害波電力

Disturbance Power

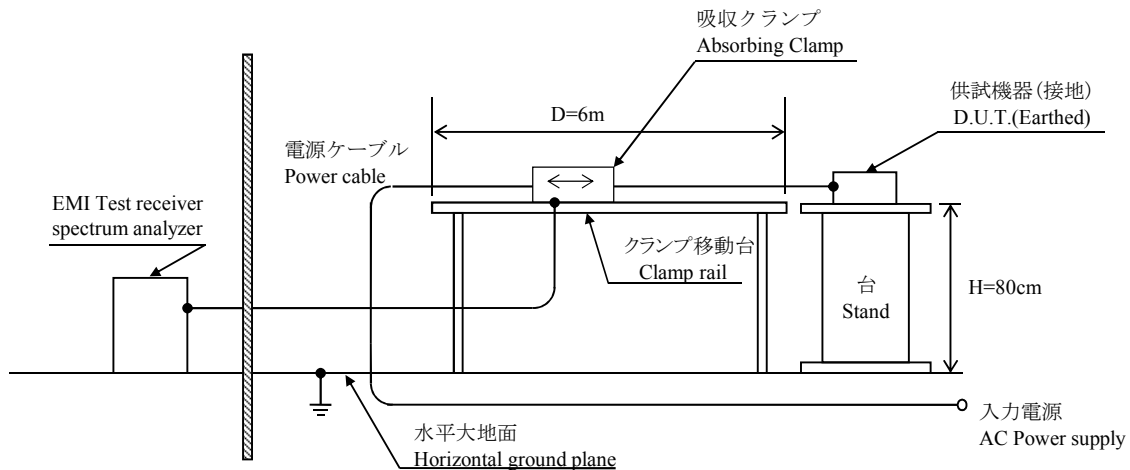

1.2 使用測定機器 List of equipment used

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	DIGITAL STORAGE OSCILLOSCOPE	YOKOGAWA ELECT.	DL9040L
2	DIGITAL MULTIMETER	AGILENT	34970A
3	DIGITAL POWER METER	HIOKI	3334
4	DIGITAL POWER METER	YOKOGAWA ELECT.	WT110/WT210
5	CURRENT PROBE	YOKOGAWA ELECT.	701928 / 701930
6	DIODE LOAD	TDK-LAMBDA	—
7	DYNAMIC DUMMY LOAD	TAKASAGO	FK-200L
8	DYNAMIC DUMMY LOAD	KIKUSUI	PLZ150U
9	ISOLATION TRANS	MATSUNAGA	3WTC-50K
10	CVCF	KIKUSUI	PCR4000L
11	CVCF	NF	ES10000S
12	LEAKAGE CURRENT METER	HIOKI	3156
13	CONTROLLED TEMP. CHAMBER	ESPEC	SU-261 / PL-4KP
14	EMI TEST RECEIVER / SPECTRUM ANALYZER	ROHDE & SCHWARZ	ESCI
15	PRE AMP.	SONOMA	310N
16	AMN	SCHWARZBECK	NNLK8121
17	ANTENNA	SCHWARZBECK	CBL6111D
18	ABSORBING CLAMP	LUTHI	MDS-21
19	HARMONIC / FLICKER ANALYZER	KIKUSUI	KHA1000
20	SINGLE-PHASE MASTER	NF	4420
21	REFERENCE IMPEDANCE NETWORK 20A	NF	4150
22	MULTI OUTLET UNIT	KIKUSUI	OT01-KHA

1.3 評価負荷条件 Load conditions

I _{out}	1.05A
V _{out} : 100%	48V
V _{out} : min	6V

2.1 静特性 Steady state data

(1) 入力・負荷・温度変動／出力起動・低下電圧

Regulation - line and load, Temperature drift / Start up voltage and Drop out voltage

1. Regulation - line and load

Condition Ta : 25 °C

Vout \ Vin	90VAC	100VAC	200VAC	305VAC	line regulation	
6V	1.043A	1.043A	1.043A	1.043A	0mA	0.000%
24V	1.041A	1.041A	1.041A	1.041A	0mA	0.000%
48V	1.039A	1.039A	1.039A	1.039A	0mA	0.000%
load regulation	4mA	4mA	4mA	4mA		
	0.571%	0.571%	0.571%	0.571%		

2. Temperature drift

Conditions Vin : 100 VAC

Vout : 100 %

Ta	-25°C	+25°C	+50°C	temperature stability	
Iout	1.041A	1.039A	1.042A	3mA	0.429%

3. Total regulation

(Total regulation of Line reg, Load reg and Temp. drift)

total regulation	
7mA	0.7%

4. Start up voltage and Drop out voltage

Conditions Ta : 25 °C

Vout : 100 %

Start up voltage (Vin)	66VAC
Drop out voltage (Vin)	51VAC

(2) リップル電流対出力電圧


Ripple Current vs. Output voltage

Conditions Vin : 100 VAC

Ta : -25 °C ---

25 °C - · - · -


50 °C —

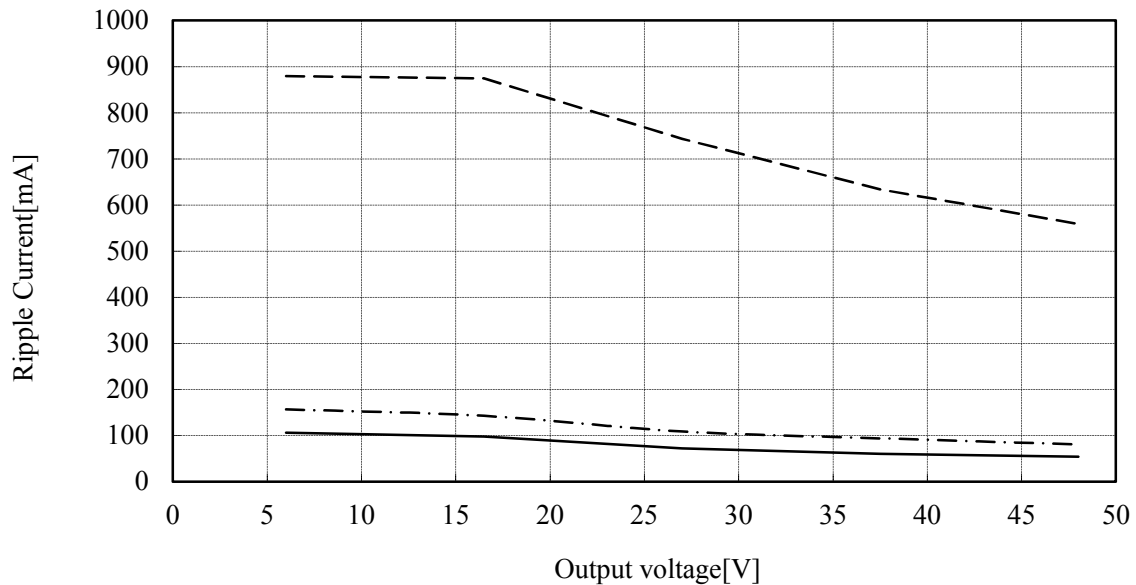

(3) 効率対出力電圧

Efficiency vs. Output voltage


Conditions Vin : 90 VAC -----
 100 VAC -.-.-.-
 200 VAC ————
 305 VAC -.-.-.-
 Ta : 25 °C

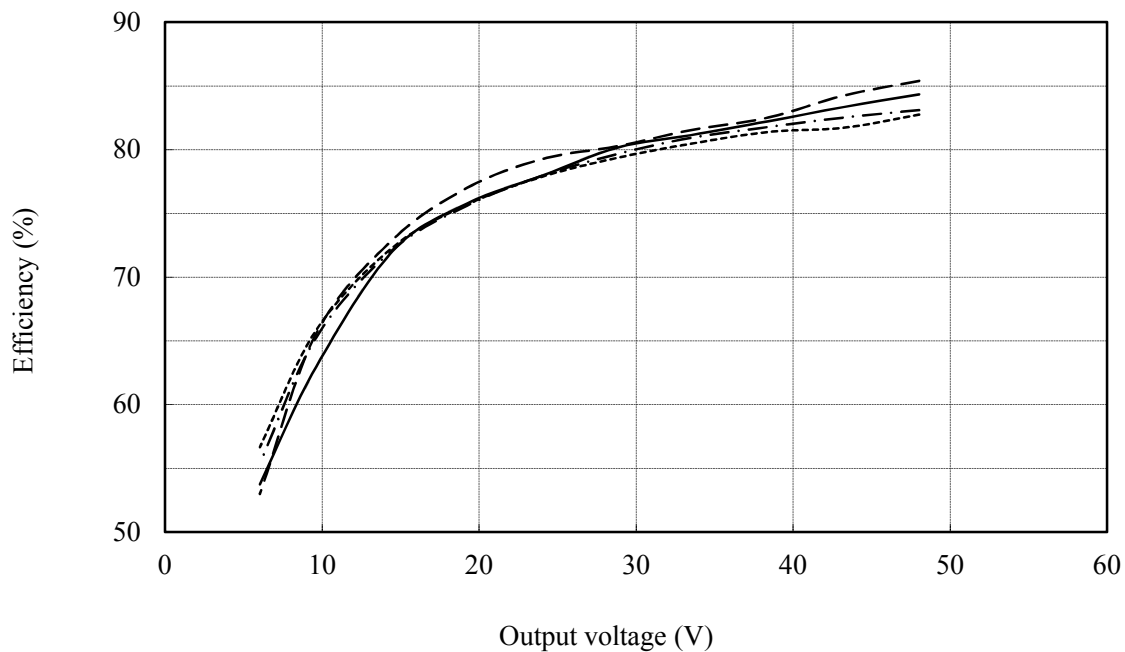

(4) 入力電流対出力電圧

Input current vs. Output voltage


Conditions Vin : 90 VAC -----
 100 VAC -.-.-.-
 200 VAC ————
 305 VAC -.-.-.-
 Ta : 25 °C

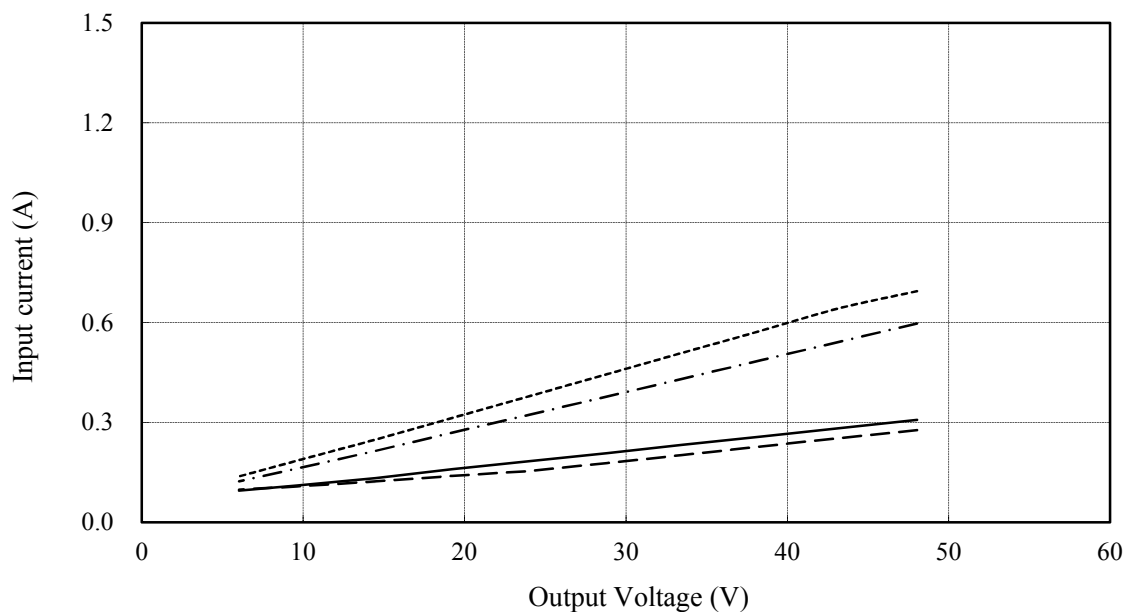

(5) 力率対出力電圧

Power factor vs. Output voltage


Conditions Vin : 90 VAC -----
 100 VAC - - - - -
 200 VAC ————
 305 VAC - - - - -
 Ta : 25 °C

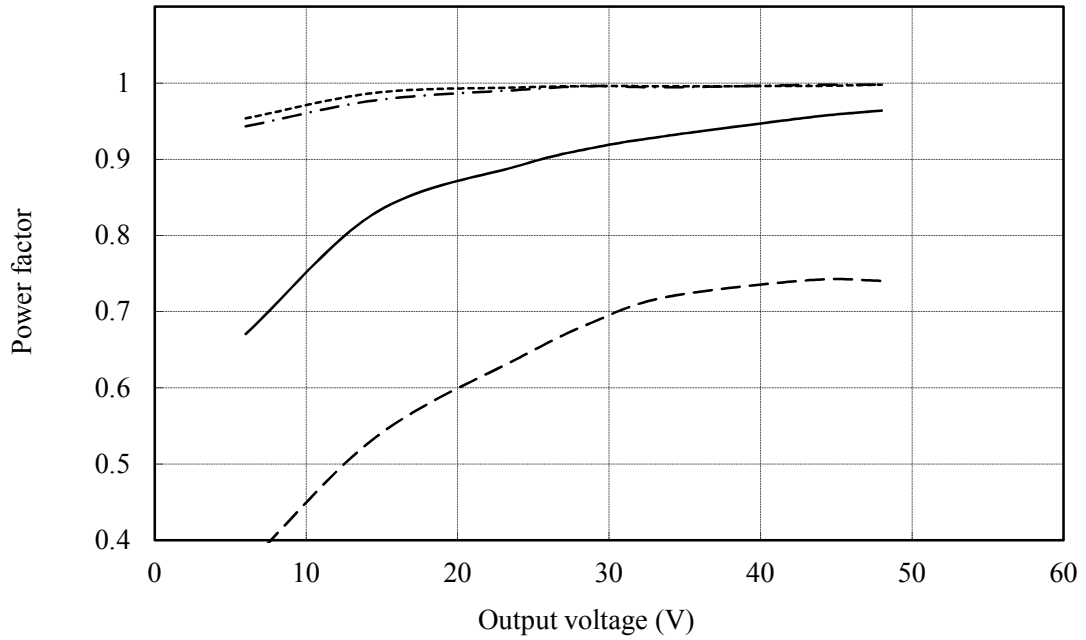

2.2 通電ドリフト特性


Warm up current drift characteristics

Conditions Vin : 100 VAC
 Vout : 100 %
 Ta : 25 °C

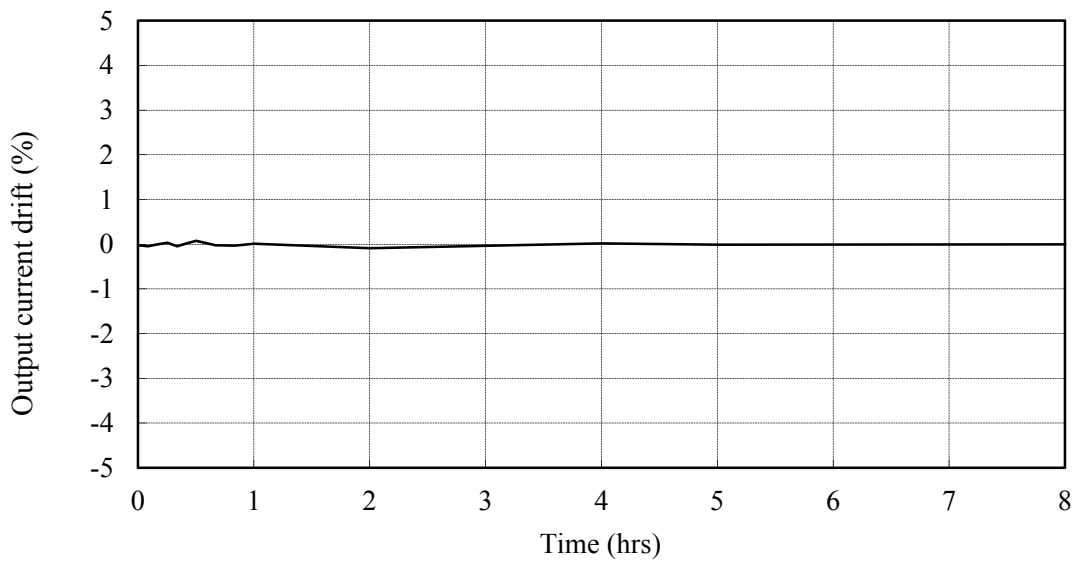


2.3 出力電流対出力電圧特性
Output current vs. Output voltage characteristics

Conditions Vin : 100 VAC
Ta : -25 °C -----
25 °C -.-.-.-
50 °C ———

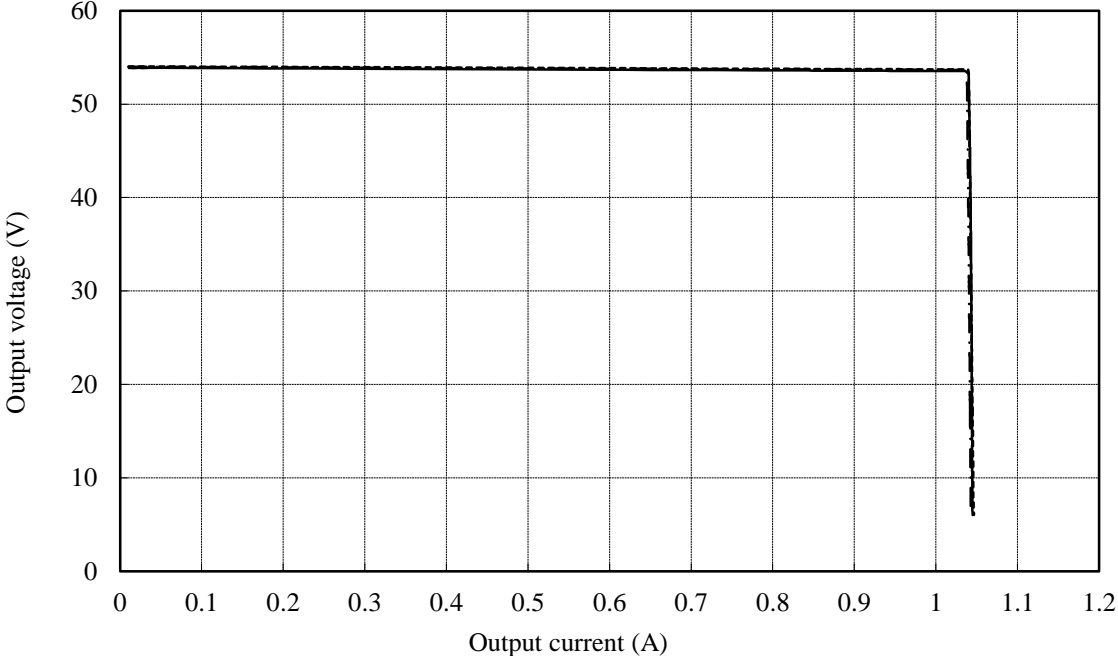


2.4 過電圧保護特性
Over voltage protection (OVP) characteristics

Conditions Vin : 100 VAC
Vout : 0 %
Ta : 25 °C

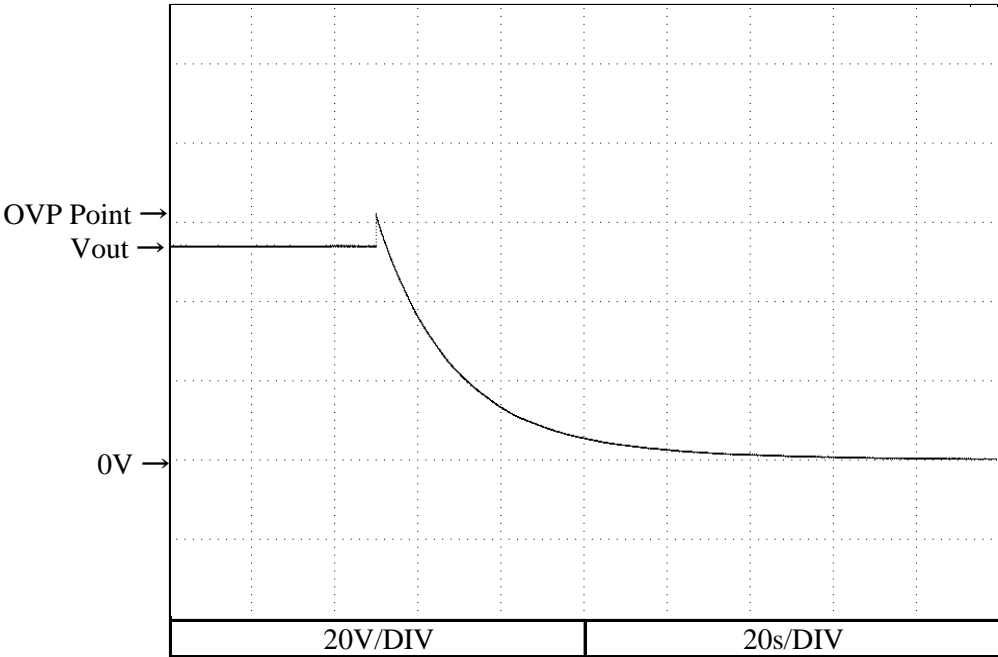


2.5 出力立ち上がり特性
Output rise characteristics

Conditions Vin : 90 VAC (A)
100 VAC (B)
200 VAC (C)
305 VAC (D)
Ta : 25 °C

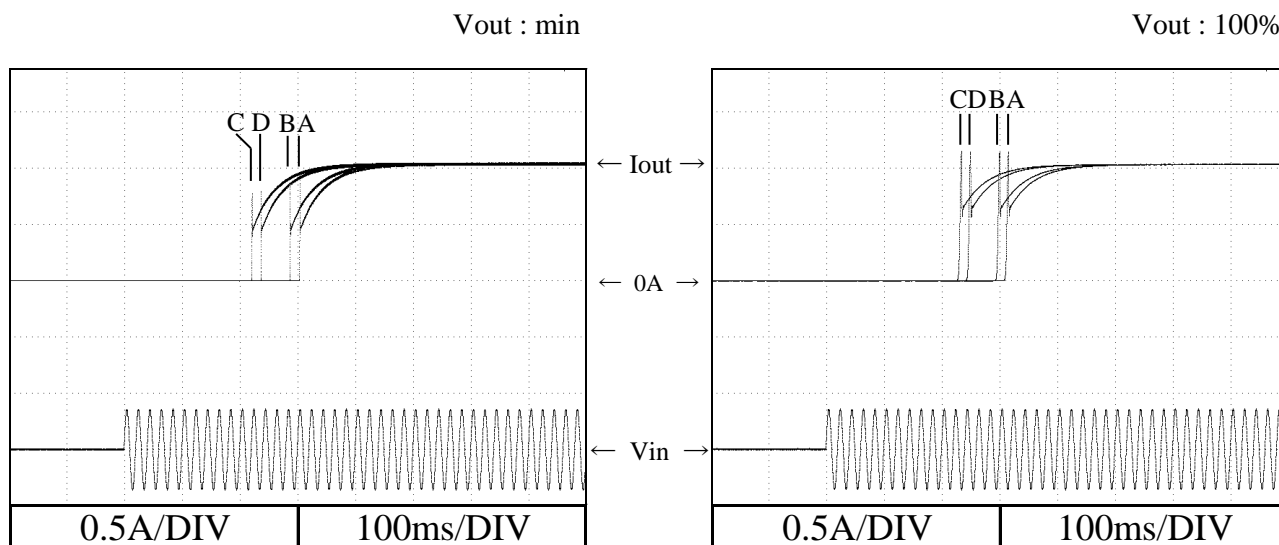

2.6 出力立ち下がり特性
Output fall characteristics


Conditions Vin : 90 VAC (A)
100 VAC (B)
200 VAC (C)
305 VAC (D)
Ta : 25 °C

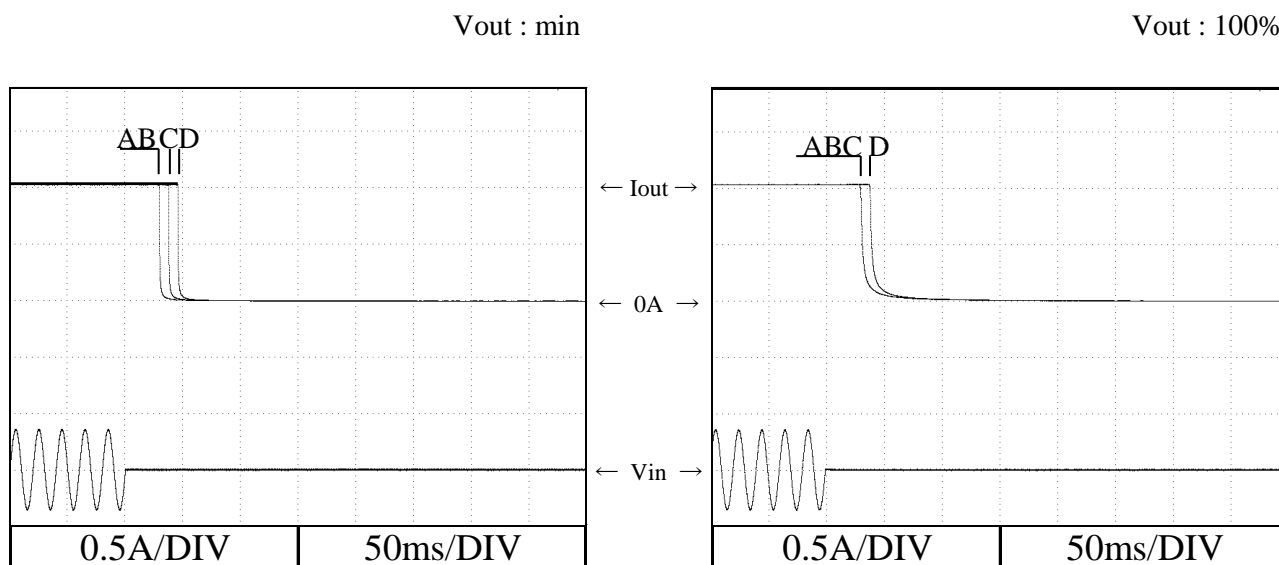

2.7 過渡応答(入力急変)特性

Dynamic line response characteristics

Conditions Vin : 90 VAC ↔ 132 VAC(A)
 170 VAC ↔ 305 VAC(B)
 Vout : 100 %
 Ta : 25 °C

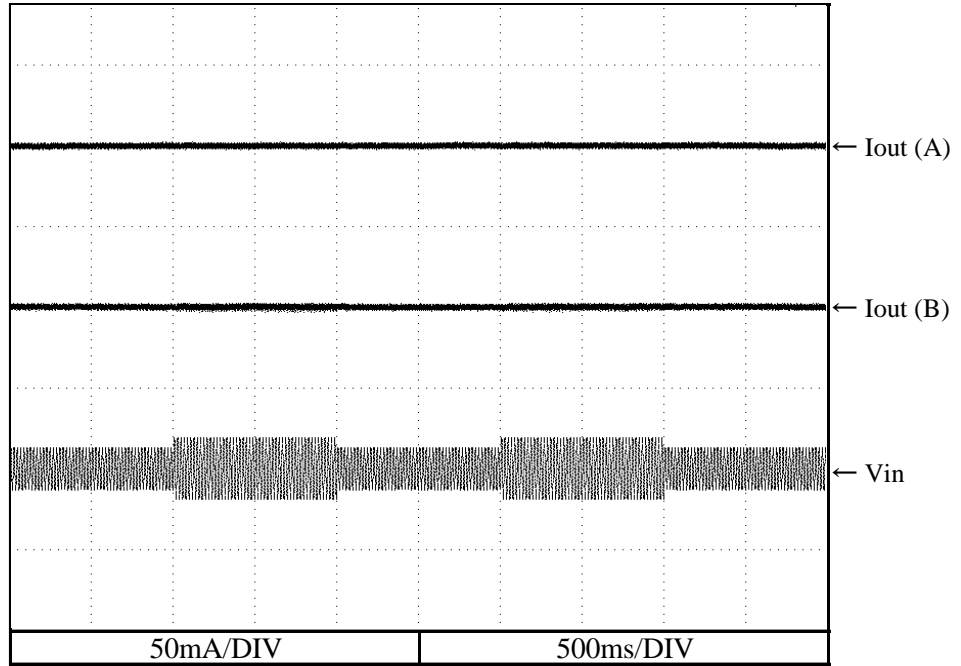

2.8 入力電圧瞬停特性

Response to brown out characteristics



Conditions Vout : 100 %
 Ta : 25 °C

Vin : 100VAC

Vin : 200VAC

A = 22ms
 B = 23ms
 C = 24ms


A = 23ms
 B = 24ms
 C = 25ms

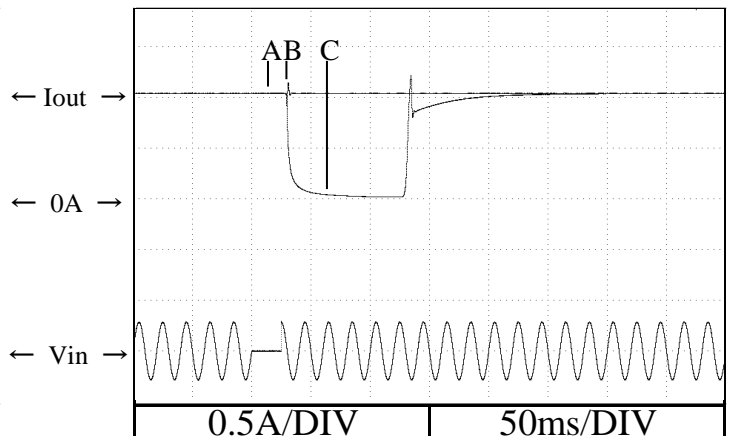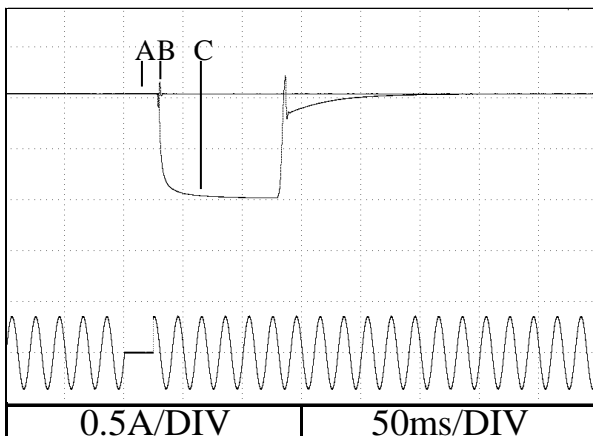


2.9 入力サージ電流（突入電流）波形
Inrush current waveform

Conditions Vin : 100 VAC
Vout : 100 %
Ta : 25 °C

Switch on phase angle of input AC voltage
 $\phi = 0^\circ$

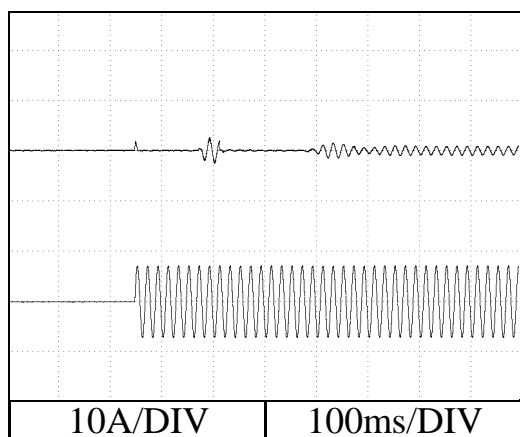


Switch on phase angle of input AC voltage
 $\phi = 90^\circ$

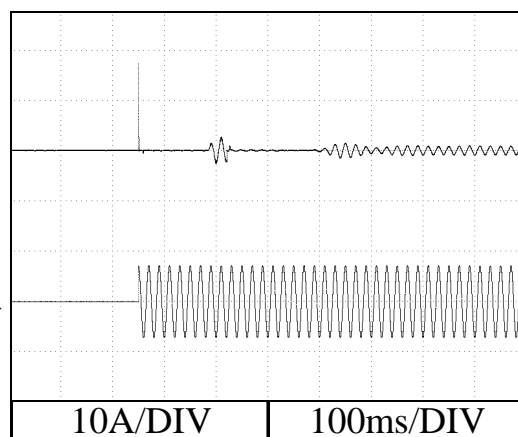


Conditions Vin : 200 VAC
Vout : 100 %
Ta : 25 °C

Switch on phase angle of input AC voltage
 $\phi = 0^\circ$

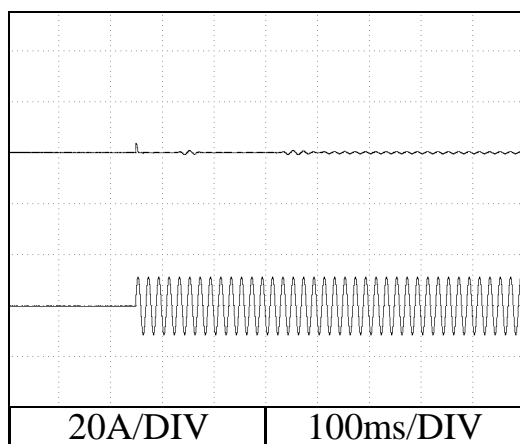

Switch on phase angle of input AC voltage
 $\phi = 90^\circ$

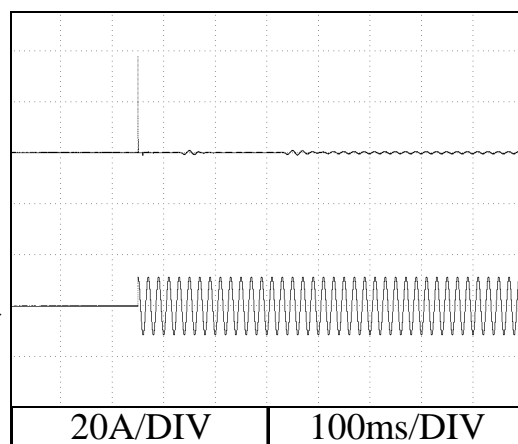


2.10 入力電流波形


Input current waveform

Conditions Vout : 100 %
Ta : 25 °C

Vin : 100 VAC

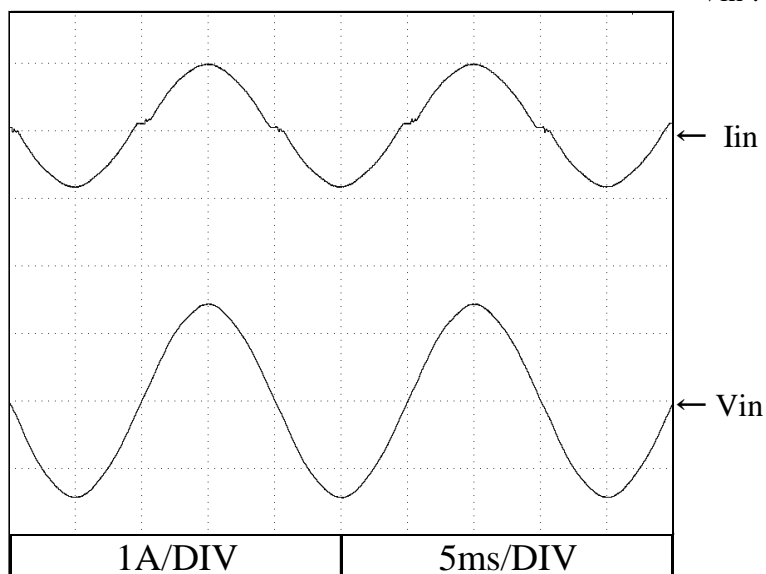

Vin : 200 VAC

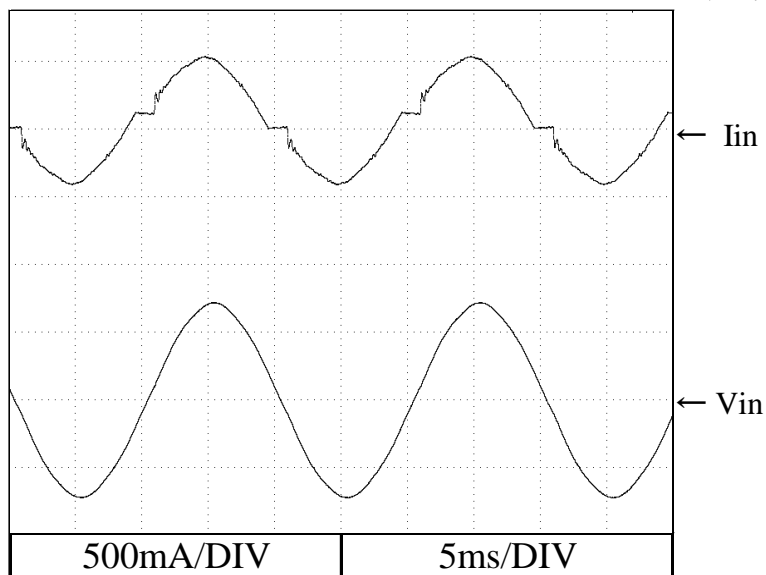



2.11 高調波成分

Input current harmonics

Conditions Vin : 100 VAC
Ta : 25 °C

Vout : 100%



Vout : 50%

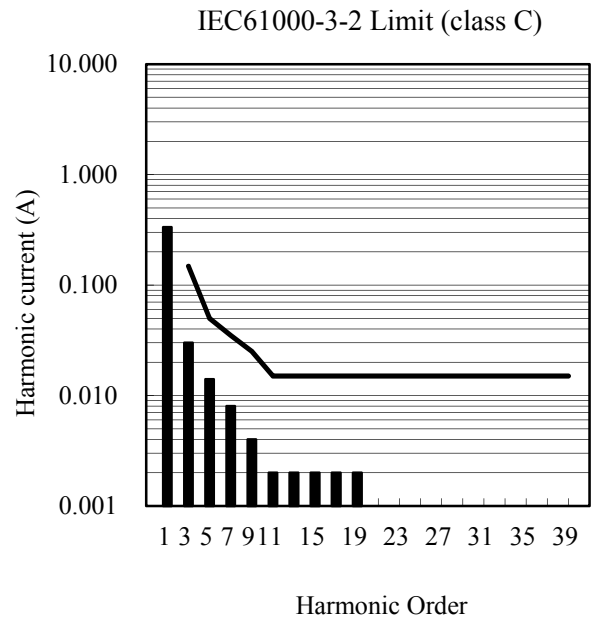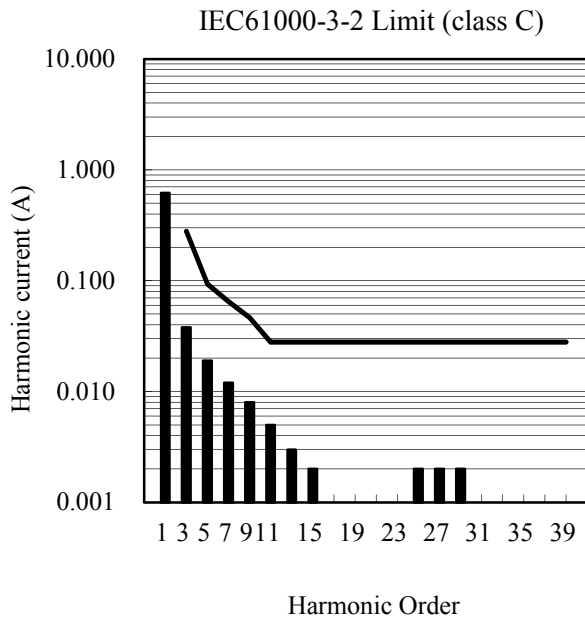

Conditions Vin : 230 VAC
Ta : 25 °C

Vout : 100%

Vout : 80%

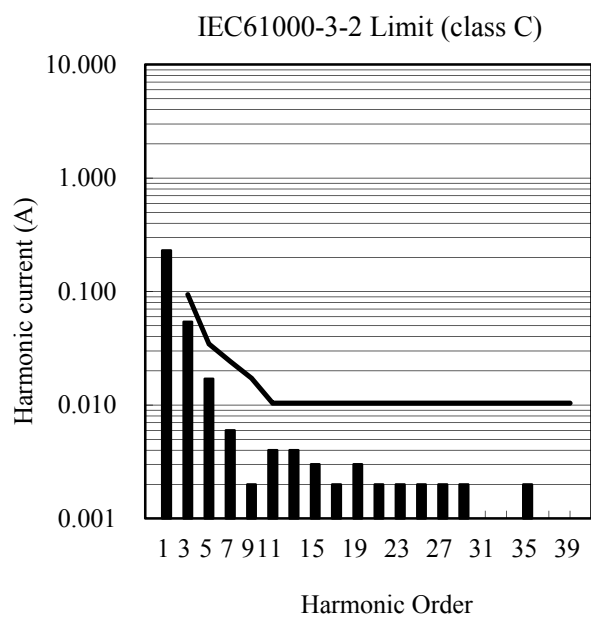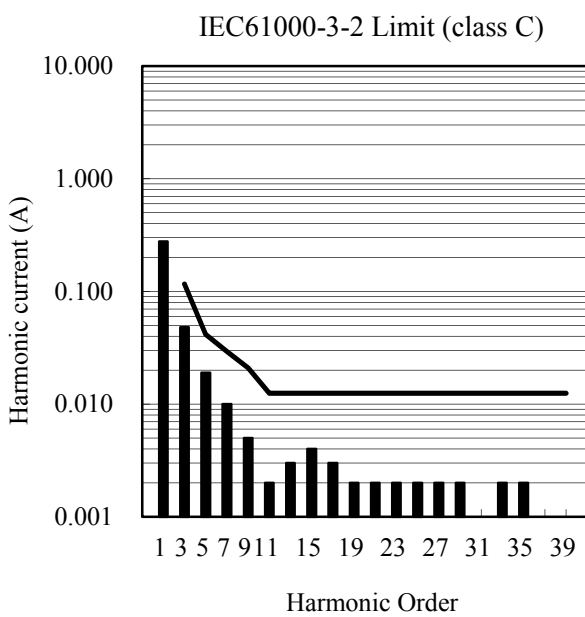


2.12 リーク電流特性
Leakage current characteristics


ELC50

Conditions Vout : min -----
100 % ————
Ta : 25 °C
Equipment used : 3156 (HIOKI)

f: 50 Hz

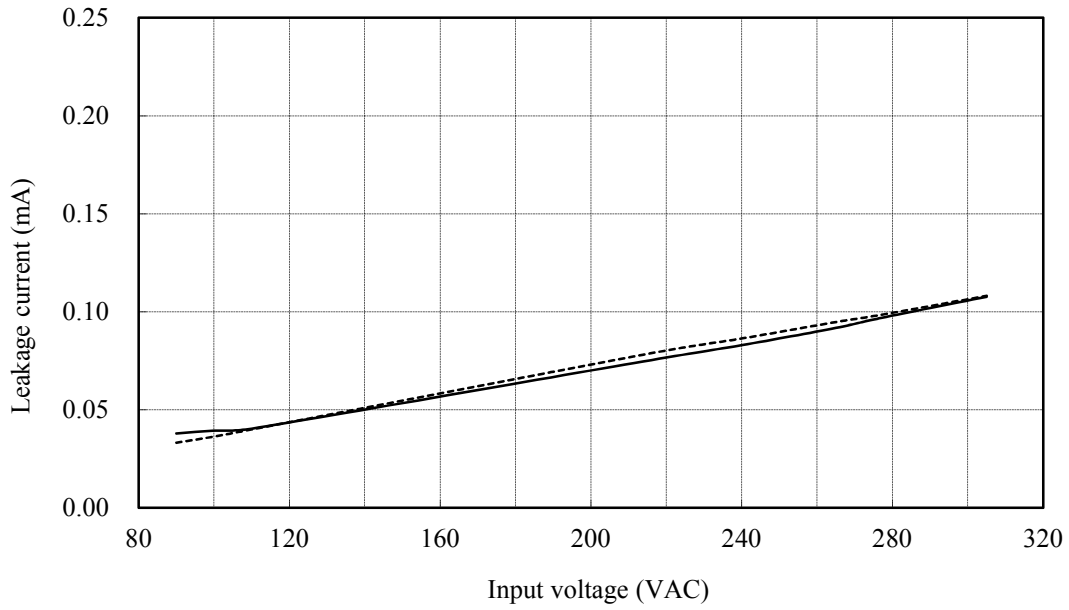


f: 60 Hz

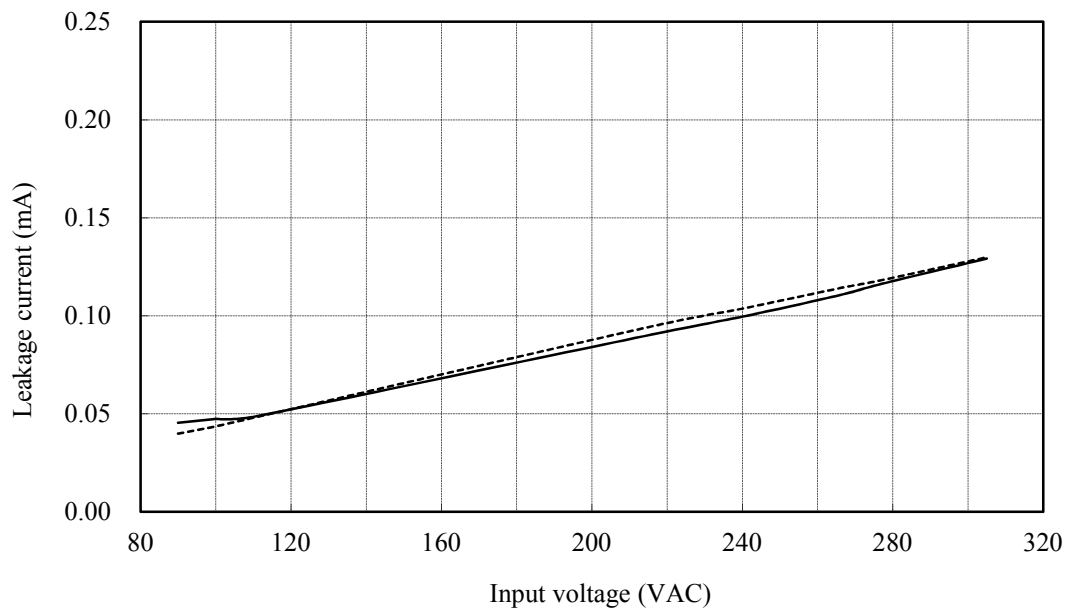


2.13 出力リップル、ノイズ波形
Output ripple and noise waveform

Conditions Vin : 100 VAC
Ta : 25 °C

Vout : 100%

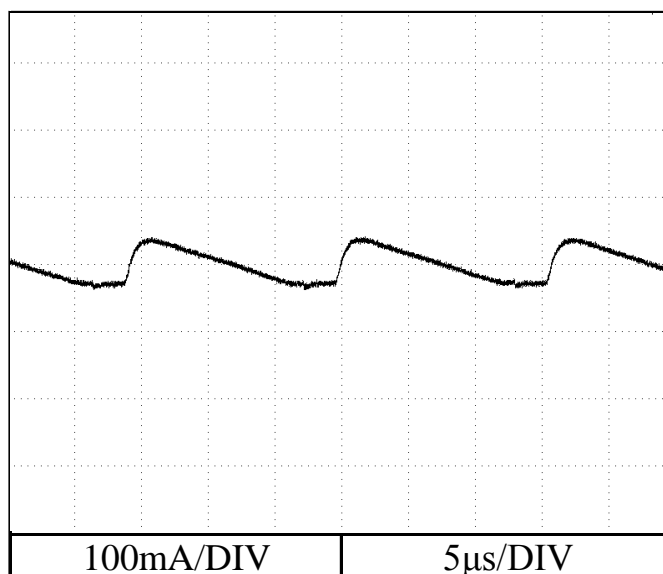

Vout : min

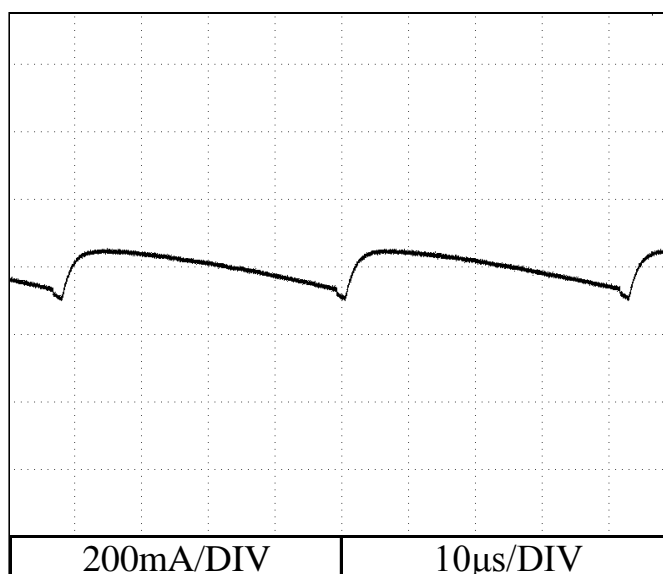

2.14 EMI特性


Electro-Magnetic Interference characteristics

Conditions Vin : 230 VAC
 Vout : 100 %
 Ta : 25 °C


雑音端子電圧

Conducted Emission

Point A (150kHz)		
Ref. Data	Limit (dB μ V)	Measure (dB μ V)
QP	66.0	56.2
AV	56.0	32.1

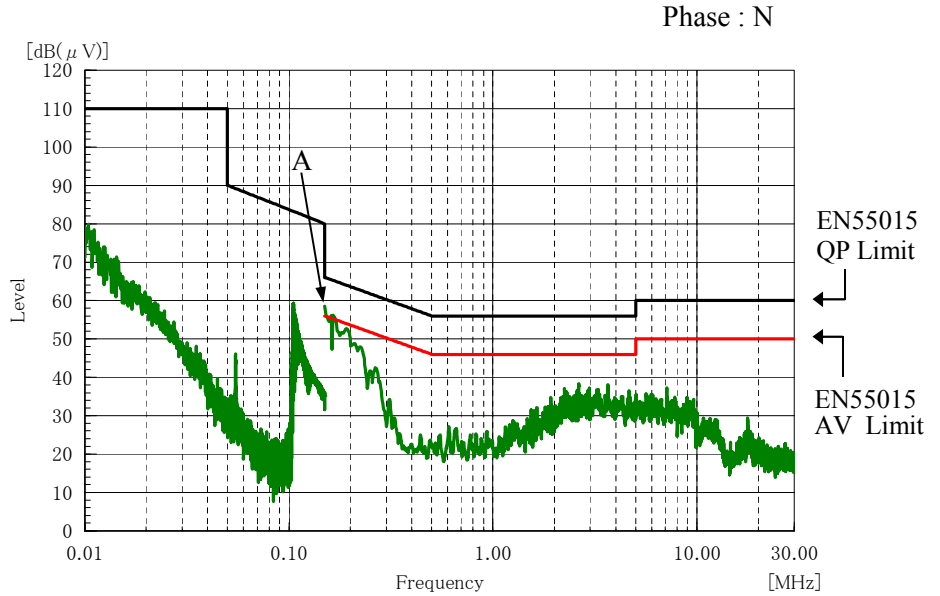

Point B (150kHz)		
Ref. Data	Limit (dB μ V)	Measure (dB μ V)
QP	66.0	56.2
AV	56.0	32.2

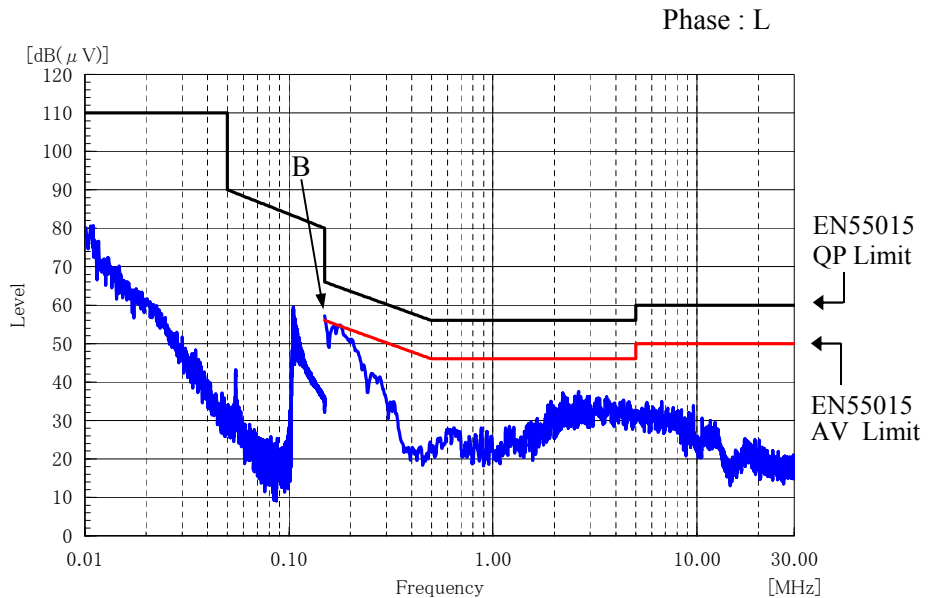

EN55022-B,VCCI-B,CISPR22-B,FCC-Bの限界値はEN55015の限界値と同じ(150kHz以上)
 Limit of EN55022-B,VCCI-B,CISPR22-B,FCC-B are same as its EN55015.(more than 150kHz)

表示はピーク値
 Indication is peak values.

2.14 EMI特性


Electro-Magnetic Interference characteristics

Conditions Vin : 230 VAC
 Vout : 100 %
 Ta : 25 °C


雑音電界強度

Radiated Emission

Point A (101MHz)		
Ref. Data	Limit (dBuV)	Measure (dBuV)
QP	40.0	29.0

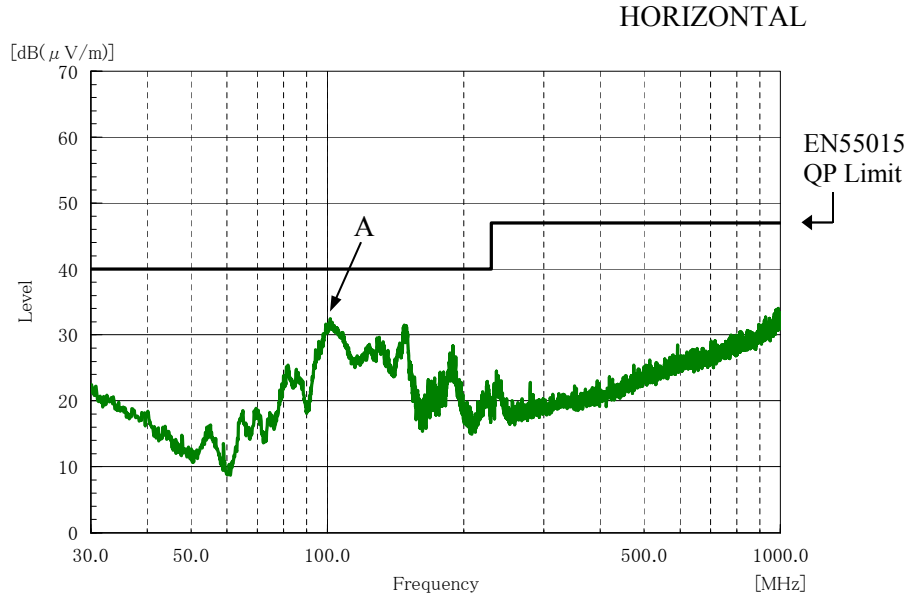

Point B (123MHz)		
Ref. Data	Limit (dBuV)	Measure (dBuV)
QP	40.0	34.2

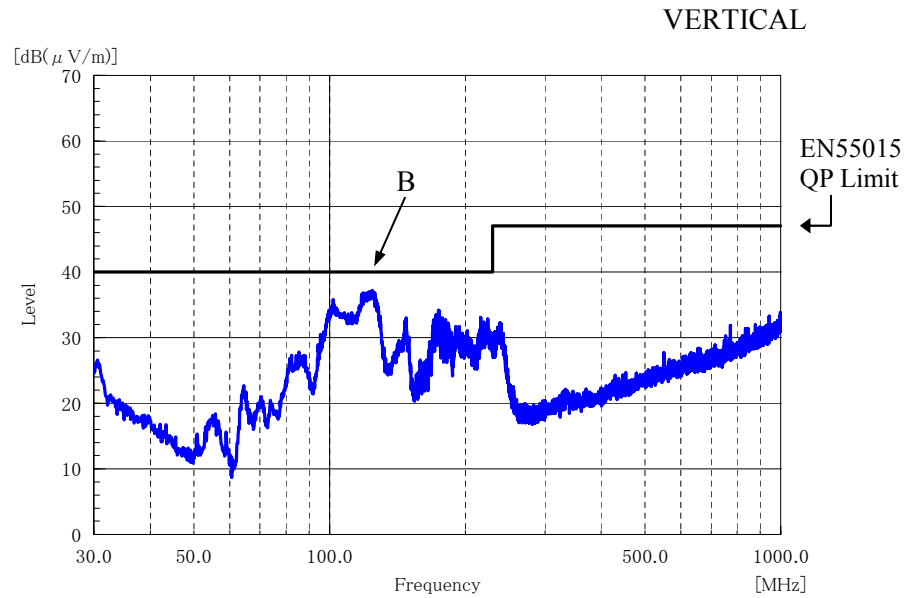

EN55022-B,VCCI-B,CISPR22-B,FCC-Bの限界値はEN55015の限界値と同じ
 Limit of EN55022-B,VCCI-B,CISPR22-B,FCC-B are same as its EN55015.

表示はピーク値
 Indication is peak values.


2.14 EMI特性

Electro-Magnetic Interference characteristics

Conditions Vin : 100 VAC
Vout : 100 %
Ta : 25 °C

妨害波電力

Disturbance Power

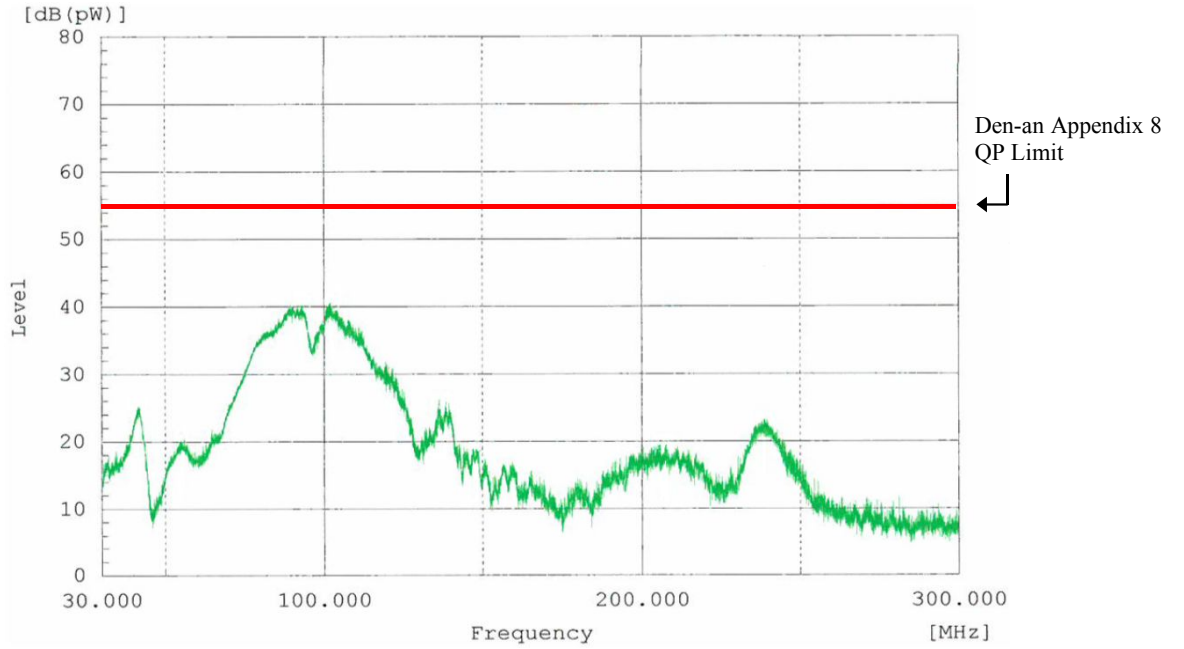

表示はピーク値
Indication is peak values.