

**CCG30-48-\*\*S**

**EVALUATION DATA**

**型式データ**

## INDEX

	PAGE
<b>1. 測定方法 Evaluation Method</b>	
1-1. 測定回路 Measurement Circuits .....	3
(1) 静特性、待機電力特性、通電ドリフト特性、その他特性 Steady state, Standby power, Warm up voltage drift and Other characteristics	
(2) 入力サージ電流(突入電流)波形 Inrush current waveform	
(3) 出力リップル、ノイズ波形 Output ripple and noise waveform	
(4) EMI特性 Electro-Magnetic Interference characteristics	
1-2. 使用測定機器 List of equipment used .....	5
<b>2. 特性データ Characteristics</b>	
2-1. 静特性 Steady state characteristics	
(1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift .....	6
(2) 出力電圧・出力リップル・ノイズ電圧 対 入力電圧 Output voltage and Output ripple and noise voltage vs. Input voltage .....	7
(3) 入力電流・効率 対 出力電流 Input current and Efficiency vs. Output current .....	9
(4) 効率 対 入力電圧 Efficiency vs. Input voltage .....	11
(5) 起動・遮断電圧特性 Start up and Drop out voltage characteristics .....	13
2-2. 待機電力特性 Standby power characteristics .....	15
2-3. 通電ドリフト特性 Warm up voltage drift characteristics .....	17
2-4. 過電流保護特性 Over current protection (OCP) characteristics .....	19
2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics .....	21
2-6. 過渡応答(負荷急変)特性 Dynamic load response characteristics .....	29
2-7. 入力サージ電流(突入電流)特性 Inrush current characteristics .....	30
2-8. 出力リップル、ノイズ波形 Output ripple and noise waveform .....	31
2-9. EMI特性 Electro-Magnetic Interference characteristics .....	32

## 使用記号 Terminology used

	定義 Definition
Vin	..... 入力電圧 Input voltage
Vo	..... 出力電圧 Output voltage
Vrc	..... RC電圧 RC voltage
Iin	..... 入力電流 Input current
Io	..... 出力電流 Output current
Ta	..... 周囲温度 Ambient temperature
f	..... 周波数 Frequency

※ 当社測定条件における結果であり、参考値としてお考え願います。

Test results are reference data based on our measurement condition.


## 1. 測定方法 Evaluation Method

### 1-1. 測定回路 Measurement Circuits


(1) 静特性、待機電力特性、通電ドリフト特性、その他特性

Steady state, Standby power, Warm up voltage drift and Other characteristics

Controlled temp. chamber

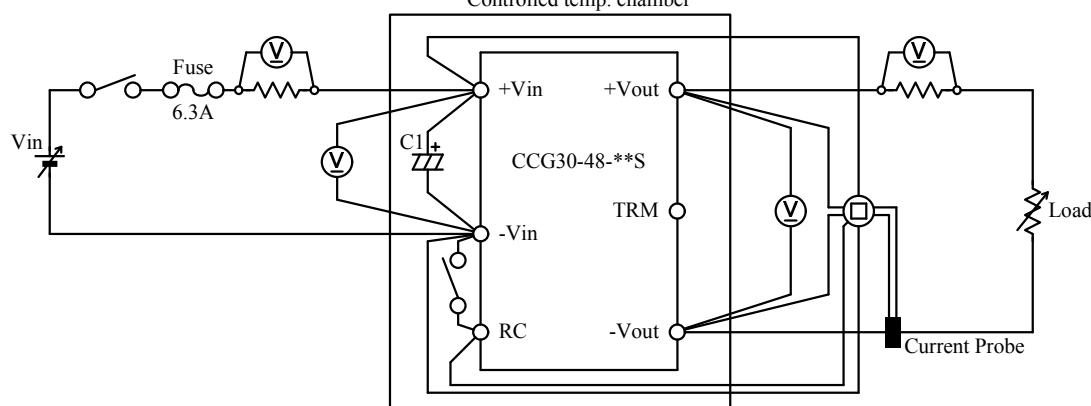


(2) 入力サージ電流(突入電流)波形 Inrush current waveform

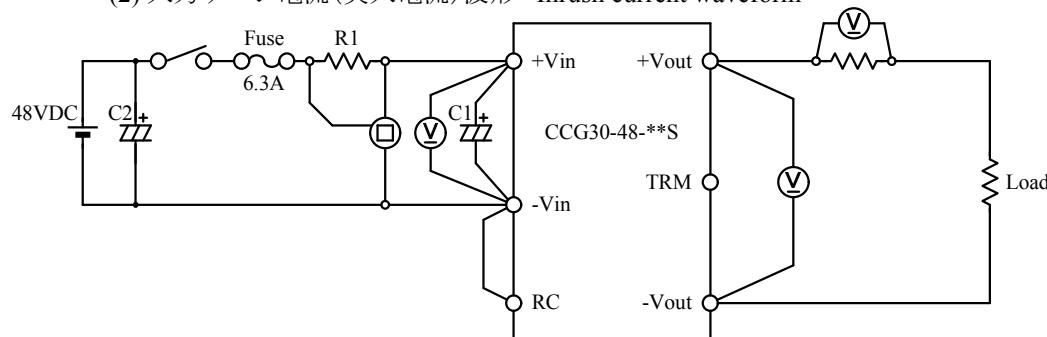

(3) 出力リップル、ノイズ電圧、波形 Output ripple and noise voltage and waveform

Controlled temp. chamber

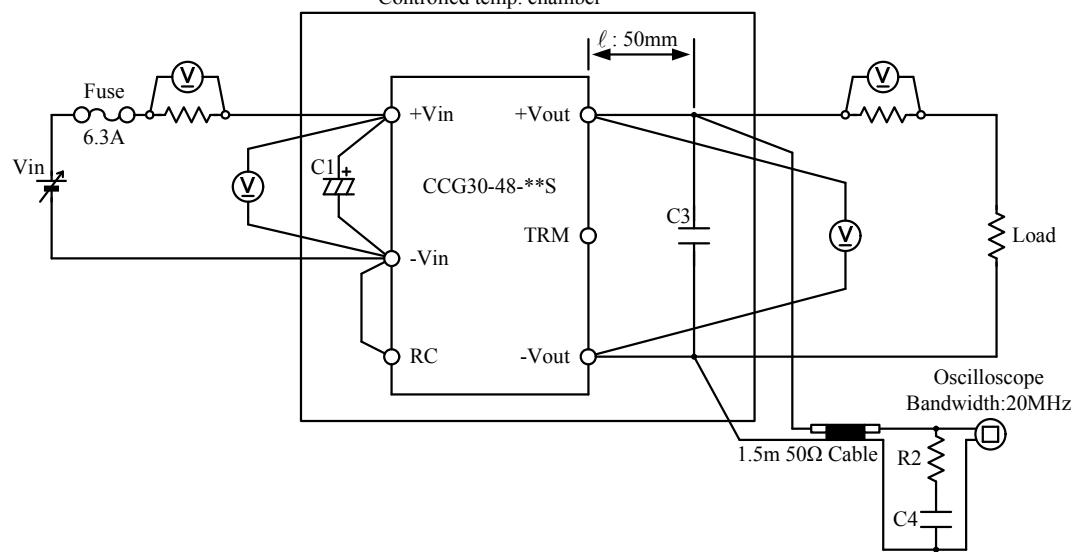

C1 : 47μF

Electrolytic Capacitor

C2 : 8000μF

Electrolytic Capacitor

C3 : 3.3V,5V - 22μF

Ceramic Capacitor

-20°C ≤ Ta ≤ 85°C

: 3.3V,5V - 22μF × 2parallel

Ceramic Capacitor

-40°C ≤ Ta < -20°C

: 12V,15V - 22μF

Ceramic Capacitor

C4 : 4700pF


Ceramic Capacitor

R1 : 0.01Ω


R2 : 50Ω

## (4) EMI特性 Electro-Magnetic Interference characteristics


## (a) 雑音端子電圧(帰還ノイズ) Conducted Emission Noise

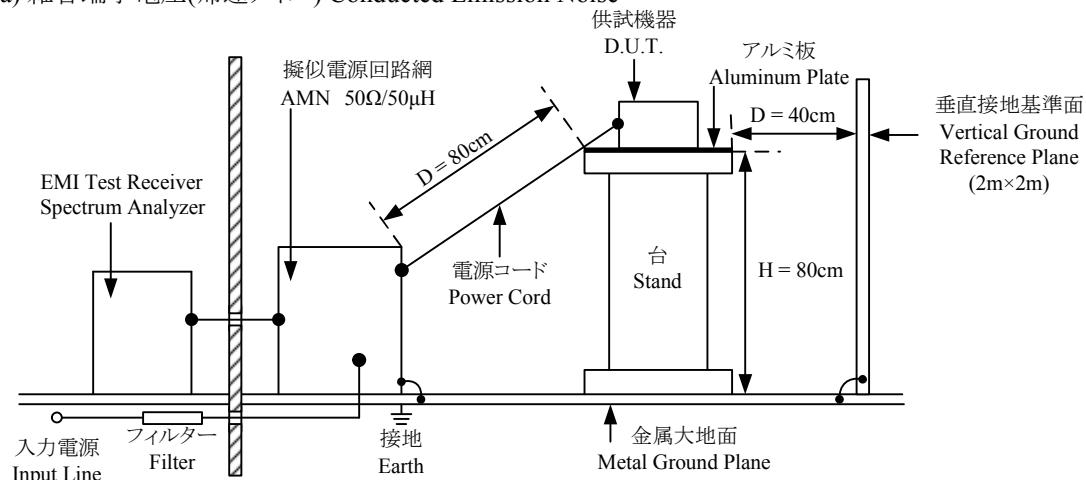

## (b) 雑音電界強度(輻射ノイズ) Radiated Emission Noise

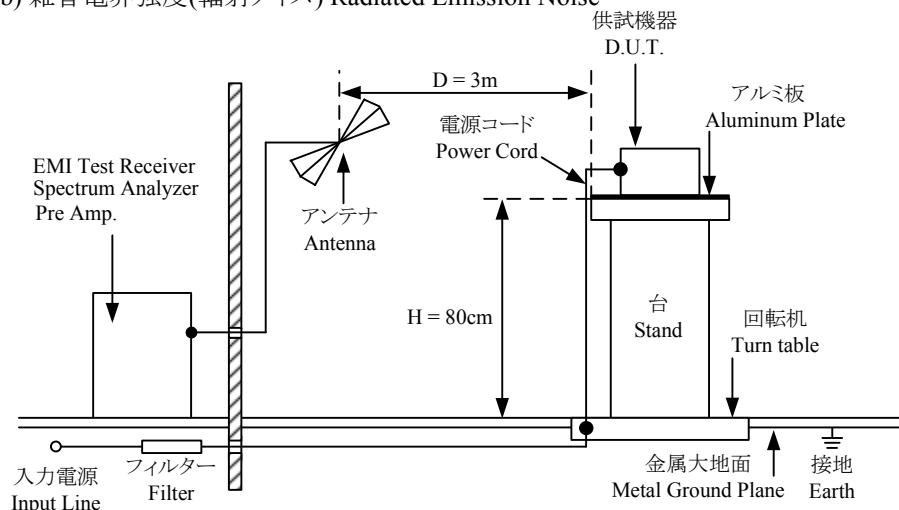

## VCCI class A 対応アプリケーション VCCI class A application system

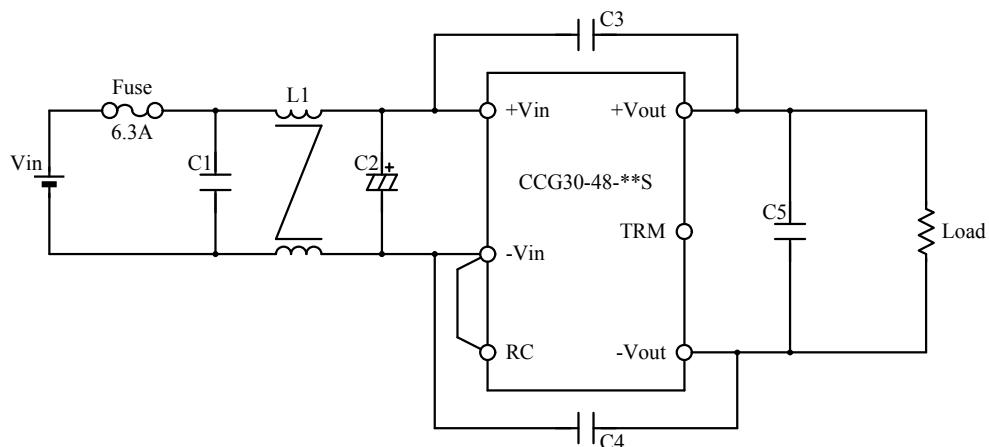 $C_1 : 4.7\mu\text{F}$ 

Ceramic Capacitor

 $C_2 : 47\mu\text{F}$ 

Electrolytic Capacitor

 $C_3 : 1000\text{pF} \times 2\text{parallel}$ 

Ceramic Capacitor

 $C_4 : 1000\text{pF} \times 2\text{parallel}$ 

Ceramic Capacitor

 $C_5 : 22\mu\text{F}$ 

Ceramic Capacitor

 $L_1 : \text{ACM1211-102-2PL (TDK)}$ 

Common Mode Choke Coil

## 1-2. 使用測定機器 List of equipment used

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	DIGITAL STORAGE OSCILLOSCOPE	YOKOGAWA ELECT.	DL1740 / DL1740E
2	DIGITAL MULTIMETER	AGILENT	34970A
3	CURRENT PROBE	YOKOGAWA ELECT.	701932
4	CURRENT PROBE	AGILENT	N2774A
5	SHUNT RESISTER	YOKOGAWA ELECT.	2215
6	DYNAMIC DUMMY LOAD	TAKASAGO	FK-200L / FK-600L
7	CVCF	TAKASAGO	AA2000XG
8	CVCF	NF	ES1000S / ES10000S
9	DC POWER SUPPLY	TDK-Lambda	Z+100-8
10	CONTROLLED TEMP. CHAMBER	ESPEC	SU-261 / SU-641
11	EMI TEST RECEIVER / SPECTRUM ANALYZER	ROHDE & SCHWARZ	ESCI
12	PRE AMP.	SONOMA	310N
13	AMN	KIKUSUI	KNW-242C
14	ANTENNA	SCHWARZBECK	BBA9106/VHA9103
15	ANTENNA	SCHWARZBECK	UHALP9107

## 2. 特性データ Characteristics

### 2-1. 静特性 Steady state characteristics

(1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift

<b>3.3V</b>	1. Regulation - line and load	Condition	Ta : 25 °C
-------------	-------------------------------	-----------	------------

Io \ Vin	18VDC	24VDC	48VDC	76VDC	Line regulation	
0%	3.303V	3.303V	3.303V	3.303V	0mV	0.000%
50%	3.299V	3.299V	3.299V	3.298V	1mV	0.030%
100%	3.295V	3.295V	3.295V	3.294V	1mV	0.030%
Load regulation	8mV	8mV	8mV	9mV		
	0.242%	0.242%	0.242%	0.273%		

2. Temperature drift	Conditions	Vin : 48 VDC
		Io : 100 %

Ta	-40°C	25°C	85°C	Temperature stability
Vo	3.279V	3.295V	3.289V	16mV
	0.485%			

<b>5V</b>	1. Regulation - line and load	Condition	Ta : 25 °C
-----------	-------------------------------	-----------	------------

Io \ Vin	18VDC	24VDC	48VDC	76VDC	Line regulation	
0%	5.012V	5.013V	5.013V	5.012V	1mV	0.020%
50%	5.009V	5.010V	5.009V	5.009V	1mV	0.020%
100%	5.006V	5.007V	5.006V	5.005V	2mV	0.040%
Load regulation	6mV	6mV	7mV	7mV		
	0.120%	0.120%	0.140%	0.140%		

2. Temperature drift	Conditions	Vin : 48 VDC
		Io : 100 %

Ta	-40°C	25°C	85°C	Temperature stability
Vo	4.975V	5.006V	5.006V	31mV
	0.620%			

<b>12V</b>	1. Regulation - line and load	Condition	Ta : 25 °C
------------	-------------------------------	-----------	------------

Io \ Vin	18VDC	24VDC	48VDC	76VDC	Line regulation	
0%	12.111V	12.112V	12.112V	12.111V	1mV	0.008%
50%	12.109V	12.110V	12.109V	12.106V	4mV	0.033%
100%	12.108V	12.109V	12.108V	12.107V	2mV	0.017%
Load regulation	3mV	3mV	4mV	5mV		
	0.025%	0.025%	0.033%	0.042%		

2. Temperature drift	Conditions	Vin : 48 VDC
		Io : 100 %

Ta	-40°C	25°C	85°C	Temperature stability
Vo	12.069V	12.108V	12.115V	46mV
	0.383%			

<b>15V</b>	1. Regulation - line and load	Condition	Ta : 25 °C
------------	-------------------------------	-----------	------------

Io \ Vin	18VDC	24VDC	48VDC	76VDC	Line regulation	
0%	15.116V	15.117V	15.118V	15.117V	2mV	0.013%
50%	15.114V	15.115V	15.115V	15.112V	3mV	0.020%
100%	15.113V	15.115V	15.114V	15.113V	2mV	0.013%
Load regulation	3mV	2mV	4mV	5mV		
	0.020%	0.013%	0.027%	0.033%		


2. Temperature drift	Conditions	Vin : 48 VDC
		Io : 100 %

Ta	-40°C	25°C	85°C	Temperature stability
Vo	15.103V	15.114V	15.127V	24mV
	0.160%			

## (2) 出力電圧・出力リップルノイズ電圧 対 入力電圧

Output voltage and Output ripple and noise voltage vs. Input voltage



Conditions   Io : 100 %  
 Ta : -40 °C   -----  
 : 25 °C   - - -  
 : 85 °C   - - - -

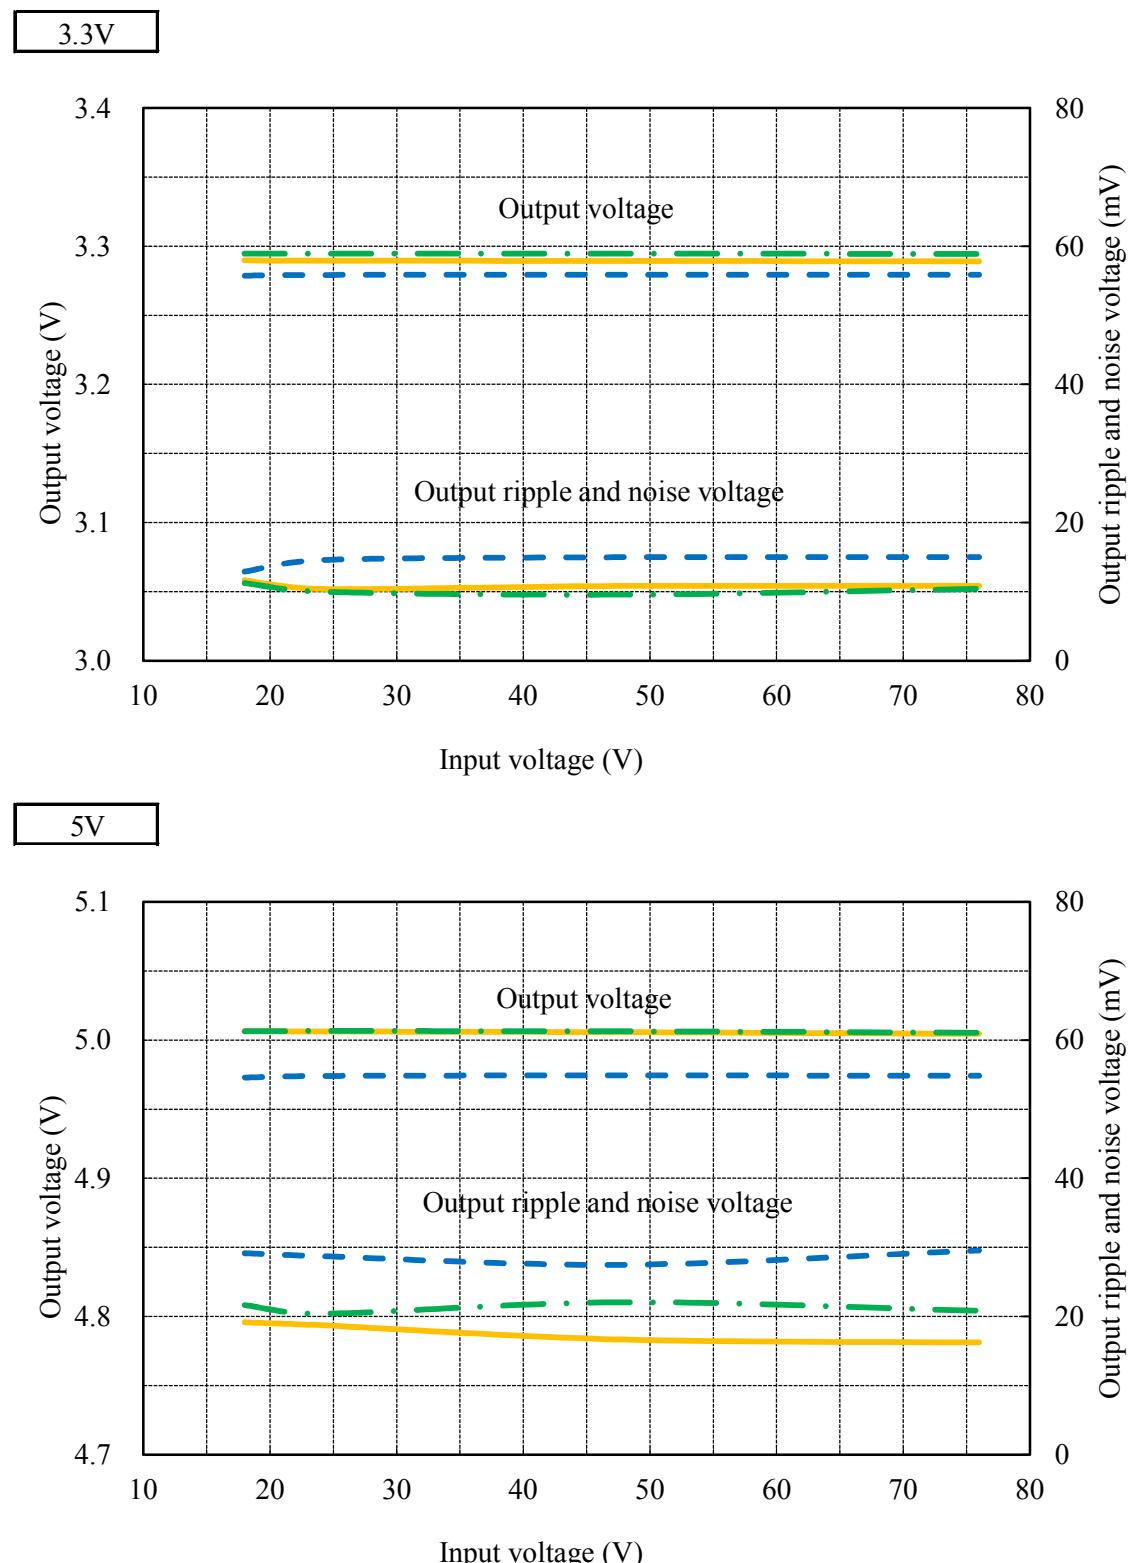


## (2) 出力電圧・出力リップルノイズ電圧 対 入力電圧

Output voltage and Output ripple and noise voltage vs. Input voltage


Conditions   Io : 100 %  
 Ta : -40 °C   -----  
 : 25 °C   - - -  
 : 85 °C   - - - -

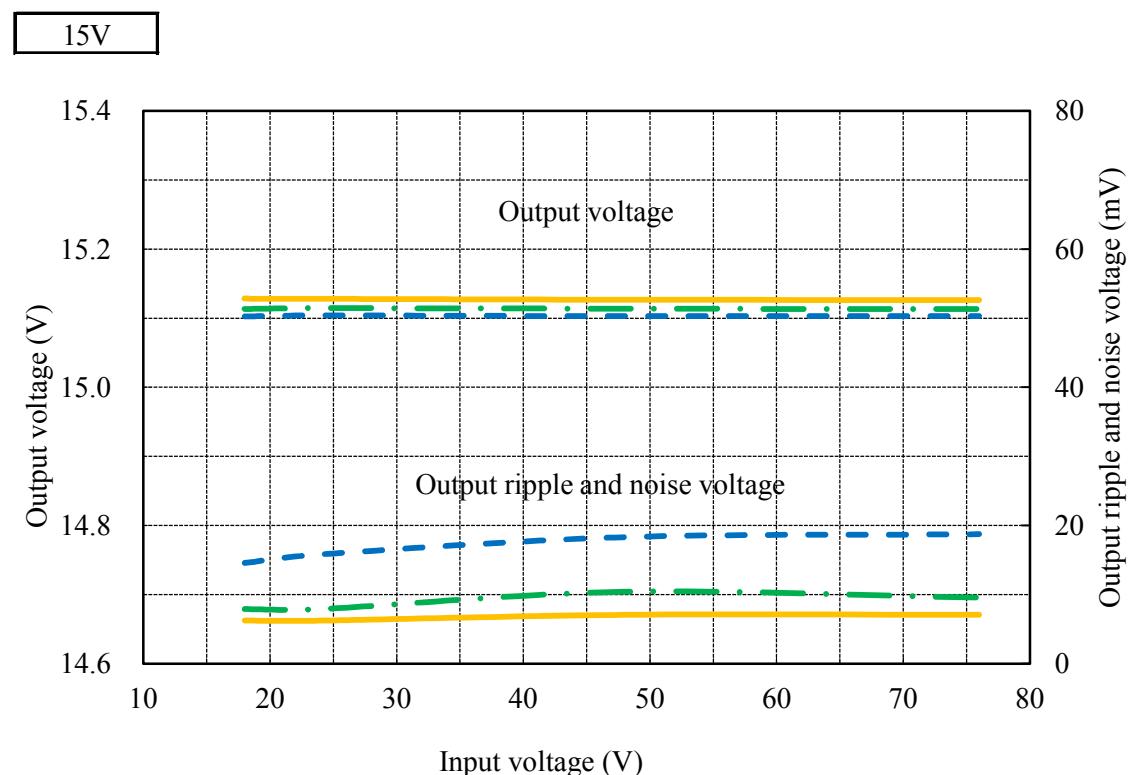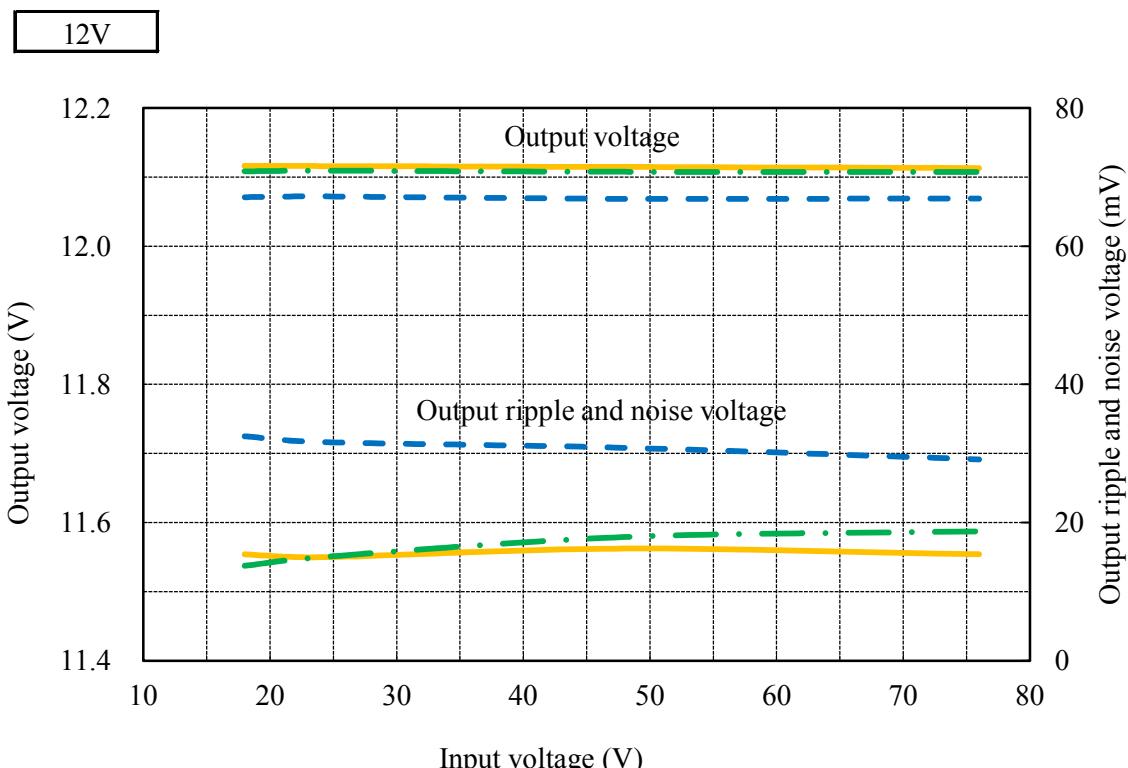


### (3) 入力電流・効率 対 出力電流 Input current and Efficiency vs. Output current

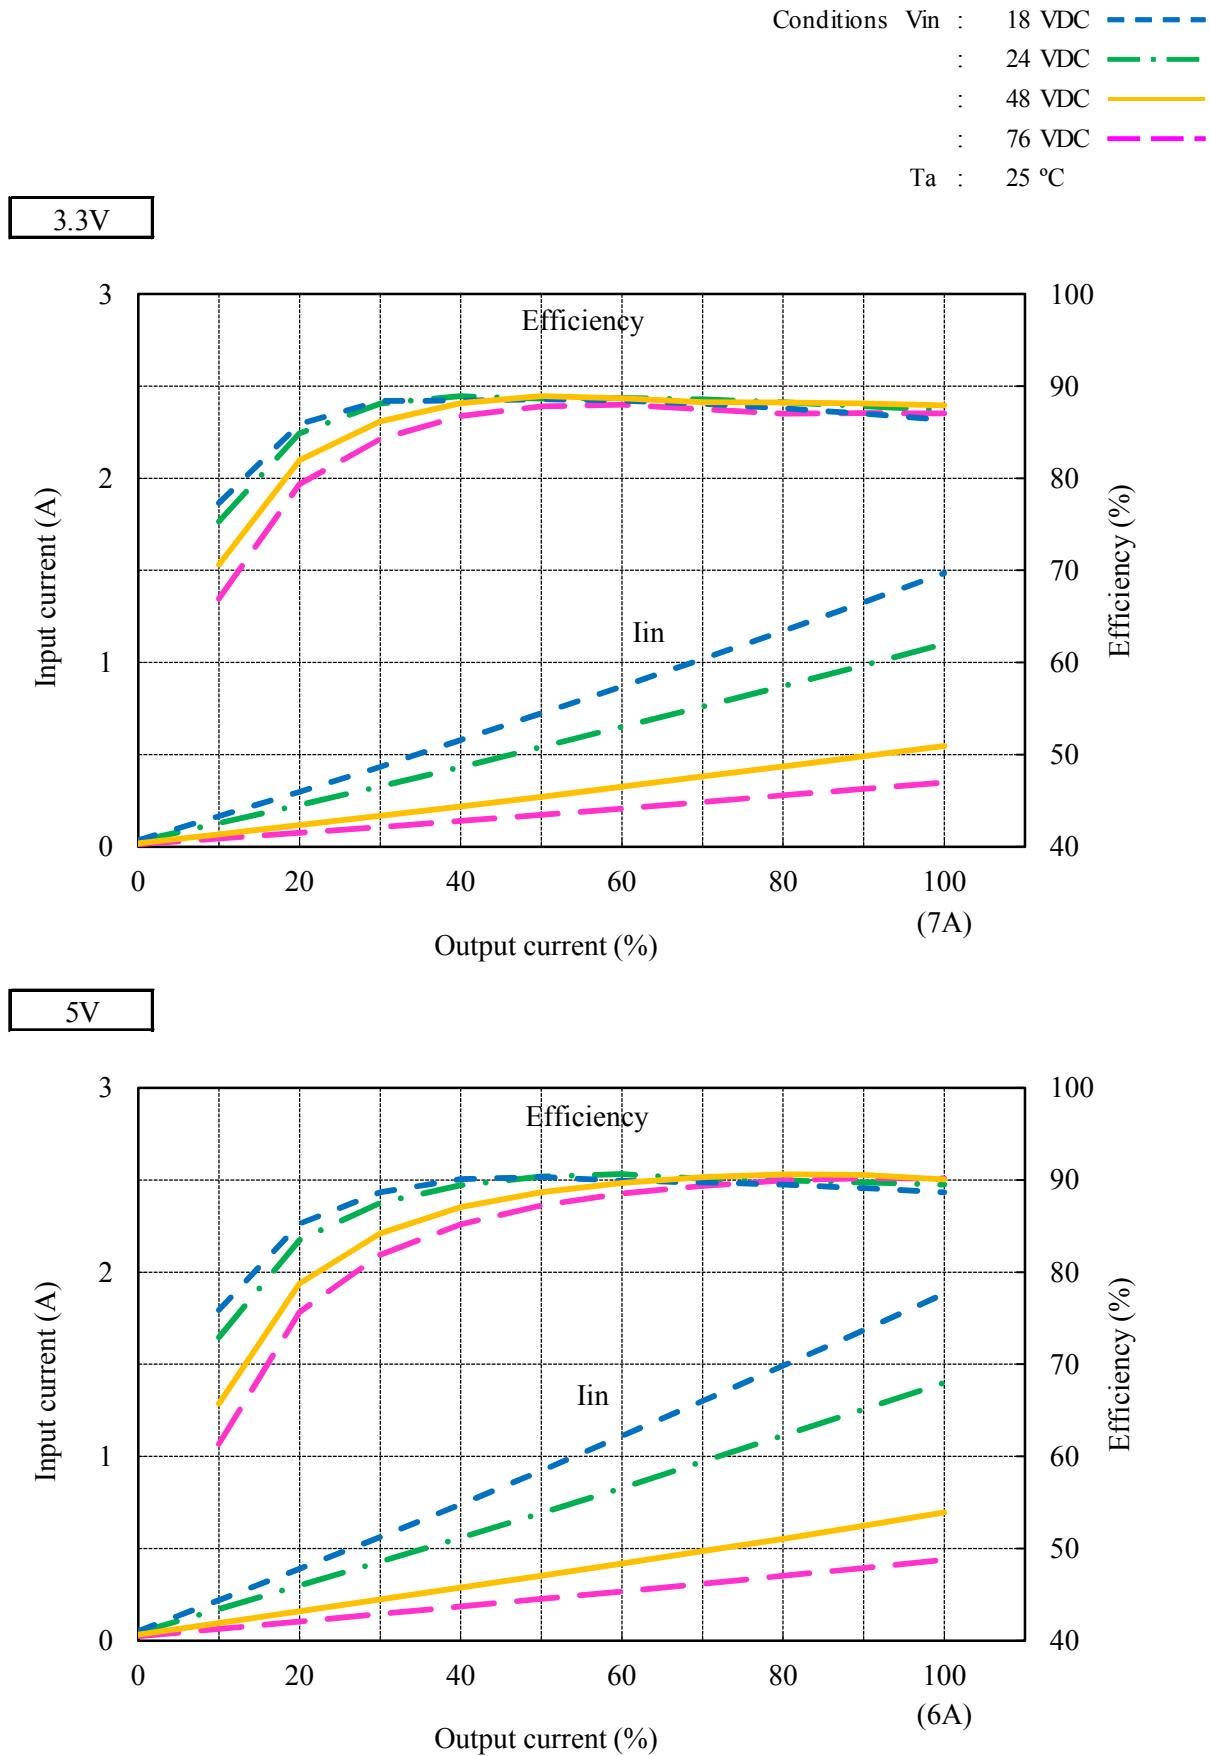

## (3) 入力電流・効率 対 出力電流 Input current and Efficiency vs. Output current

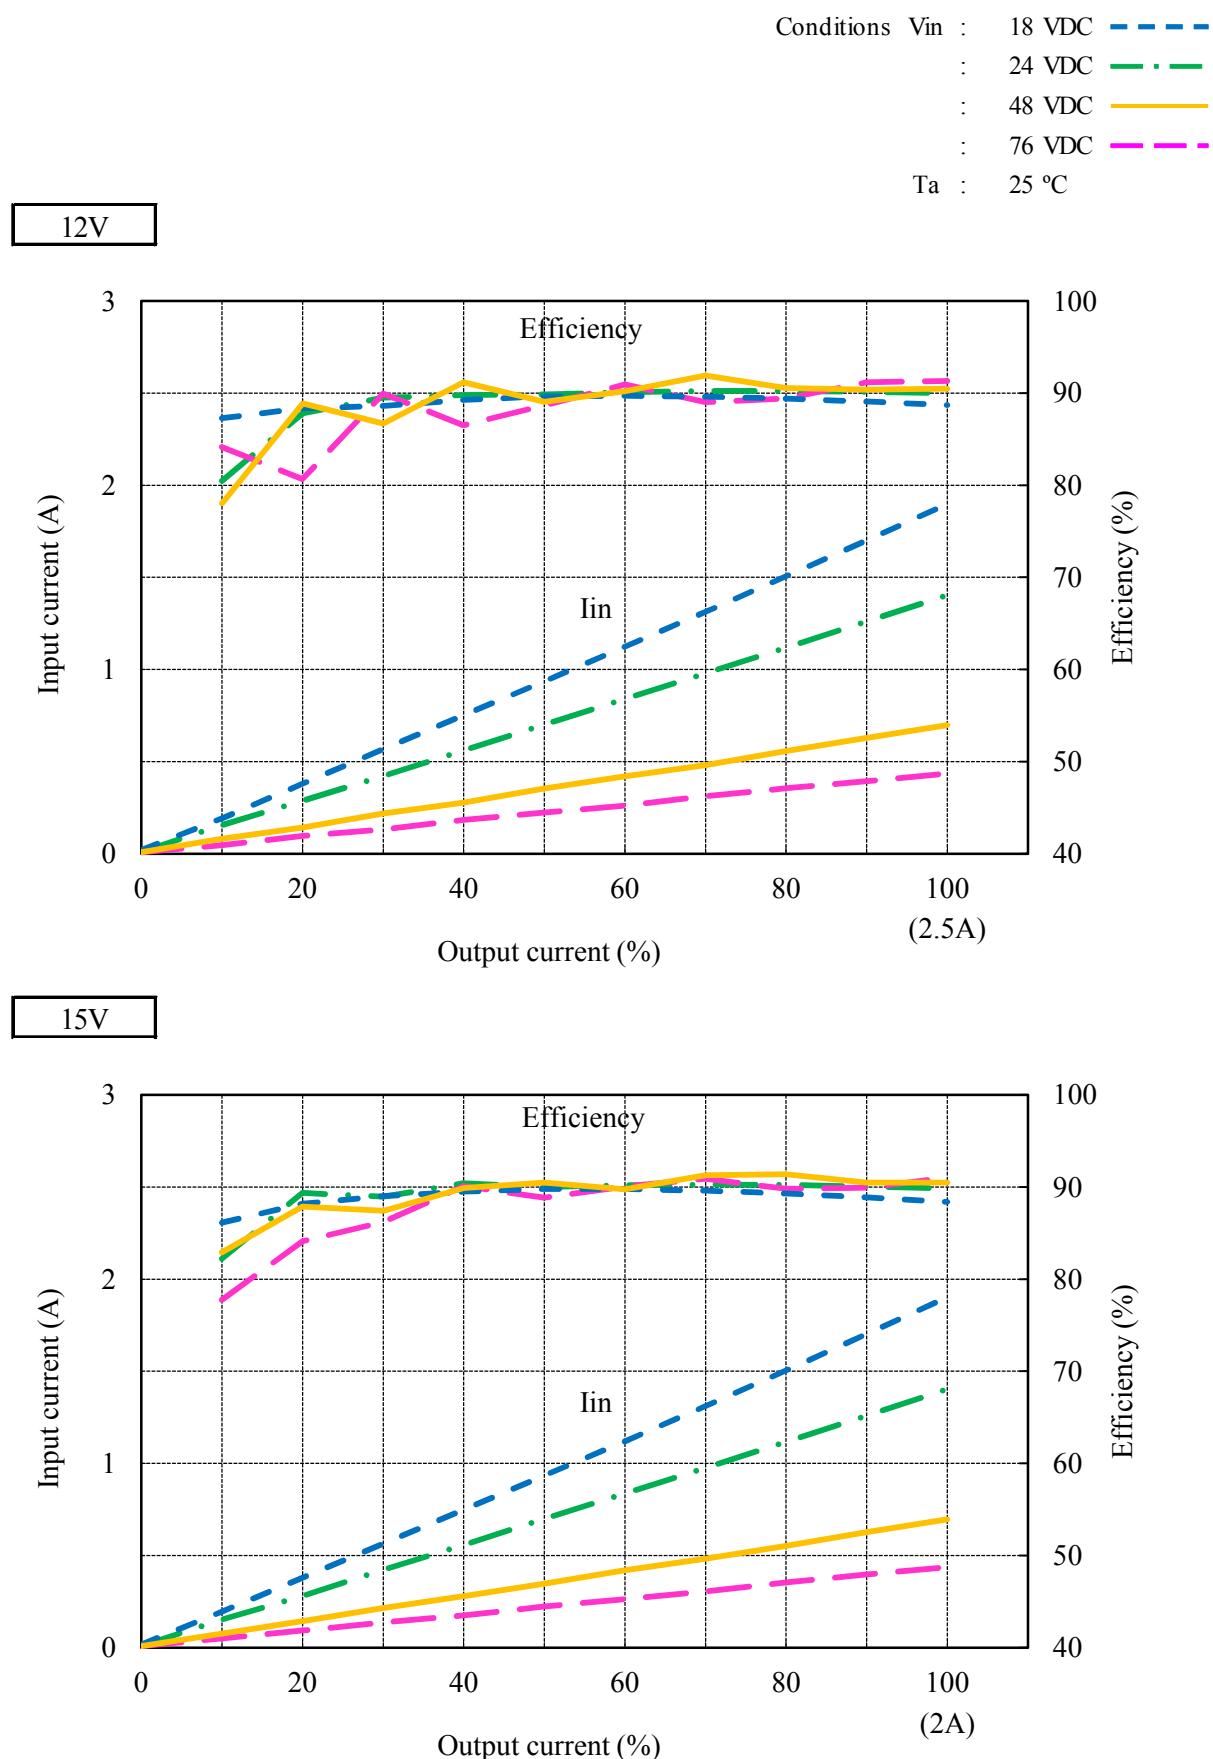


## (4) 効率 対 入力電圧 Efficiency vs. Input voltage

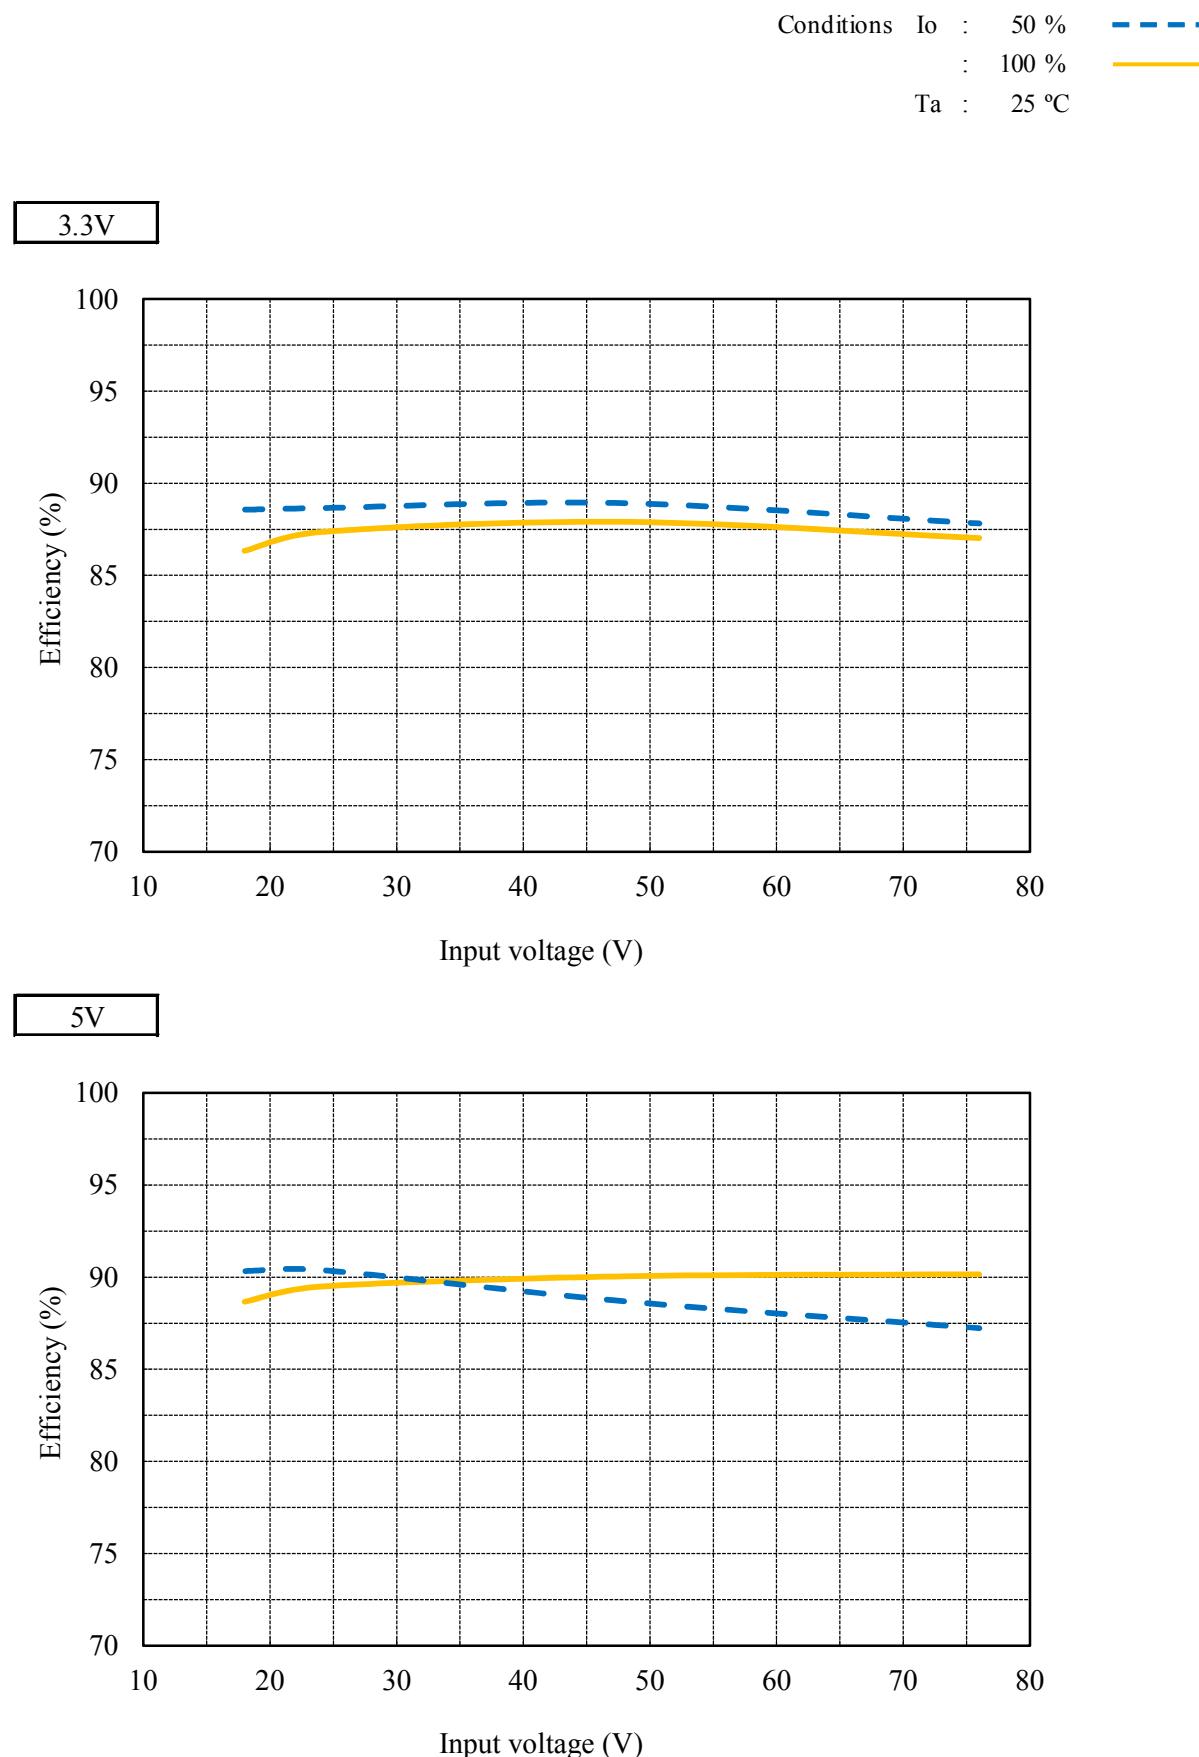


## (4) 効率 対 入力電圧 Efficiency vs. Input voltage

Conditions   Io : 50 %     
                       : 100 %     
                     Ta : 25 °C

12V

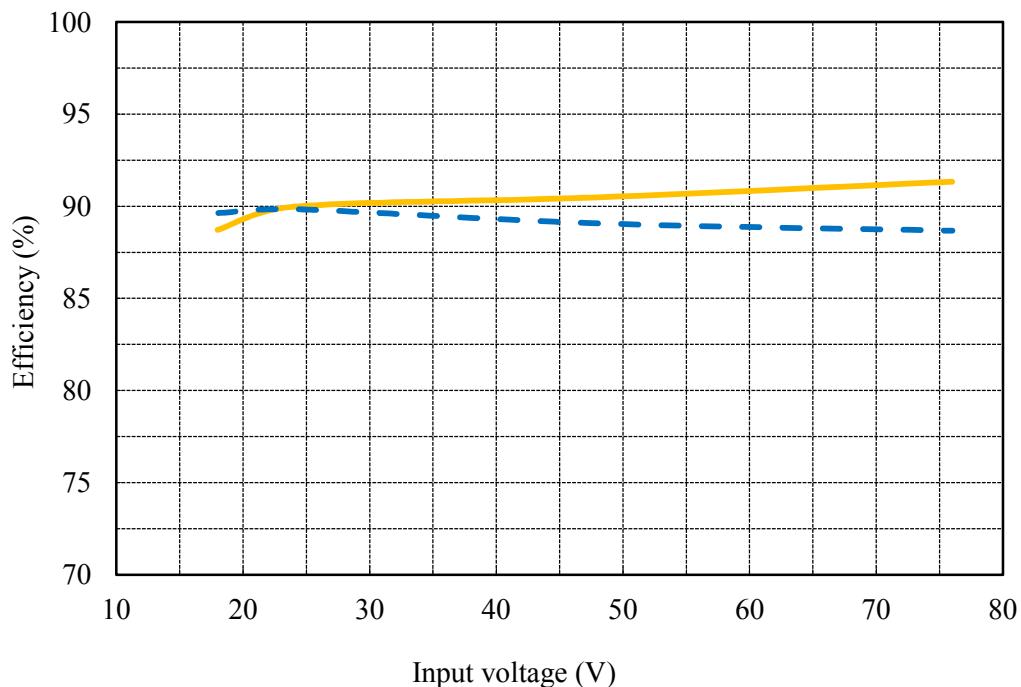

15V

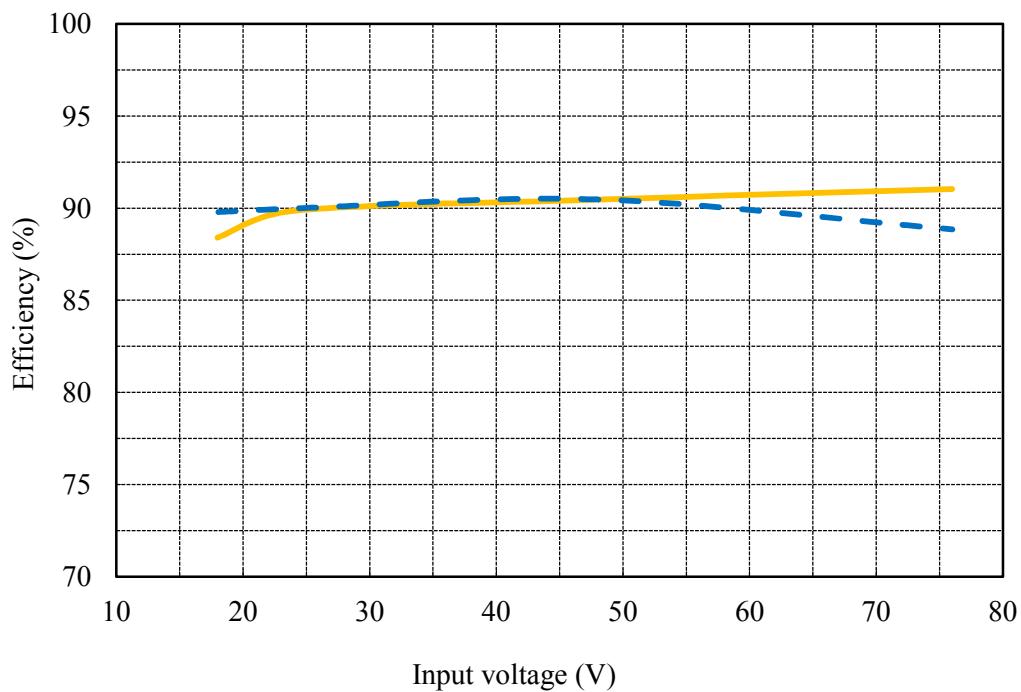


## (5) 起動・遮断電圧特性 Start up and Drop out voltage characteristics

出力電圧 対 入力電圧

Output voltage vs. Input voltage

Conditions Io : 100 %  
Ta : 25 °C

3.3V

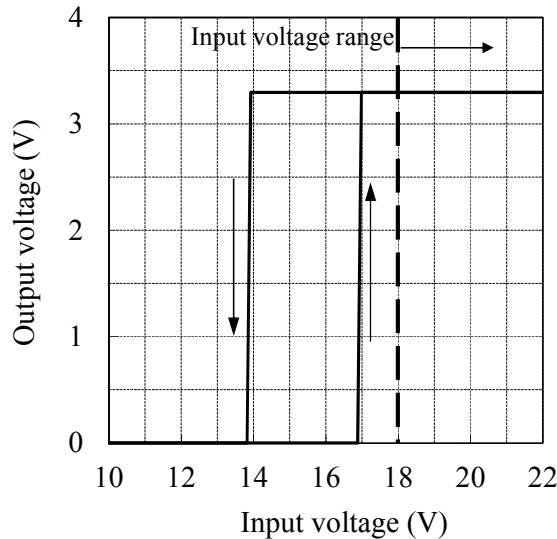


入力電流 対 入力電圧


Input current vs. Input voltage

Conditions Io : 100 %  
Ta : 25 °C


3.3V

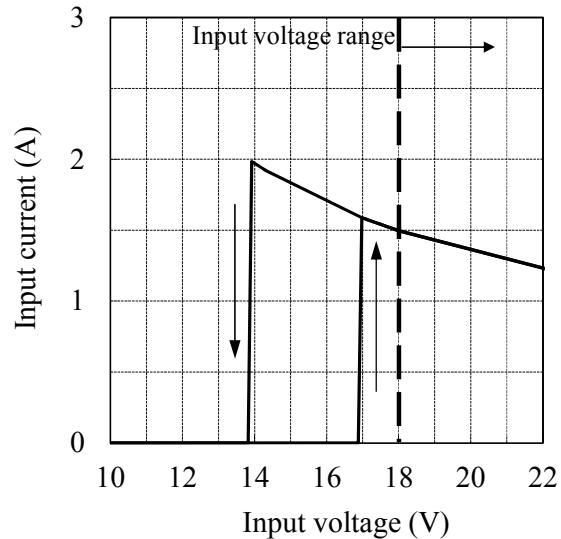

5V

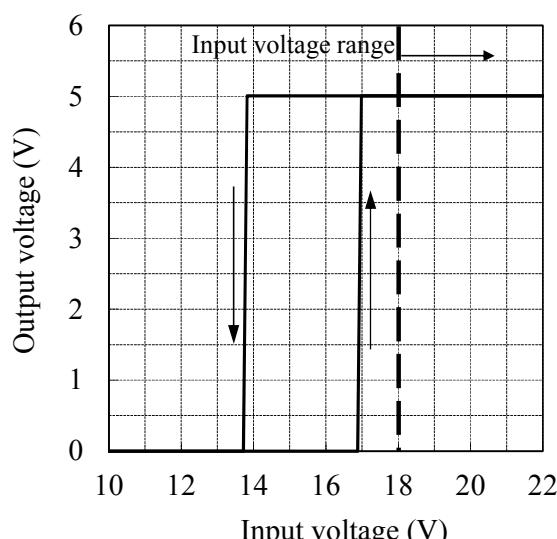

5V

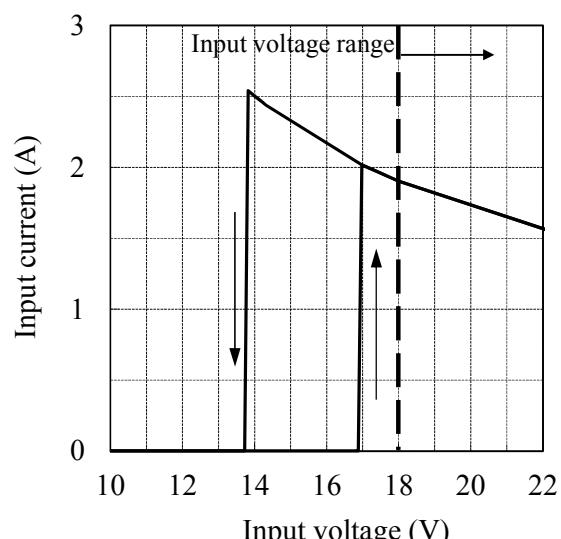


## (5) 起動・遮断電圧特性 Start up and Drop out voltage characteristics

出力電圧 対 入力電圧

Output voltage vs. Input voltage

Conditions Io : 100 %  
Ta : 25 °C

12V

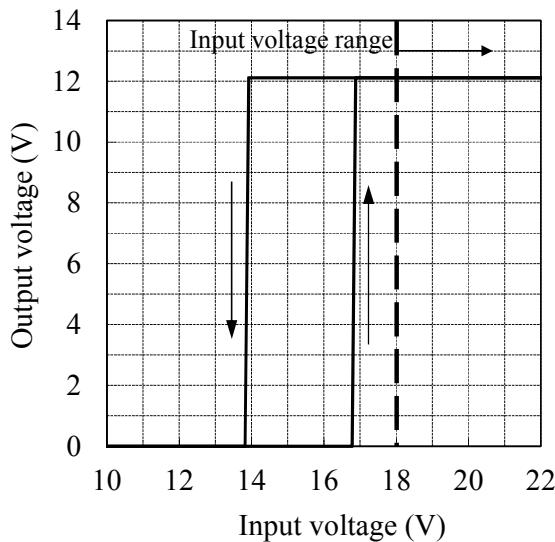


入力電流 対 入力電圧


Input current vs. Input voltage

Conditions Io : 100 %  
Ta : 25 °C


12V

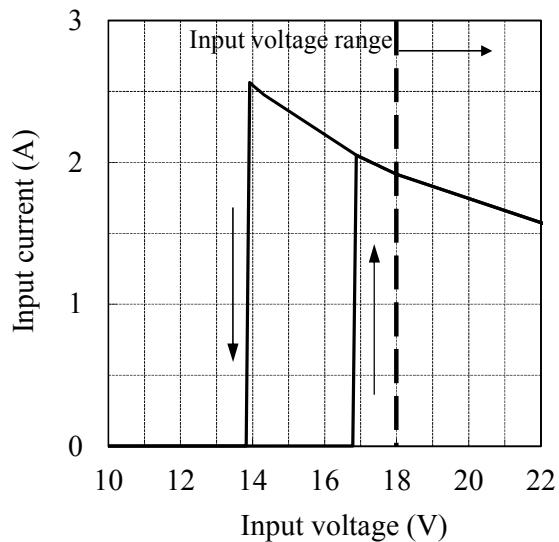

15V

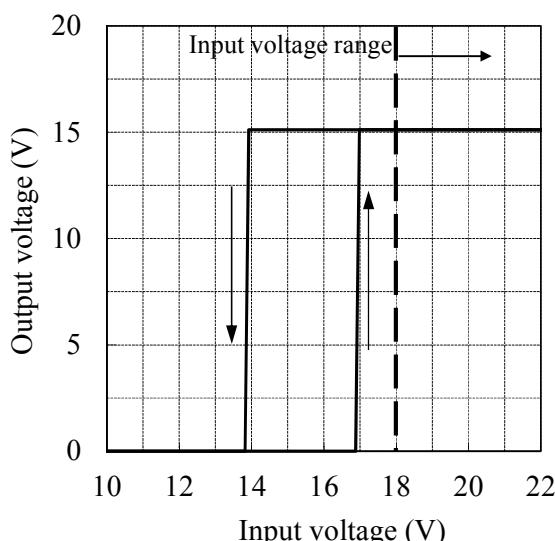


15V

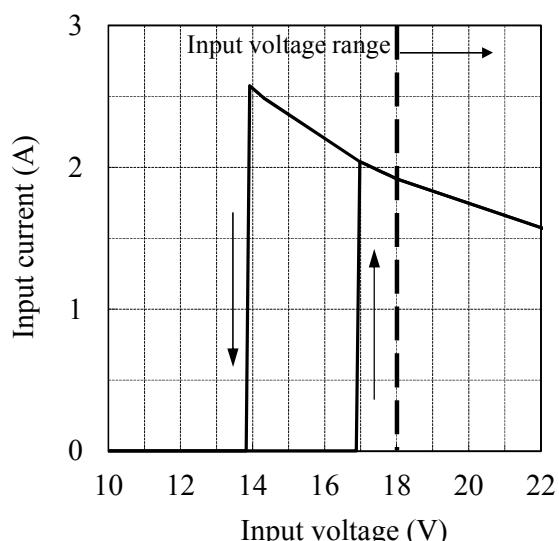


## 2-2. 待機電力特性 Standby power characteristics

Condition Ta : 25 °C

3.3V

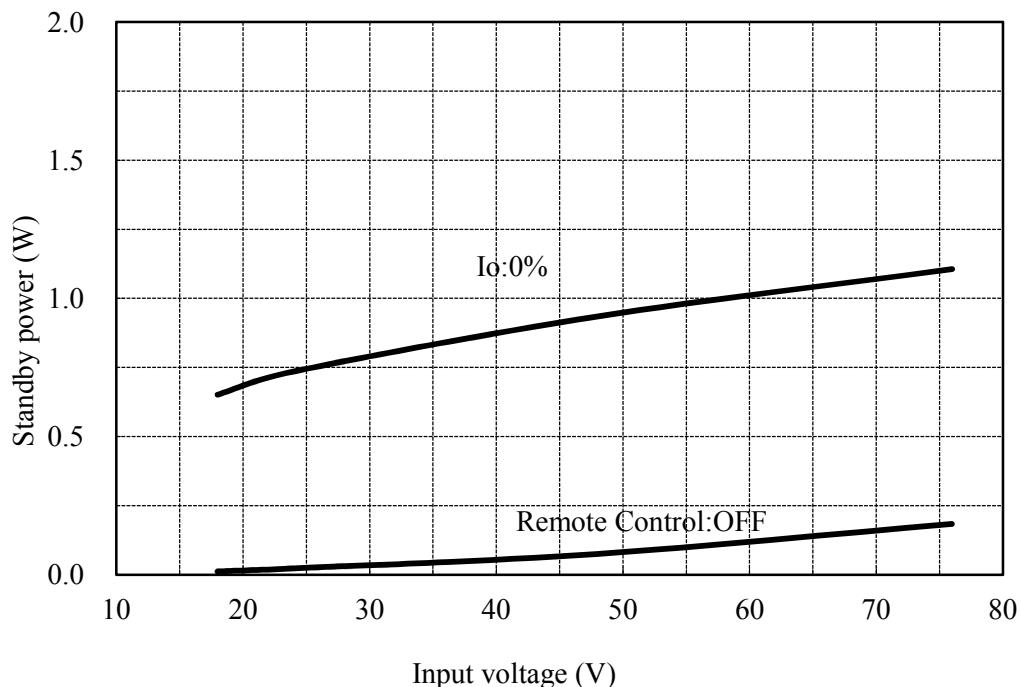


5V

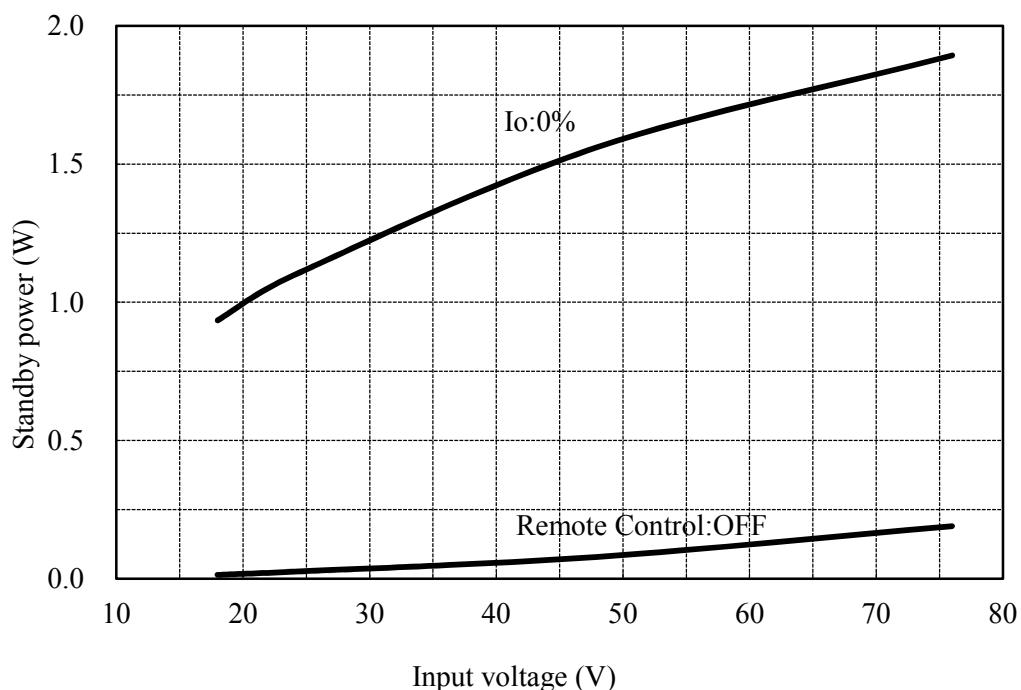


## 2-2. 待機電力特性 Standby power characteristics

Condition Ta : 25 °C

12V

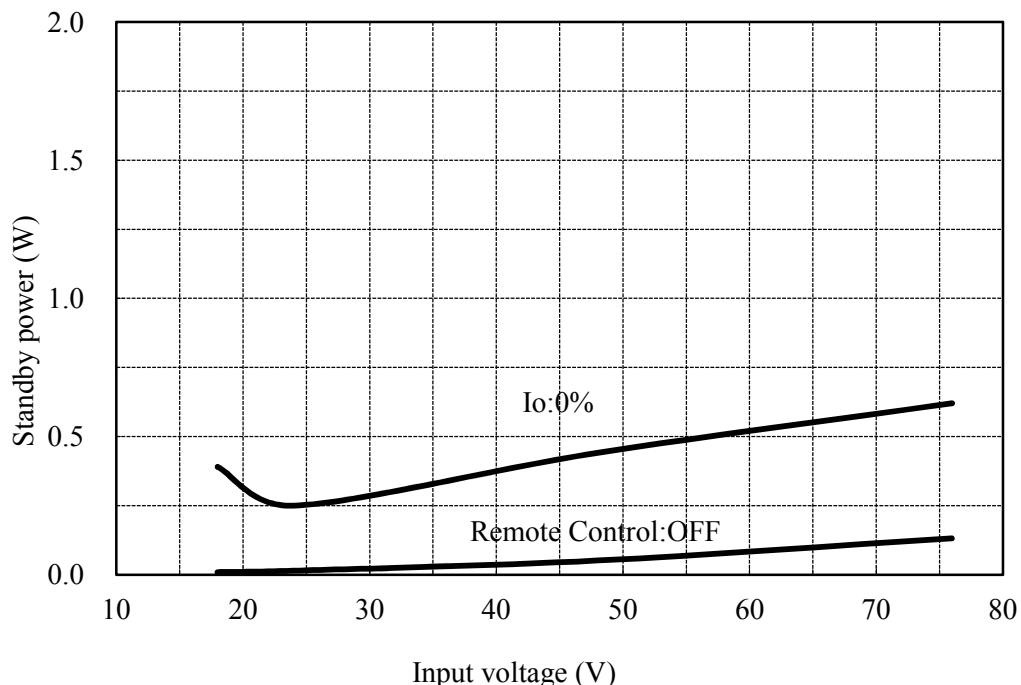


15V

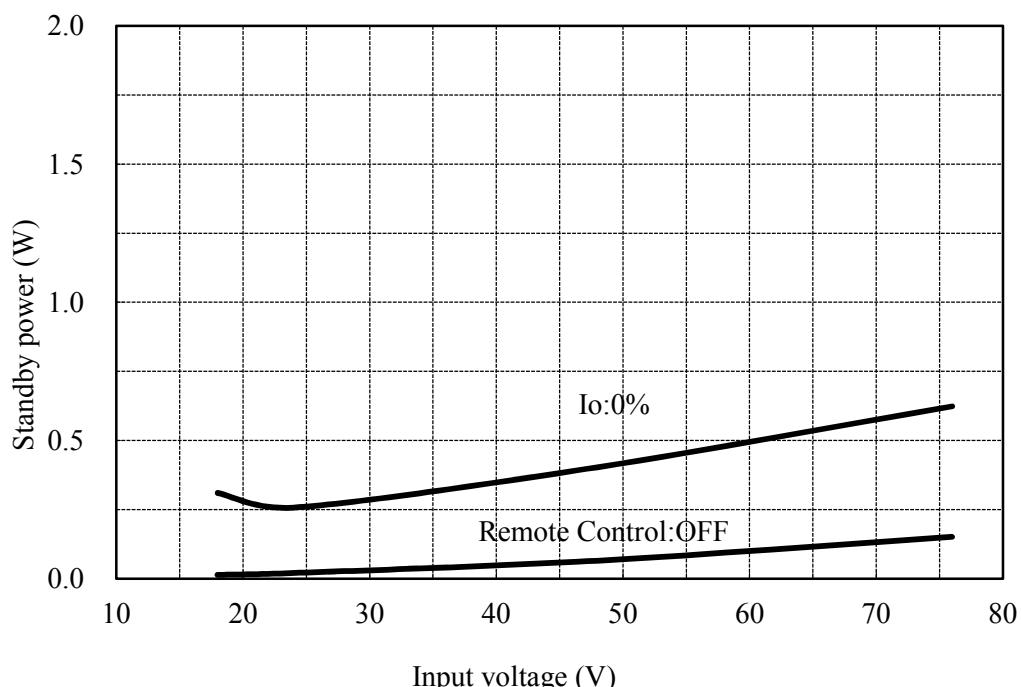


## 2-3. 通電ドリフト特性 Warm up voltage drift characteristics

Conditions Vin : 48 VDC  
Io : 100 %  
Ta : 25 °C

3.3V

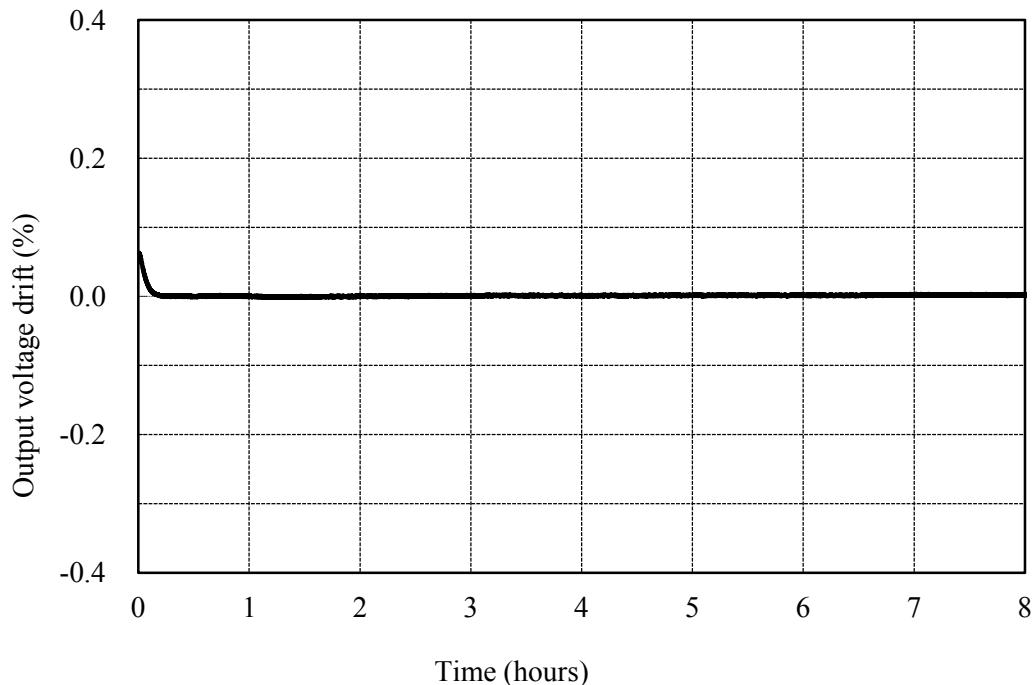


5V

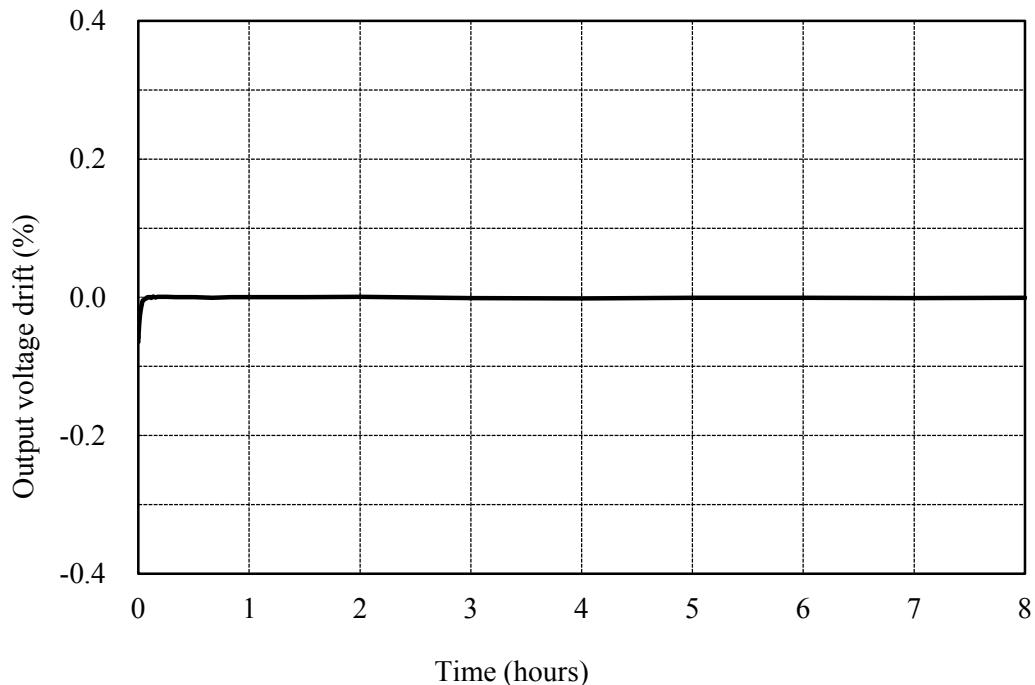


## 2-3. 通電ドリフト特性 Warm up voltage drift characteristics

Conditions Vin : 48 VDC  
Io : 100 %  
Ta : 25 °C

12V

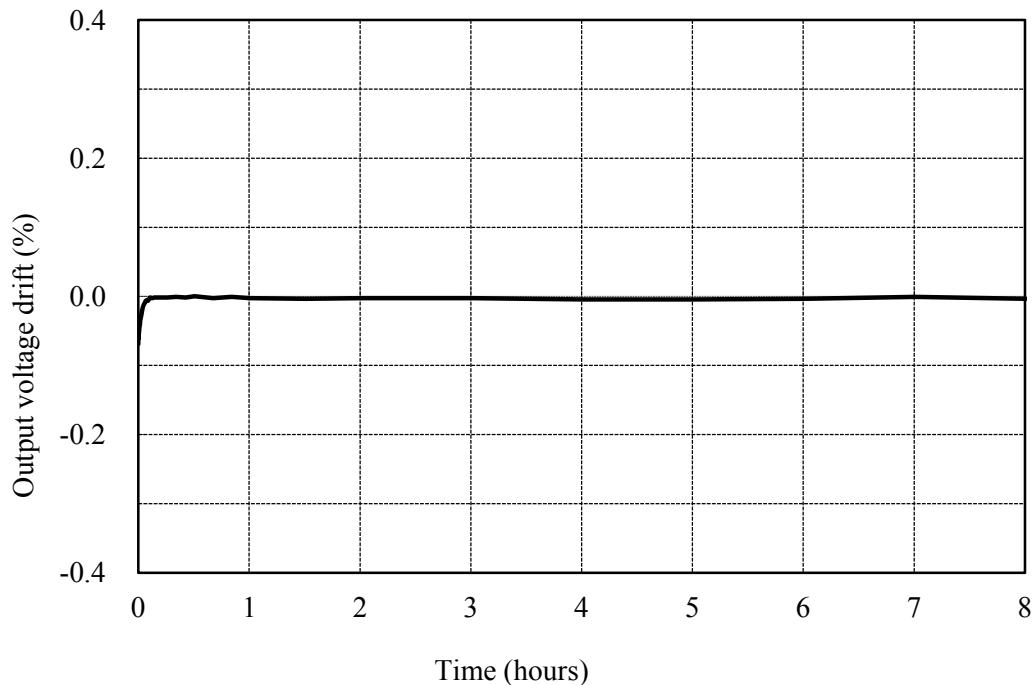

15V

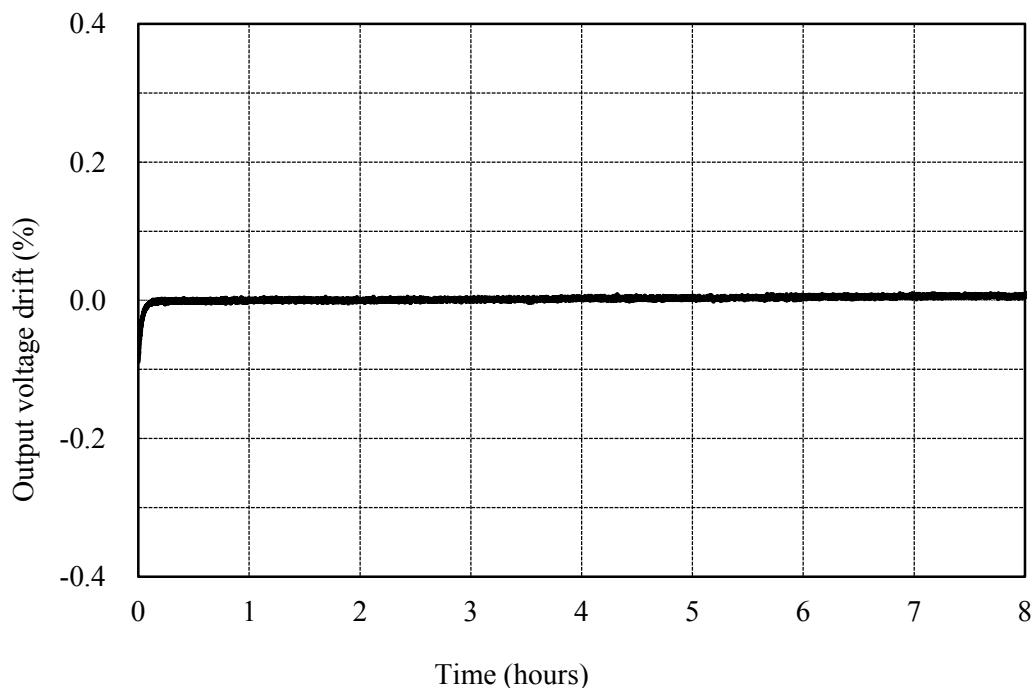

## 2-4. 過電流保護特性 Over current protection (OCP) characteristics


入力電圧依存性

Input voltage dependence

Conditions Vin : 18 VDC   
                  : 24 VDC   
                  : 48 VDC   
                  : 76 VDC

Ta : 25 °C

3.3V

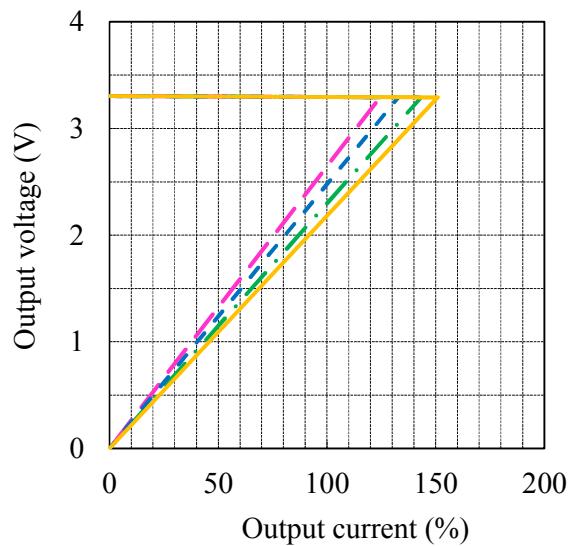


周囲温度依存性


Ambient temperature dependence

Conditions Vin : 48 VDC  
                  Ta : -40 °C   
                   25 °C   
                   85 °C


3.3V

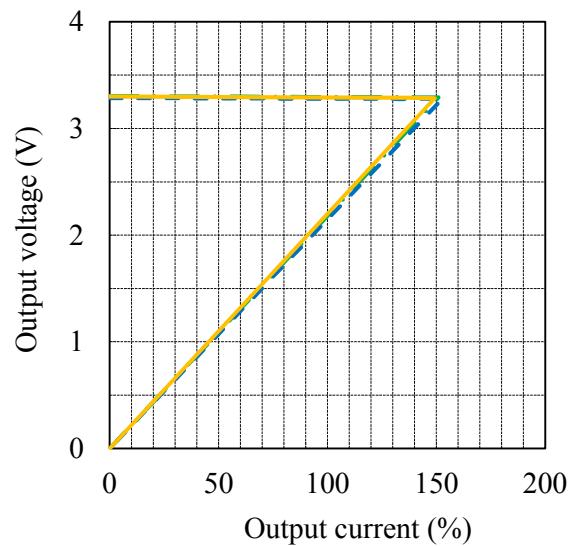

5V

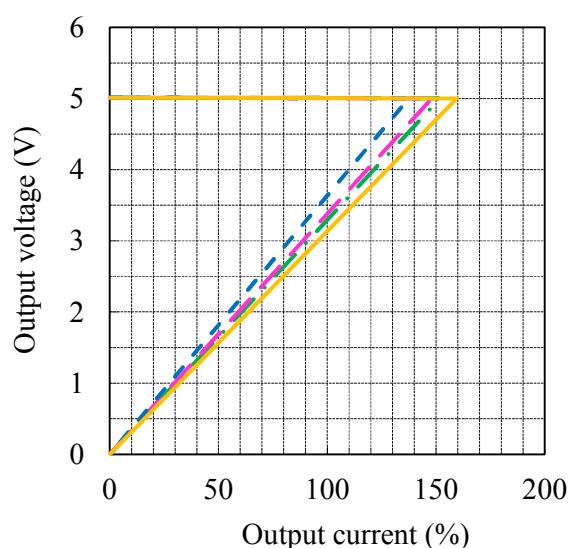

5V

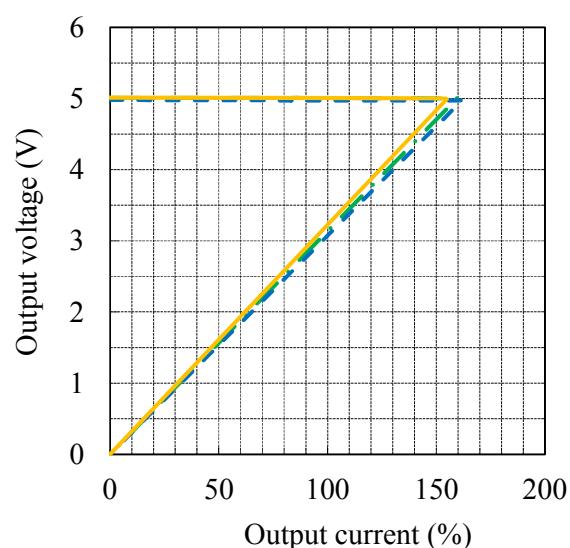

## 2-4. 過電流保護特性 Over current protection (OCP) characteristics


入力電圧依存性

Input voltage dependence

Conditions Vin : 18 VDC   
                  : 24 VDC   
                  : 48 VDC   
                  : 76 VDC

Ta : 25 °C

12V

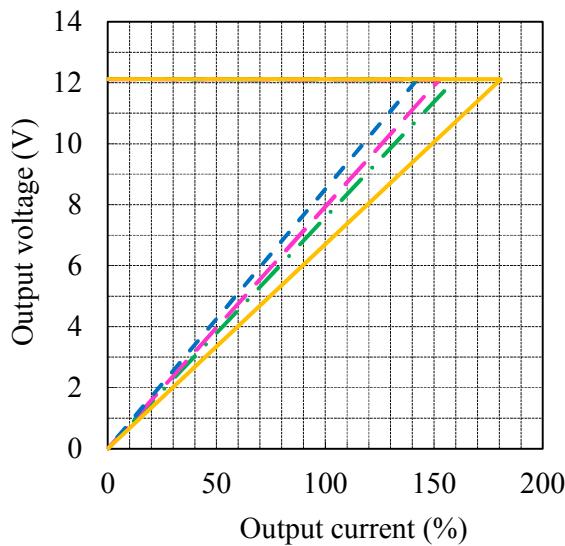


周囲温度依存性


Ambient temperature dependence

Conditions Vin : 48 VDC  
                  Ta : -40 °C   
                  25 °C   
                  85 °C


12V

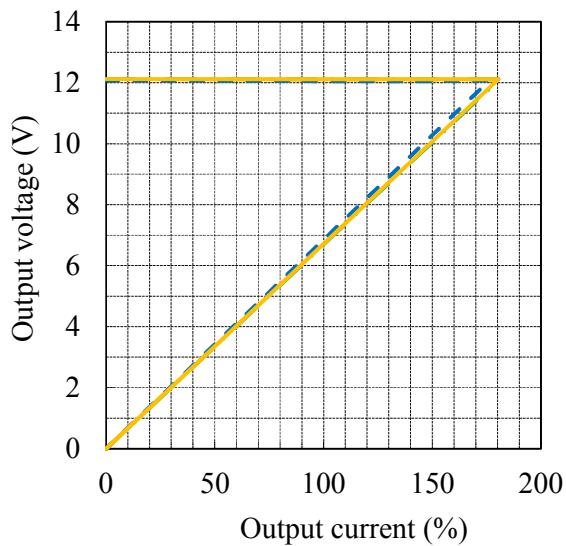

15V


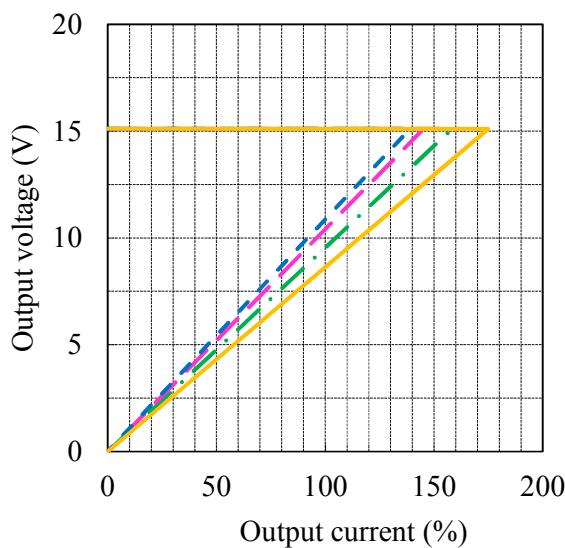


15V

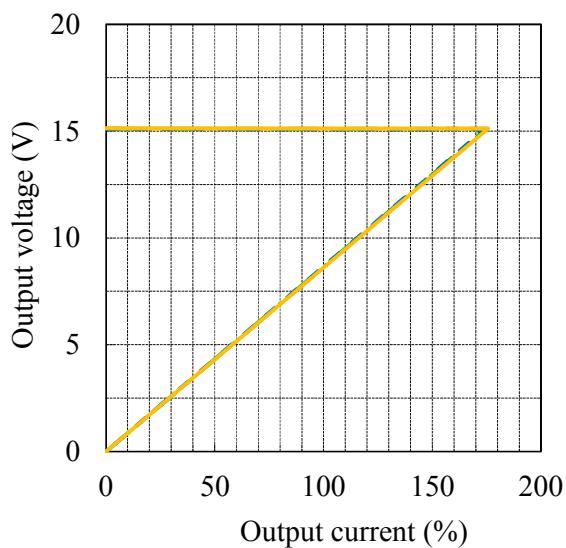



## 2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics

Conditions Vin : 48 VDC  
 Io : 0 %  
 Ta : 25 °C

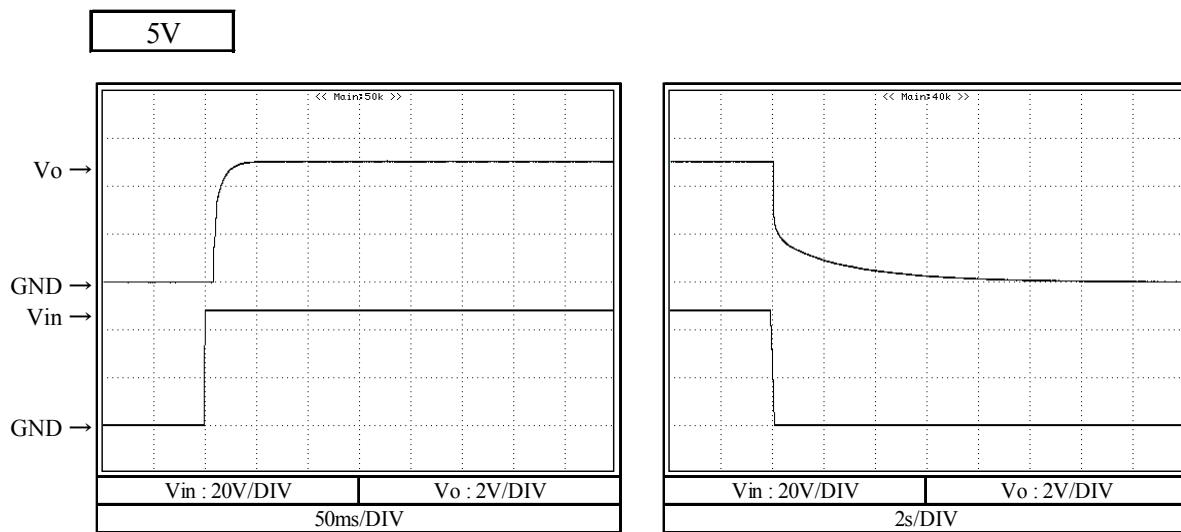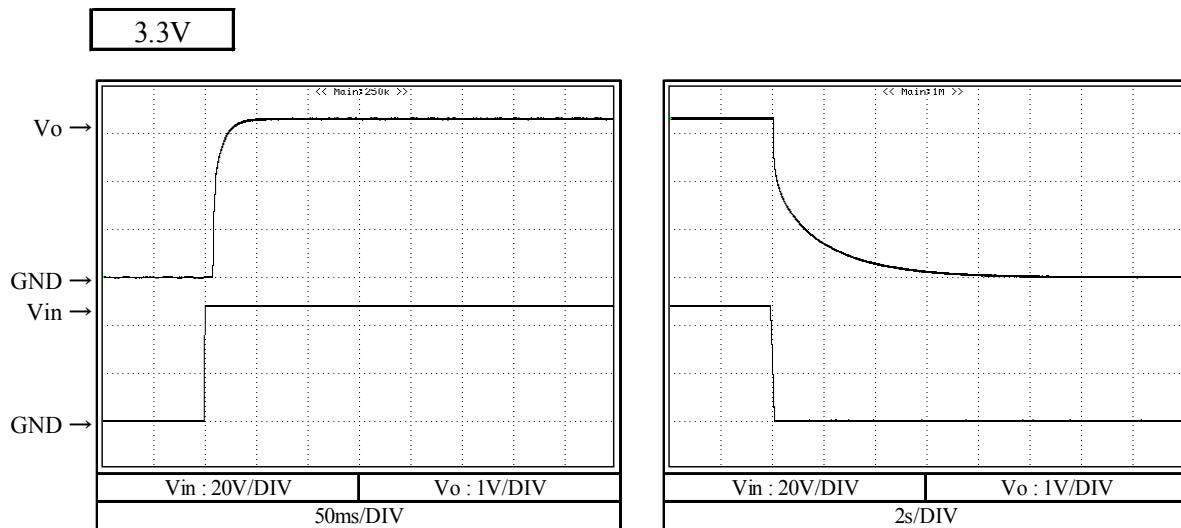



## 2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics

Conditions Vin : 48 VDC  
 Io : 0 %  
 Ta : 25 °C

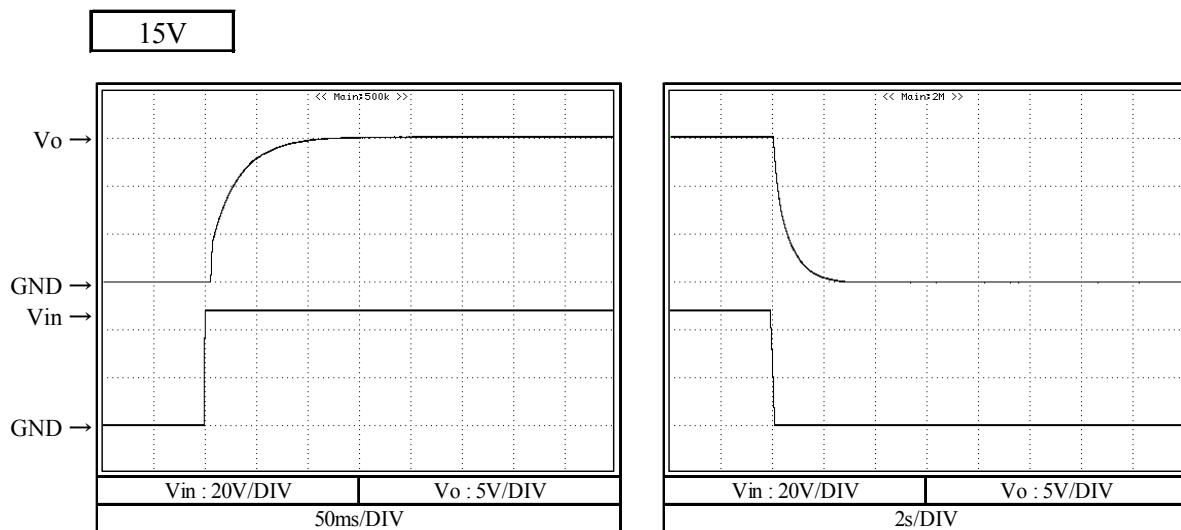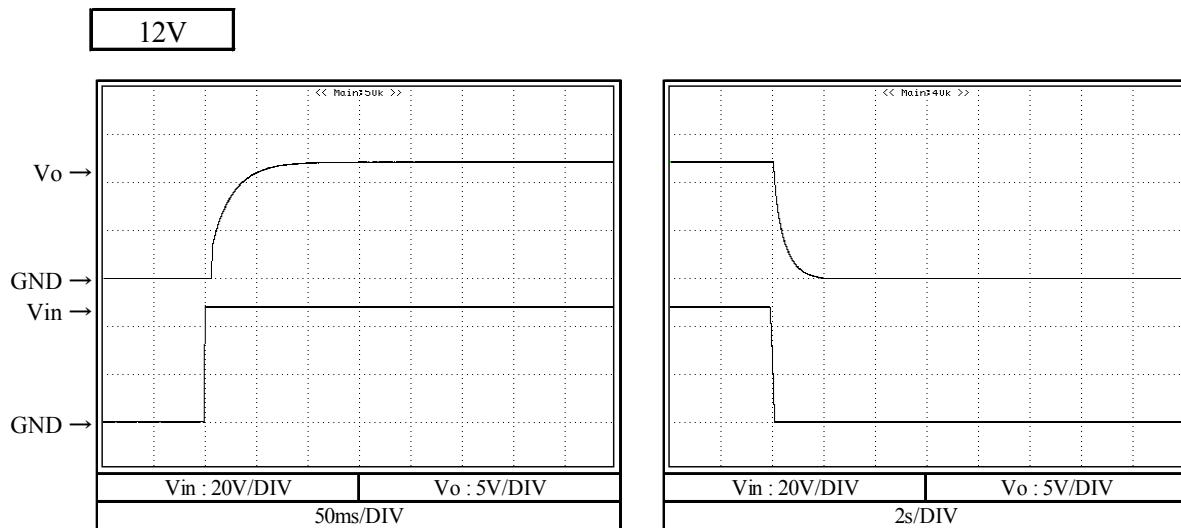



## 2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C

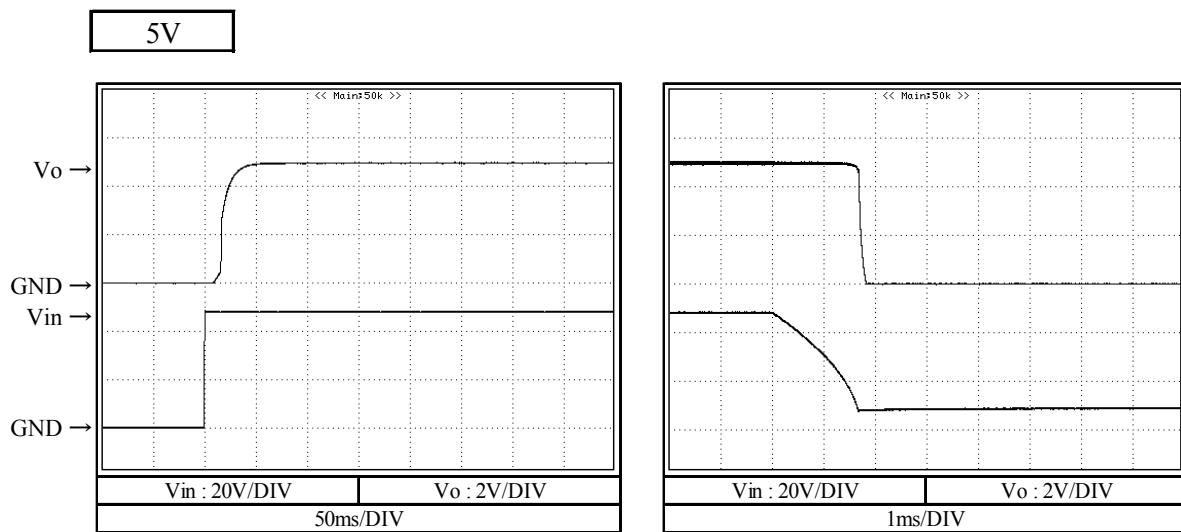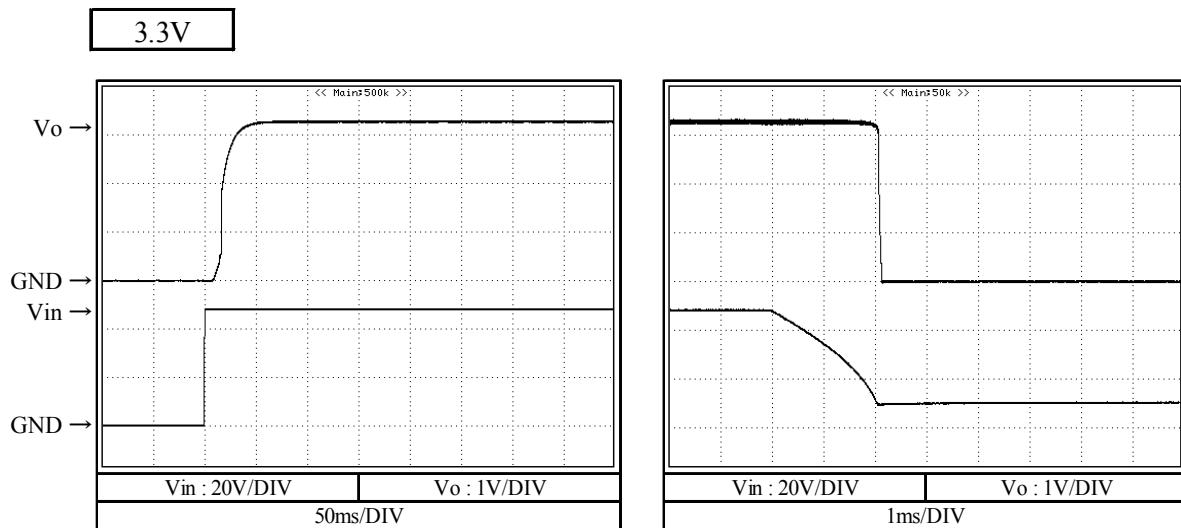

## 2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C

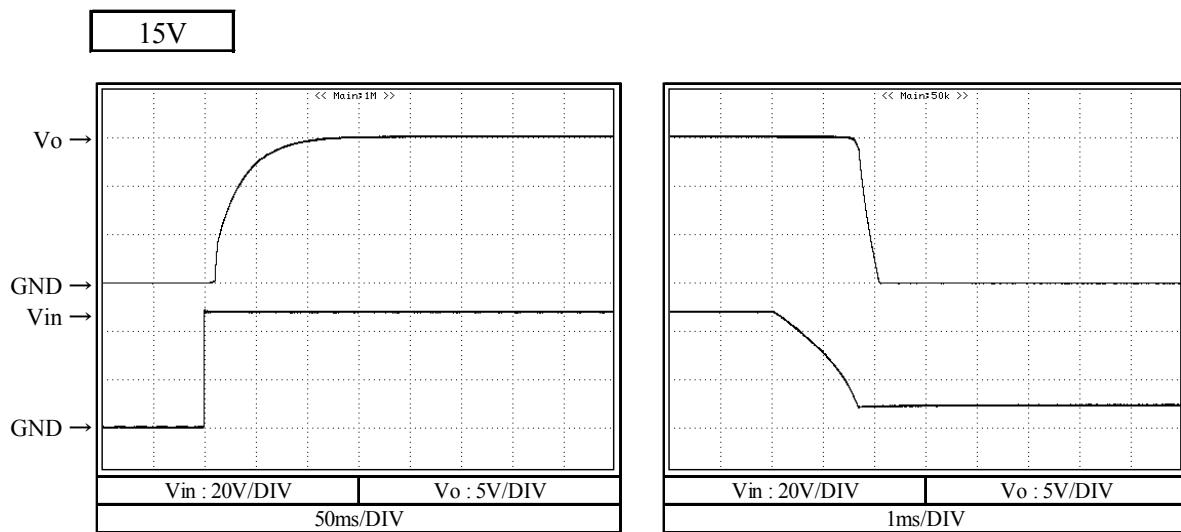
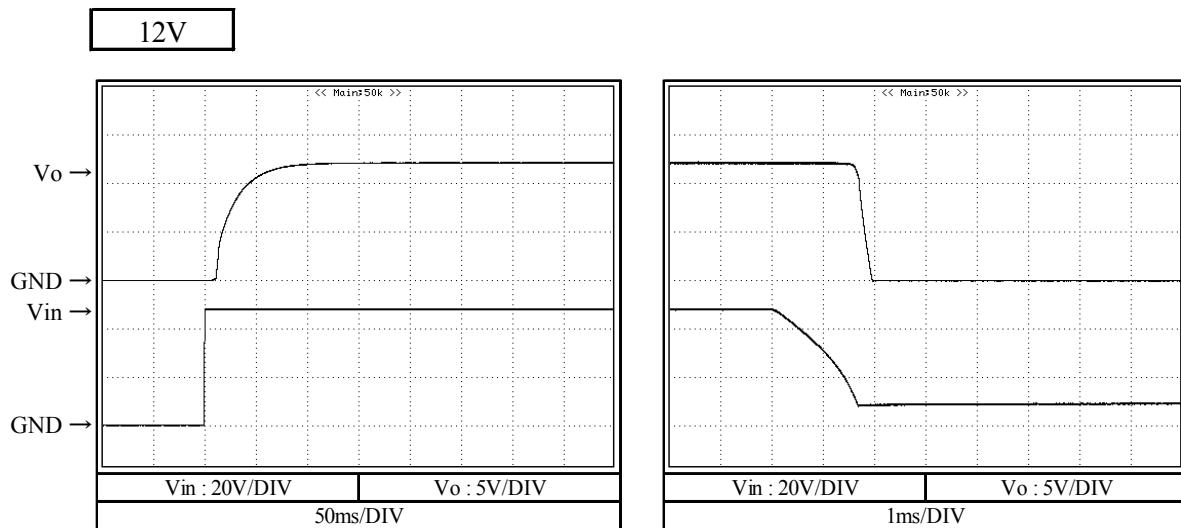


## 2-5. 出力立ち上がり・立ち下がり特性 (リモートON/OFFコントロール時)



Output rise and fall characteristics with REMOTE ON/OFF CONTROL

Conditions   Vin : 48 VDC  
 Io : 0 %  
 Ta : 25 °C

3.3V

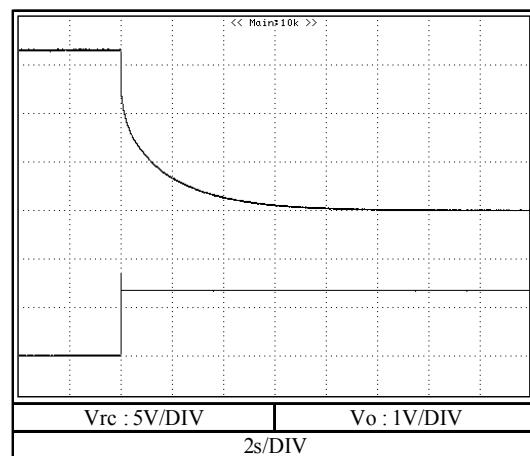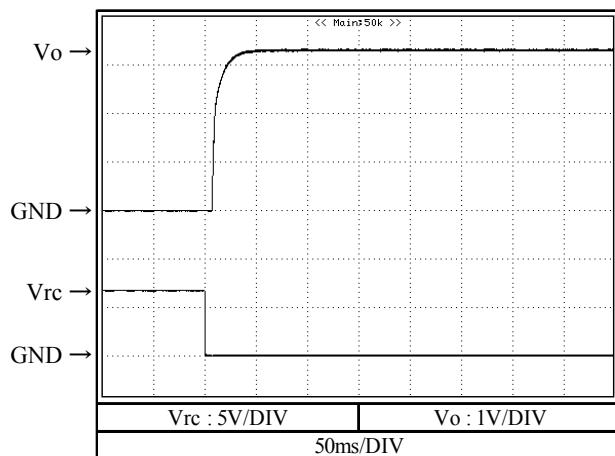

5V

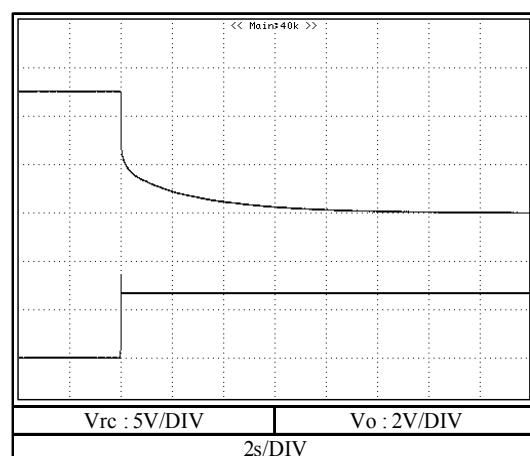
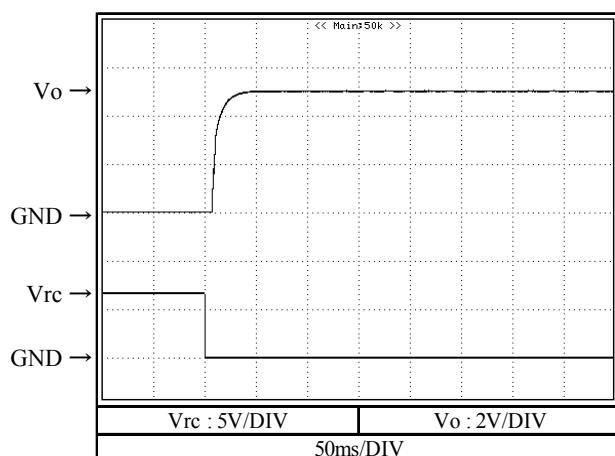


## 2-5. 出力立ち上がり・立ち下がり特性 (リモートON/OFFコントロール時)



Output rise and fall characteristics with REMOTE ON/OFF CONTROL

Conditions Vin : 48 VDC  
 Io : 0 %  
 Ta : 25 °C

12V

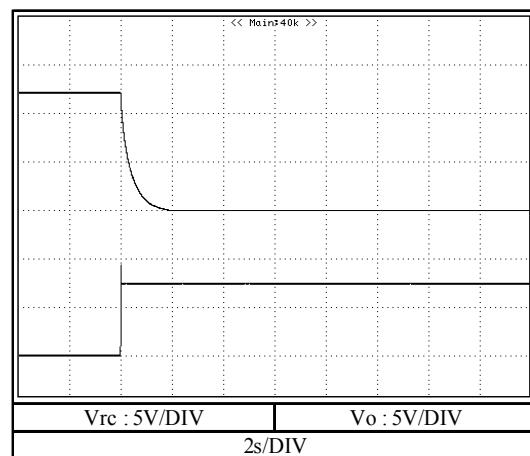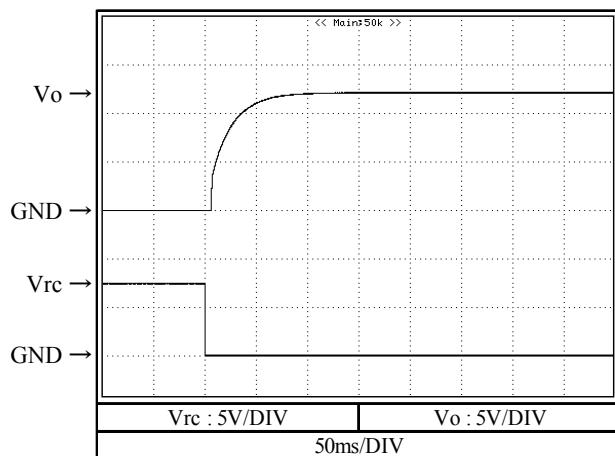

15V

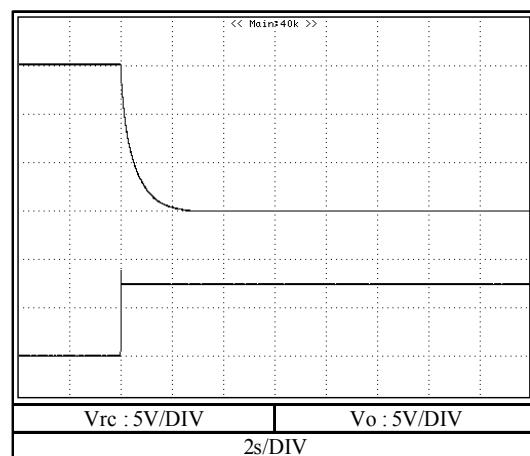
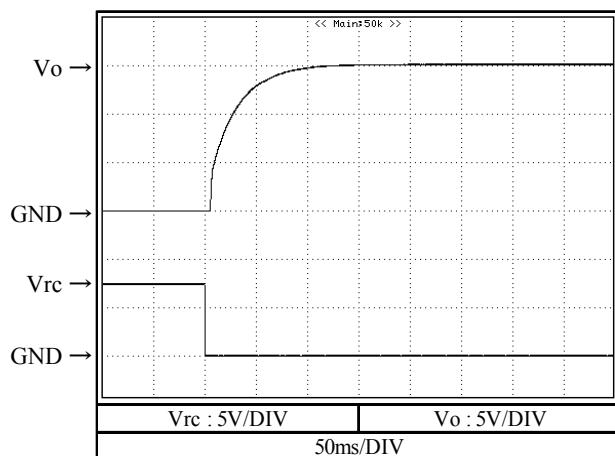


## 2-5. 出力立ち上がり・立ち下がり特性 (リモートON/OFFコントロール時)



Output rise and fall characteristics with REMOTE ON/OFF CONTROL

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C

3.3V

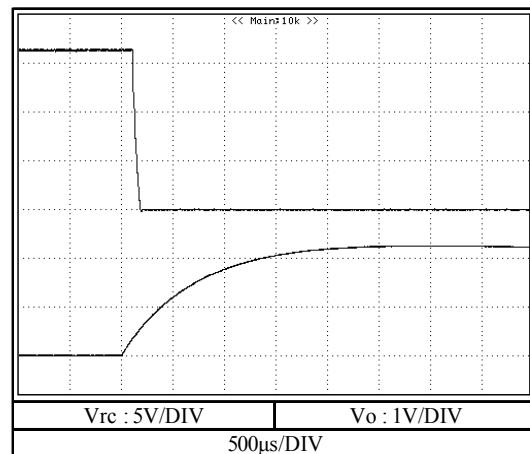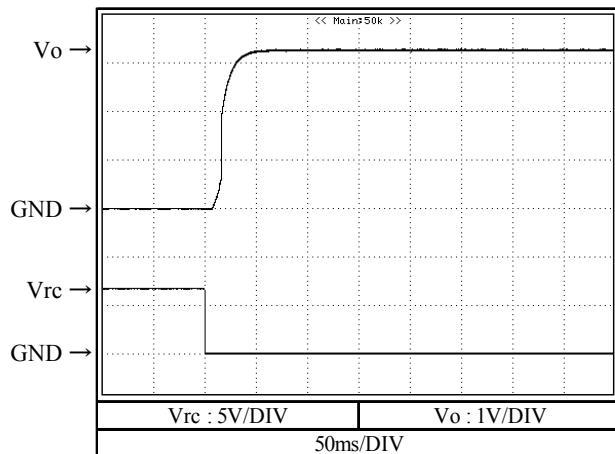

5V

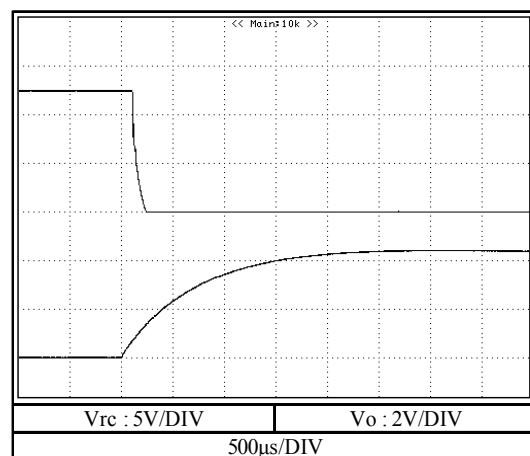
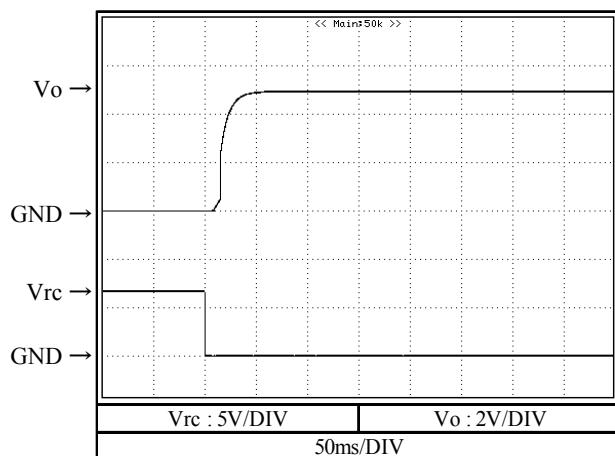


## 2-5. 出力立ち上がり・立ち下がり特性 (リモートON/OFFコントロール時)



Output rise and fall characteristics with REMOTE ON/OFF CONTROL

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C

12V

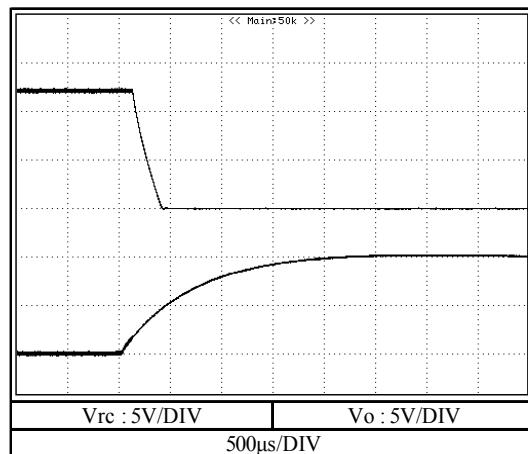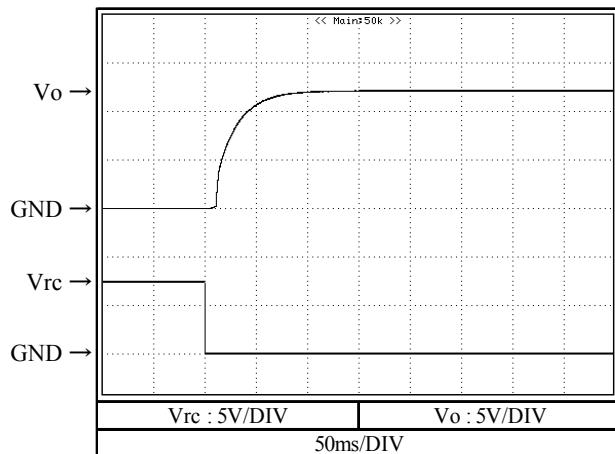


15V

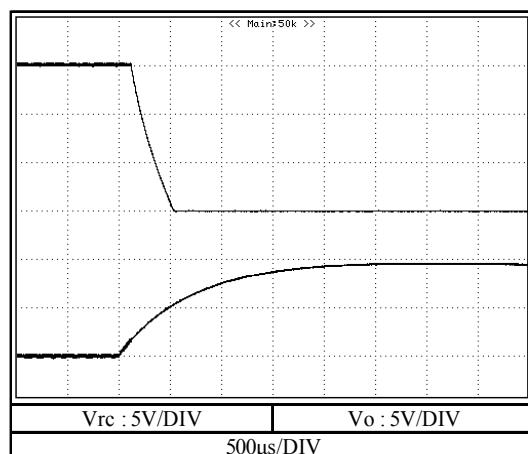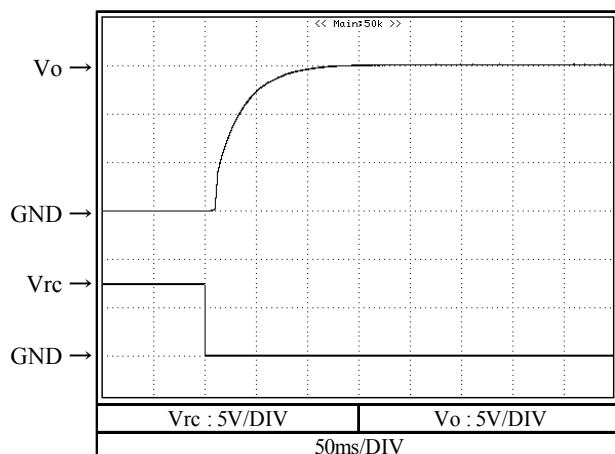


## 2-6. 過渡応答(負荷急変)特性 Dynamic load response characteristics

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C

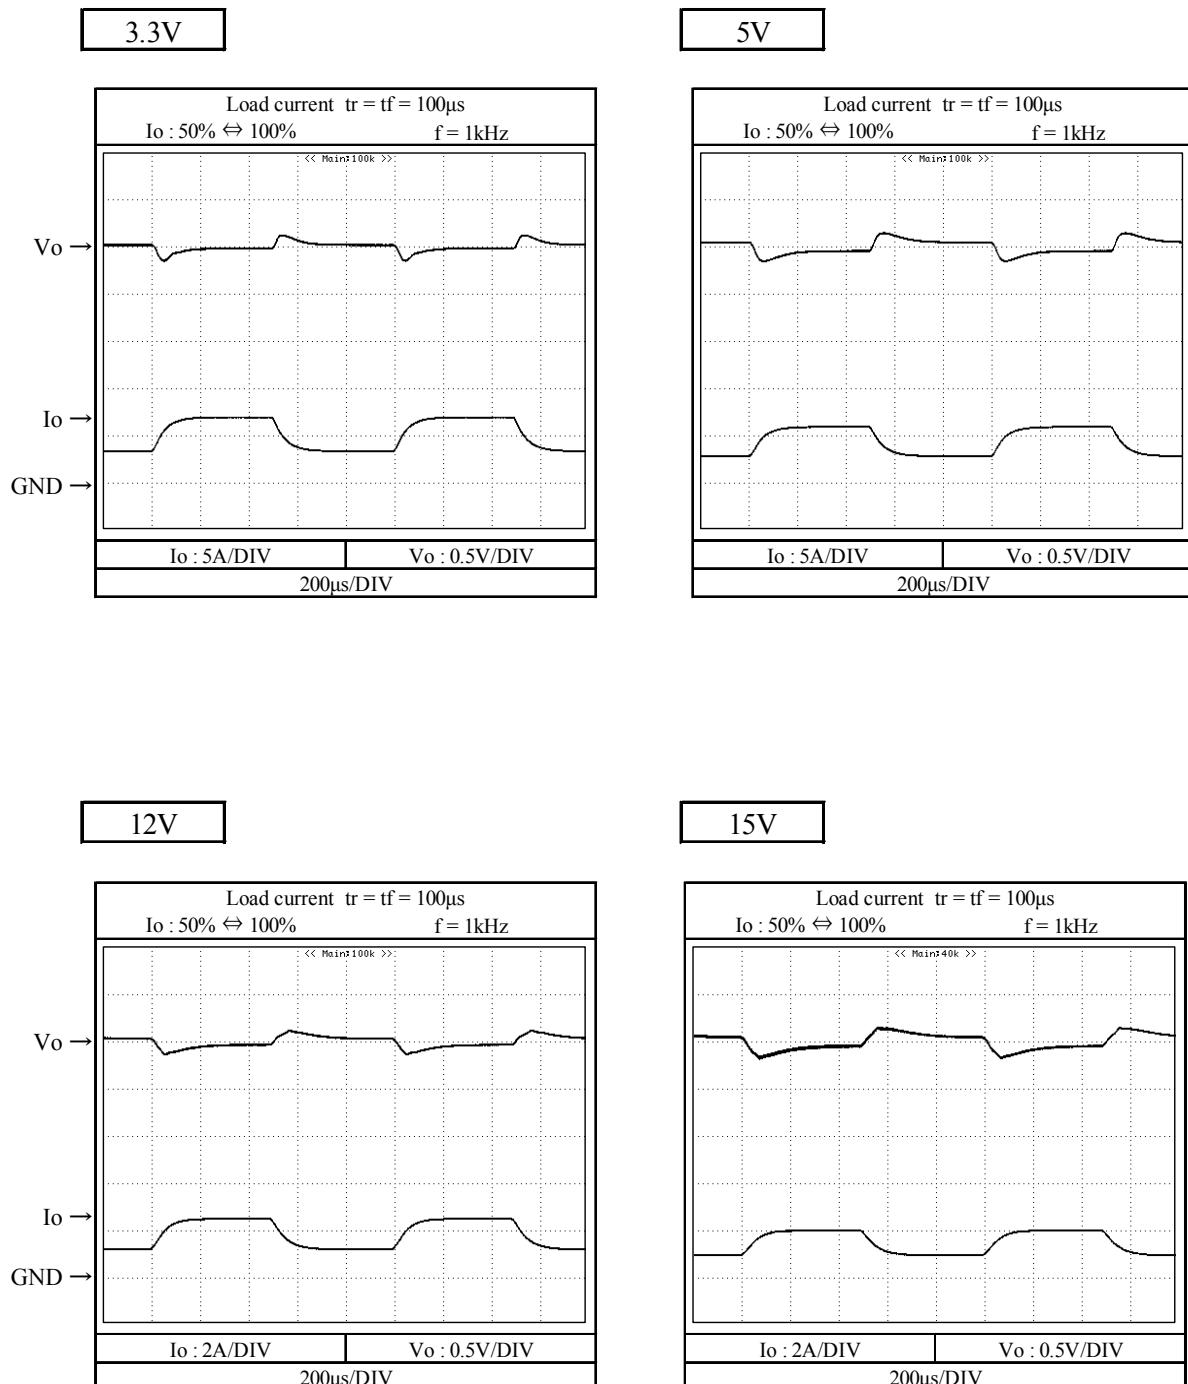





## 2-7. 入力サージ電流(突入電流)特性 Inrush current characteristics

Conditions Vin : 48 VDC  
Io : 100 %  
Ta : 25 °C

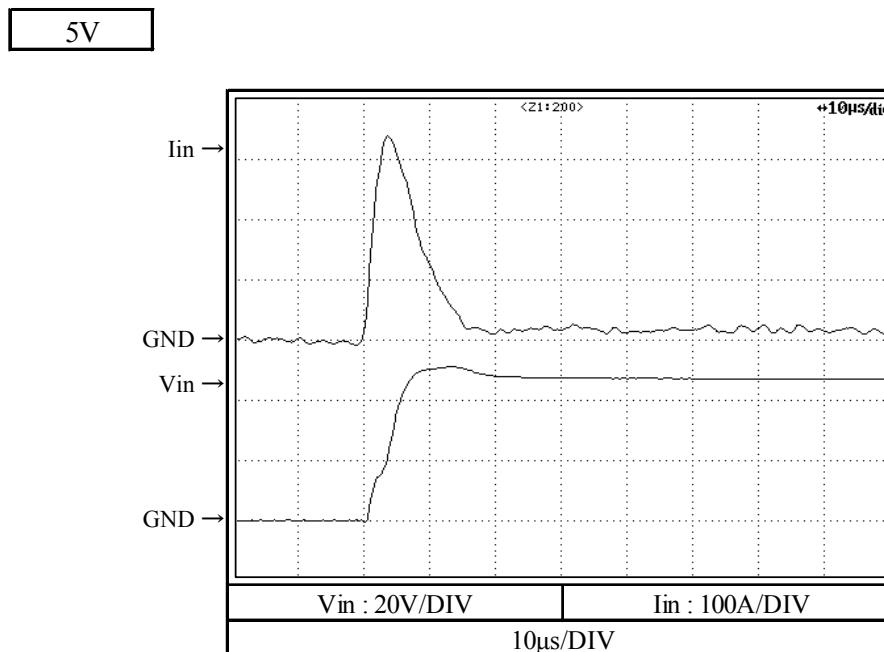

## 2-8. 出力リップル、ノイズ波形 Output ripple and noise waveform


Conditions Vin : 48 VDC  
Io : 100 %  
Ta : 25 °C

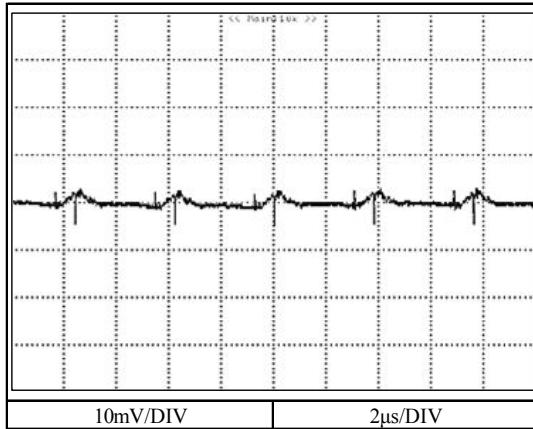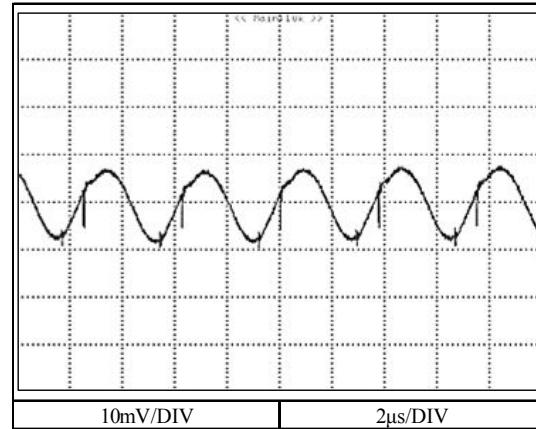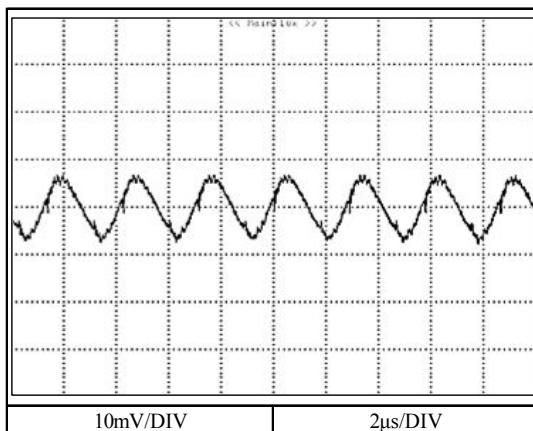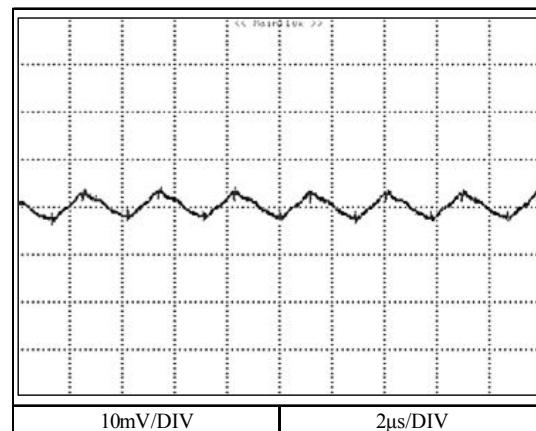**3.3V****5V****12V****15V**

## 2-9. EMI特性 Electro-Magnetic Interference characteristics

(a) 雜音端子電圧 (帰還ノイズ) Conducted Emission Noise

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C


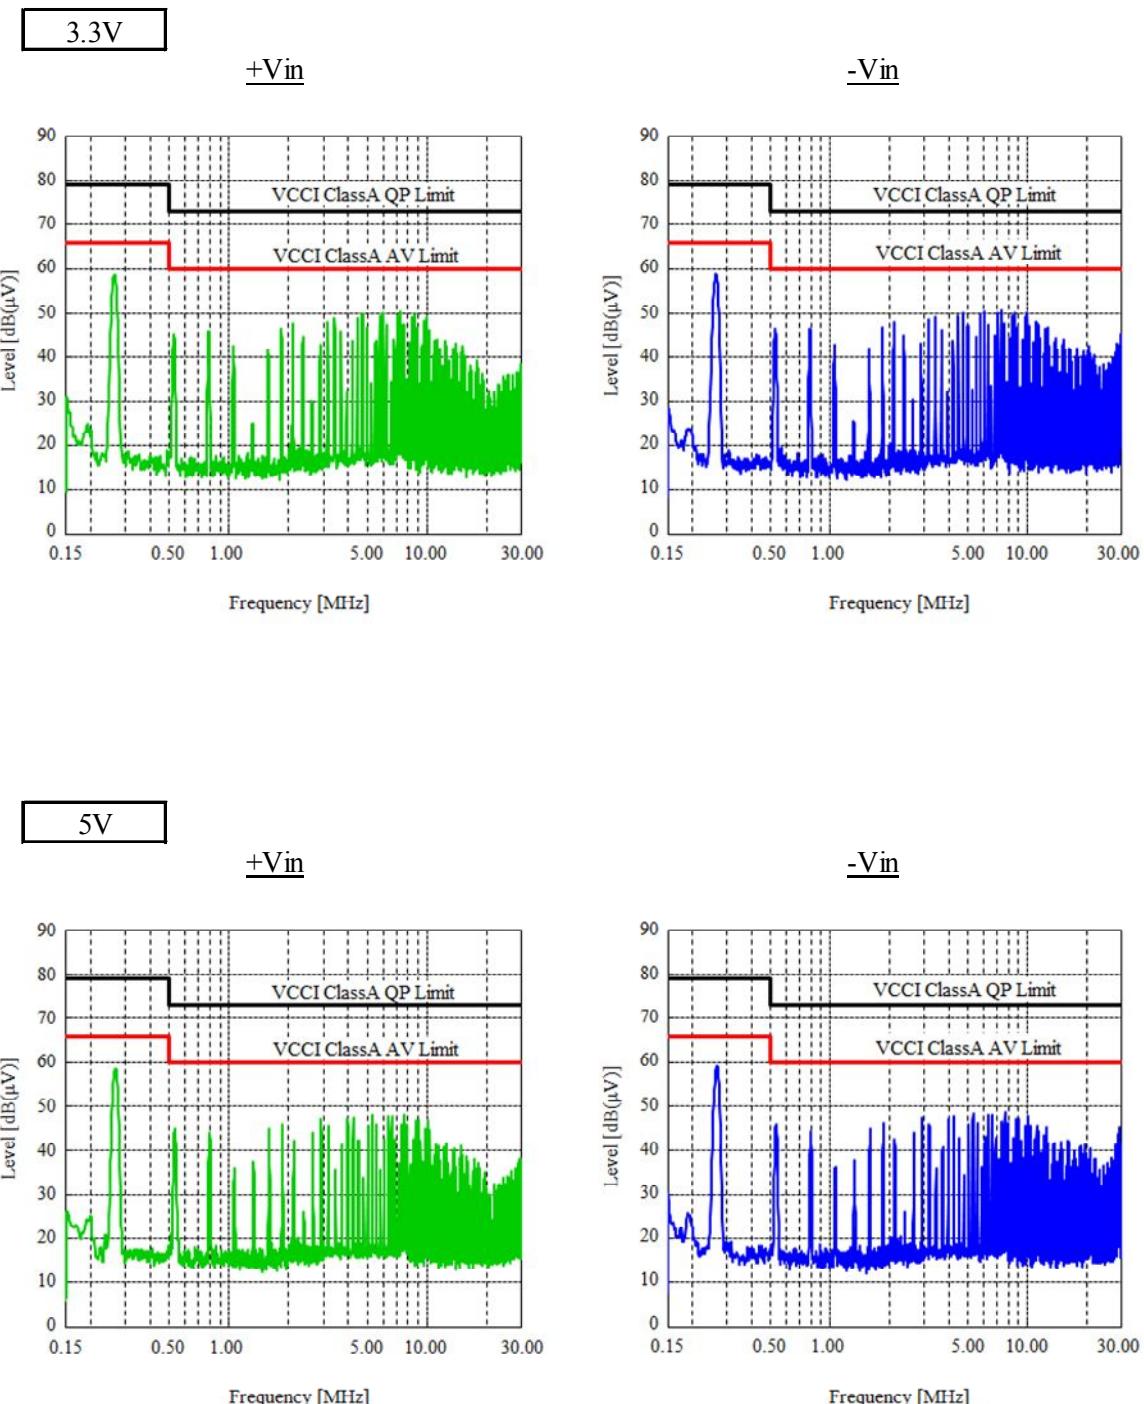


## 2-9. EMI特性 Electro-Magnetic Interference characteristics



(a) 雜音端子電圧 (帰還ノイズ) Conducted Emission Noise

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C

12V

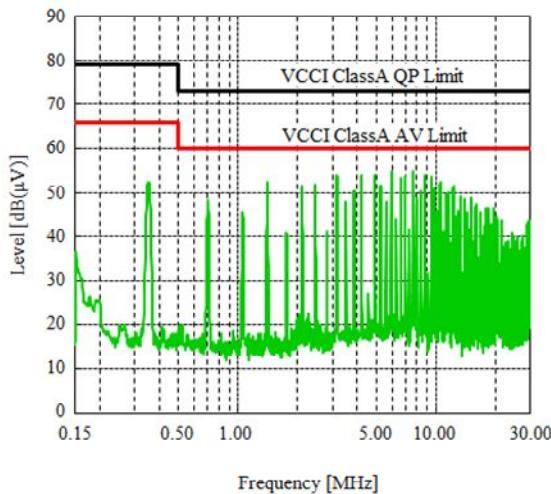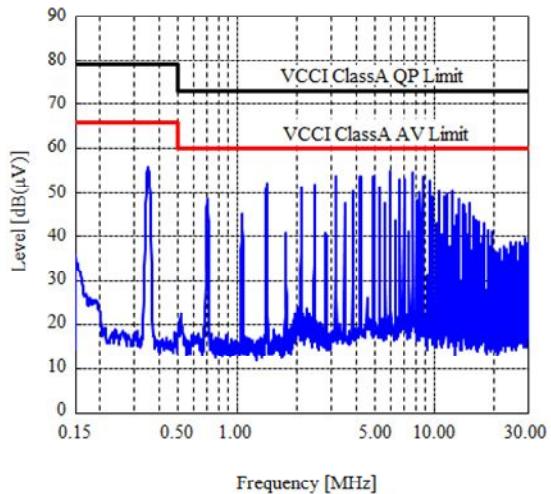+Vin-Vin

15V

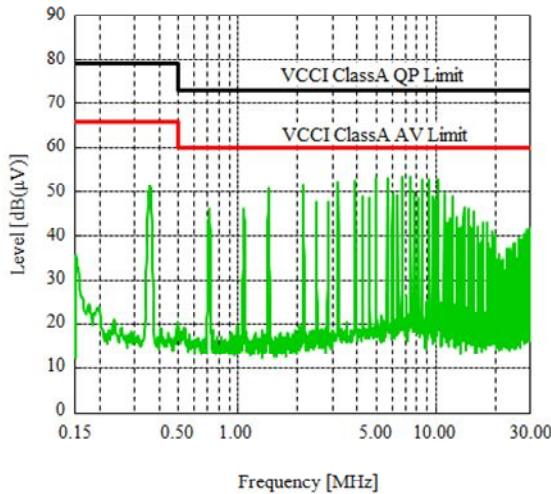
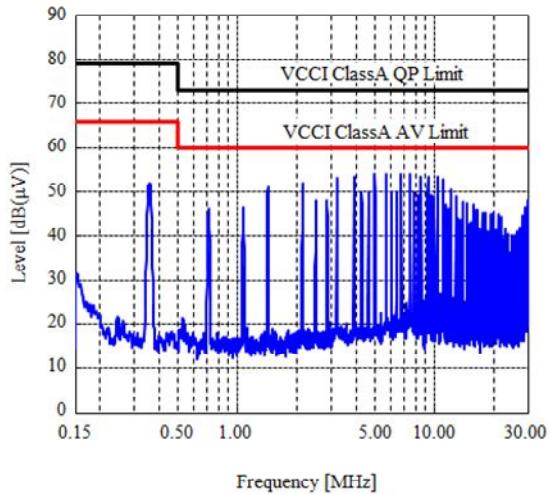
+Vin-Vin

## 2-9. EMI特性 Electro-Magnetic Interference characteristics



(b) 雜音電界強度 (輻射ノイズ) Radiated Emission Noise

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C

3.3V

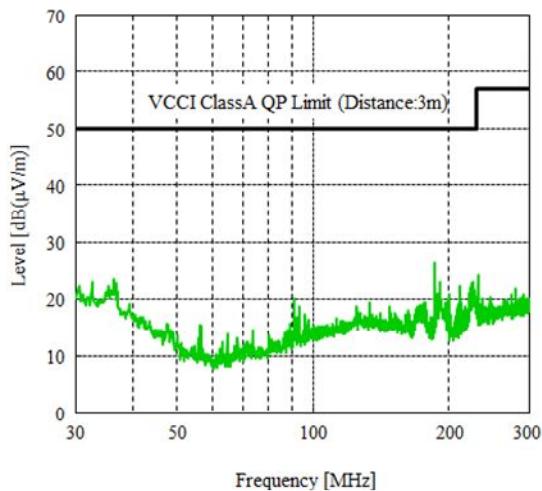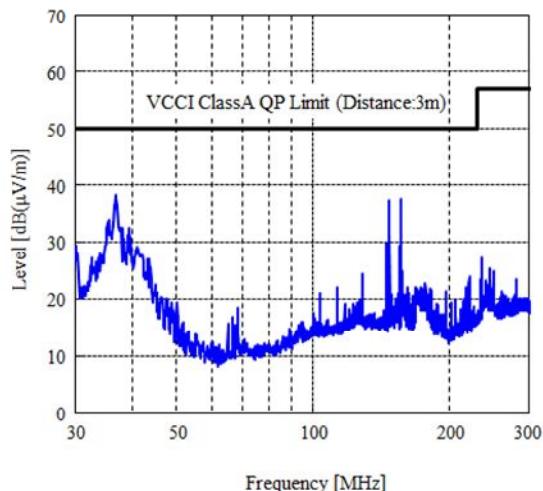HORIZONTALVERTICAL

5V

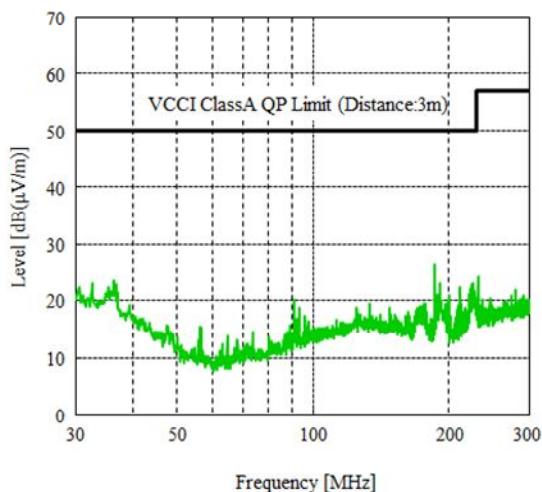
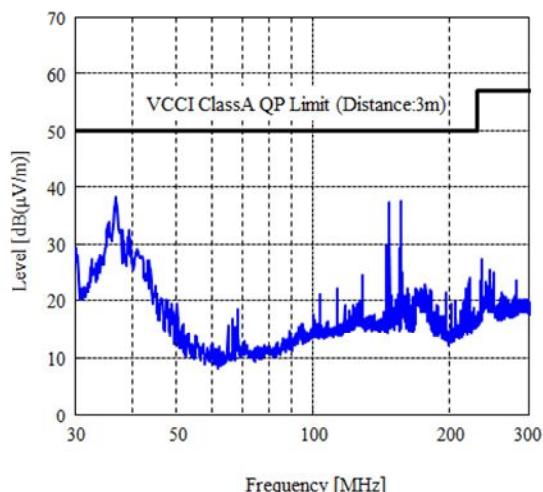
HORIZONTALVERTICAL

## 2-9. EMI特性 Electro-Magnetic Interference characteristics


(b) 雜音電界強度 (輻射ノイズ) Radiated Emission Noise

Conditions Vin : 48 VDC  
 Io : 100 %  
 Ta : 25 °C

12V

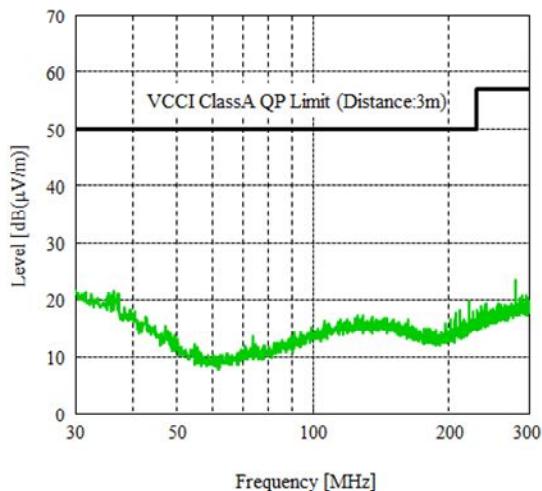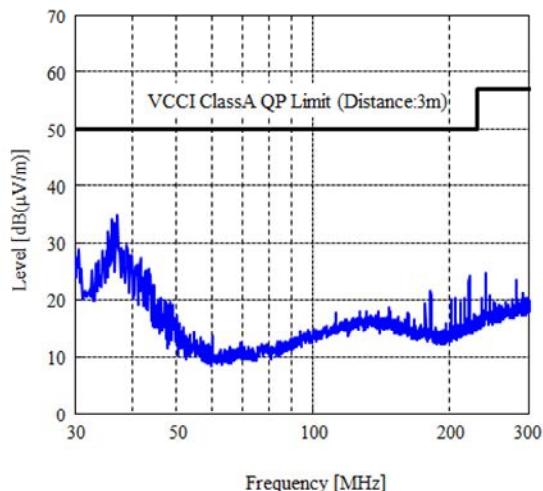HORIZONTALVERTICAL

15V

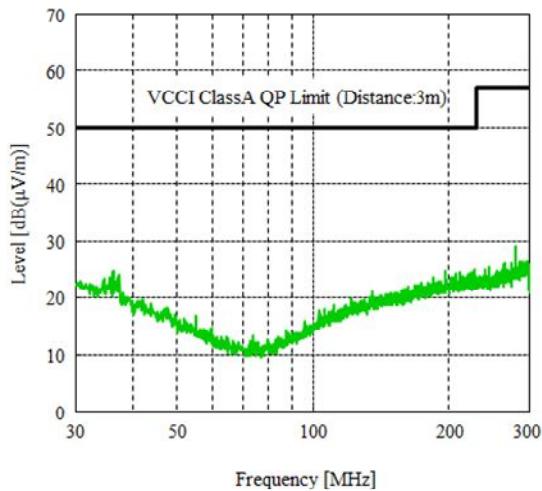HORIZONTALVERTICAL