

# C2012X7R2A472K085AE

TDK Item Description : C2012X7R2A472KT\*\*\*S



## Application & Main Feature

Commercial Grade ( Soft Termination )

## Series

C2012 [EIA CC0805]



## Dimensions

L	2.00mm +0.45,-0.2mm
W	1.25mm +0.25,-0.2mm
T	0.85mm +/-0.15mm
B	0.20mm Min.
G	0.50mm Min.

## Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

## Rated Voltage

2A (100Vdc)

## Capacitance

4.7nF

## Capacitance Tolerance

K (+/-10%)

## Dissipation Factor

3% Max.


## Insulation Resistance

10Gohm Min


## AEC-Q200

Not Applicable


**|Z|, ESR vs. Freq. Characteristics (Simulation Data)**

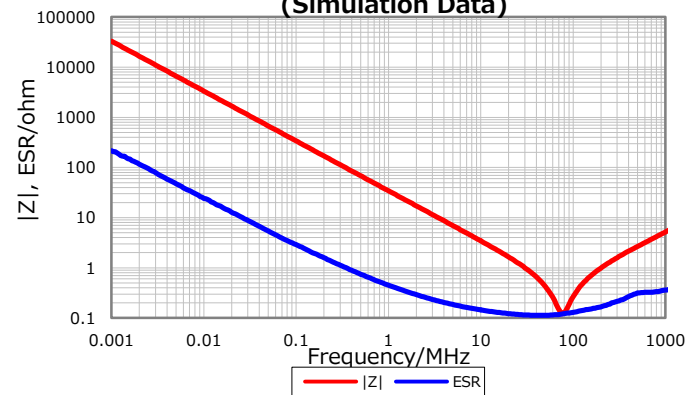


**Cap. vs. Freq. Characteristic**

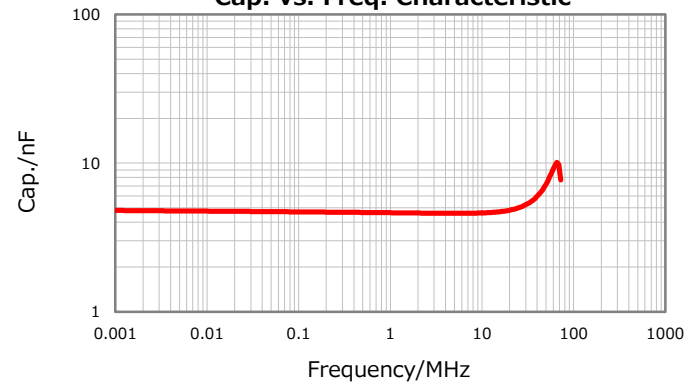


**DC Bias Characteristic**

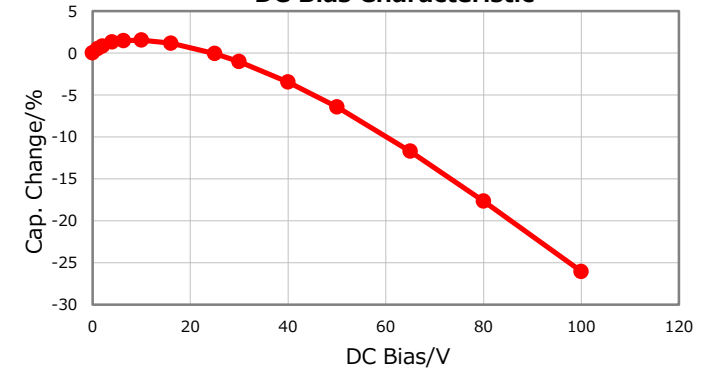

**Temperature Characteristics**

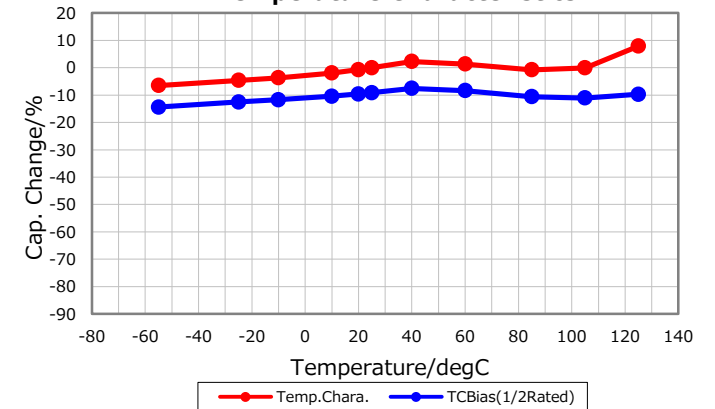

**Ripple Temperature Rise Characteristics**

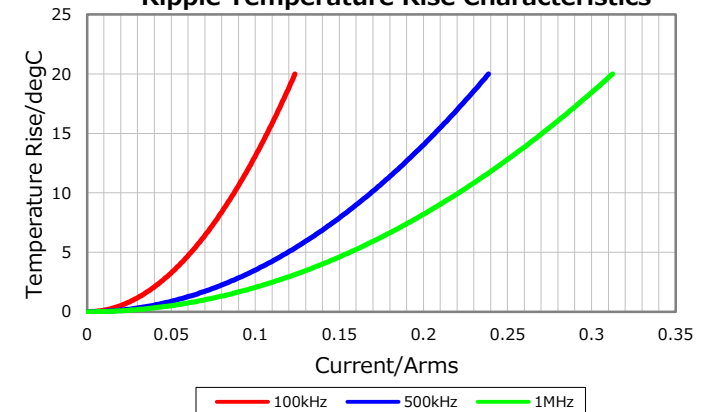

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

March 16, 2017