

**NOTES**

- A: MODEL NAME, OPTION, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B: M4 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (5) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6m/m.
- C:  $\phi 4.5$  HOLES (2) FOR CUSTOMER CHASSIS MOUNTING. (USE M4 MOUNTING SCREWS.)
- D: REMOTE ON/OFF CONTROL CONNECTOR --- OPTION B2B-XH-A (JST)


**ACCESSORIES**

- \* COVER FOR BARRIER STRIP TERMINAL
- \* SHORT PIECE (NET 2) FOR SHORTING PURPOSE (+S~+V, -S~-V): MOUNTED AT TIME OF SHIPMENT.
- \* HOUSING: XHP-2 (JST), TERMINAL: BXH-001T-P0.6 (JST) OR SXH-001T-P0.6 (JST) --- OPTION

HAND CRIMPING TOOL : YC-110R (JST) OR YRS-110 (JST)

**OPTIONAL MODELS**

MODEL	COVER	REMOTE ON/OFF CONTROL
JWS100-*		
JWS100-* [A]	○	
JWS100-* [R]		○
JWS100-* [RA]	○	○

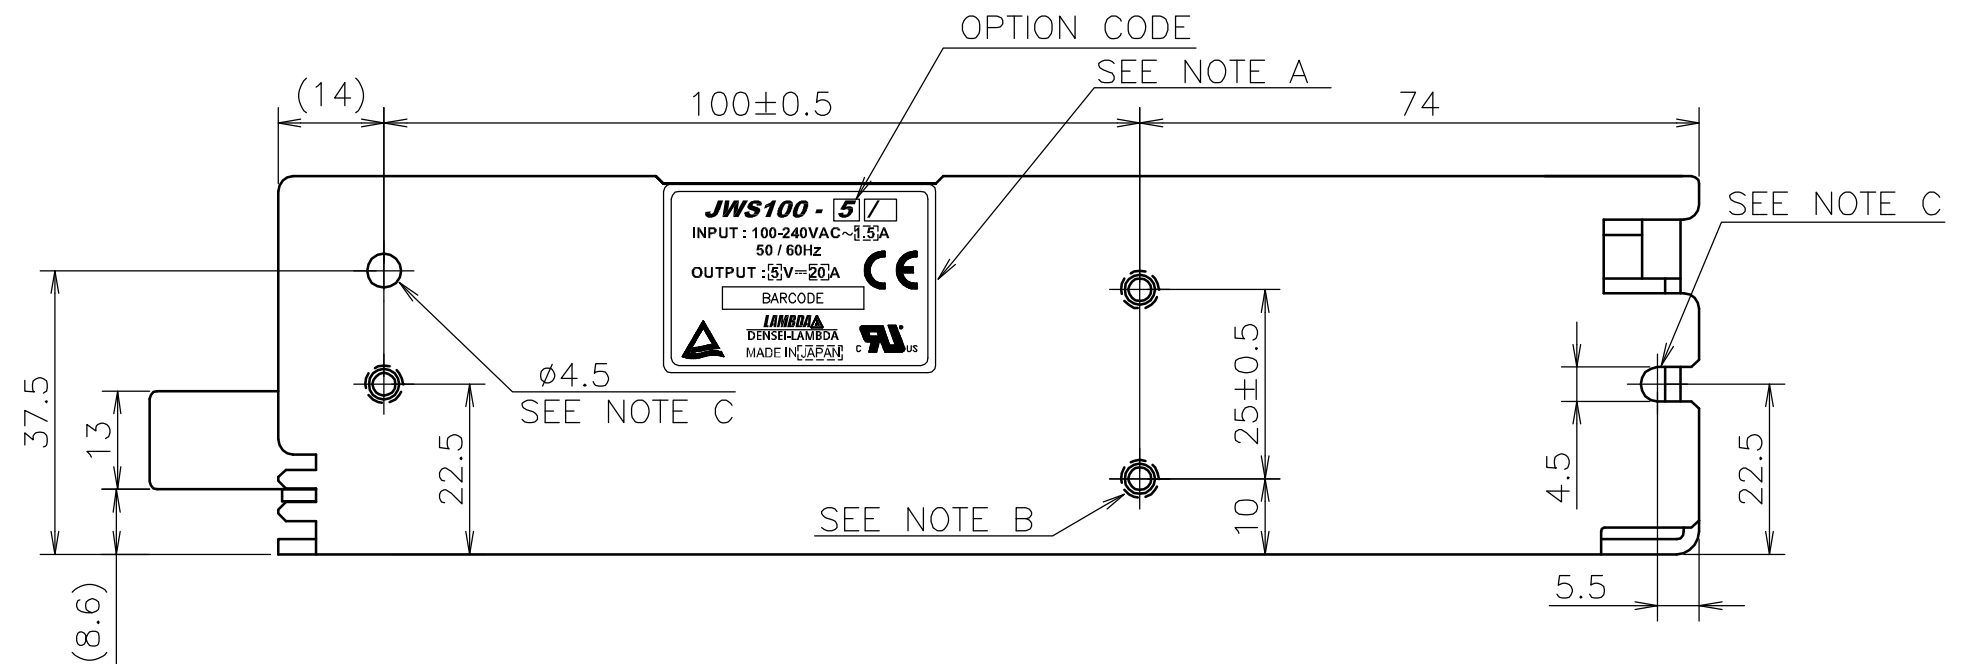

(unit : mm)

MODEL NAME	JWS100 [ ]
<b>TDK-Lambda</b>	

A159-02-01D