


NOTES

- A: MODEL NAME, OPTION, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT AND COUNTRY OF MANUFACTURE ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- B: M4 EMBOSSED, TAPPED AND COUNTERSUNK HOLES (7) FOR CUSTOMER CHASSIS MOUNTING. SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 6mm.
- C: MODEL NAME, NOMINAL OUTPUT VOLTAGE AND MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- D: $\phi 4.5$ HOLES (2) FOR CUSTOMER CHASSIS MOUNTING. (USE M4 MOUNTING SCREWS.)

ACCESSORIES

- * COVER FOR BARRIER STRIP TERMINAL.
- * SHORT PIECE (NET 2) FOR SHORTING PURPOSE (+S~+V, -S~-V): MOUNTED AT TIME OF SHIPMENT.

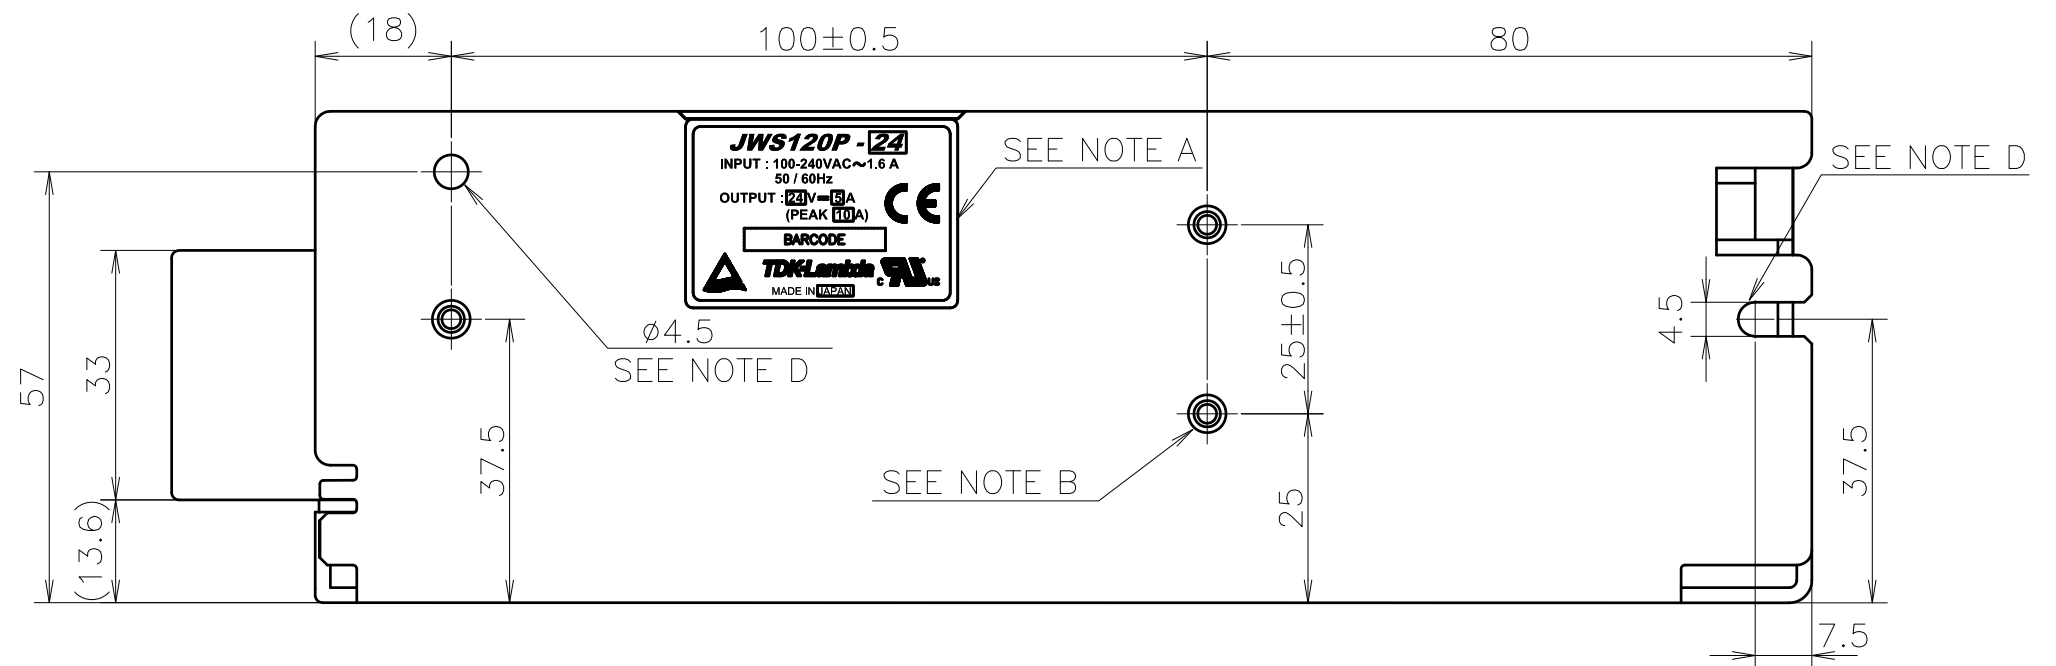

(unit : mm)

MODEL NAME	JWS120P
TDK-Lambda	
A181-02-01E	