

**CUS50E/S1**

**SPECIFICATIONS**


CA821-01-01/S1-B

ITEMS		MODEL	CUS50E -5/S1	CUS50E -12/S1	CUS50E -24/S1
1	Nominal Output Voltage	V	5	12	24
2	Maximum Output Current	A	10.0	4.3	2.1
3	Maximum Output Power	W	50.0	51.6	50.4
4	Efficiency @ DC input (Typ) 110/220VDC (*1)	%	83 / 86	83/86	85/87
	Efficiency @ AC input (Typ) 115/230VAC (*1)	%	83 / 86	83/86	85/87
5	Input Voltage Range	(*) (*12) -	85 ~ 265VAC( 47-440Hz) or 88- 370VDC		
6	Input Current @ DC input (Typ) 110/220VDC (*1)	A	0.6 / 0.3		
	Input Current @ AC input (Typ) 115/230VAC (*1)	A	1.1/0.7		
7	In-rush Current @ DC input (Typ) 110/220VDC (*1) (*3)	-	11A at 110VDC, 22A at 220VDC, Ta=25°C, Cold Start		
	In-rush Current @ AC input (Typ) 115/230VAC (*1) (*3)	-	17A at 115VAC, 39A at 230VAC, Ta=25°C, Cold Start		
8	Adjustable Output Voltage Range	V	4.5 - 5.5	10.8 - 13.2	21.6-26.4
9	Maximum Ripple&Noise (*4) (*5)	0≤Ta<70°C	mV	120	150
		-10≤Ta<0°C	mV	160	180
10	Maximum Line Regulation	(*) (*6) mV	20	48	96
11	Maximum Load Regulation	(*) (*7) mV	40	96	150
12	Temperature Coefficient	(*) (*4) -	Less than 0.02% / °C		
13	Over Current Protection	(*) (*8) A	10.5-	4.51-	2.2-
14	Over Voltage Protection	(*) (*9) V	5.75 - 7.0	13.8-16.2	27.6-32.4
15	Hold-up Time @ DC input (Typ) 110/220VDC (*1)	-	22ms(@90% load)/115ms(@100% load)		
	Hold-up Time @ AC input (Typ) 115/230VAC (*1)	-	50ms(@100% load)/240ms(@100% load)		
16	Leakage Current	(*) (*10) -	less than 0.5mA. 0.2mA(Typ)at 100VAC/0.4mA(Typ) at 230VAC		
17	Remote Control	-	-		
18	Parallel Operation	-	-		
19	Series Operation	-	Possible		
20	Operating Temperature	(*) (*11) -	Convection : -10 - +70°C,start up at -40°C is possible		
21	Operating Humidity	-	10 - 90%RH (No Condensing)		
22	Storage Temperature	-	-40 - +85°C		
23	Storage Humidity	-	10 - 90%RH (No Condensing)		
24	Cooling	-	Convection		
25	Withstand Voltage	-	Input - FG : 2kVAC (10mA), Input - Output : 3kVAC (10mA) Output - FG : 500VAC (20mA) for 1min		
26	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC		
27	Vibration	-	At no operating, 10 - 500Hz (Sweep for 1min) 19.6m/s <sup>2</sup> Constant, X,Y,Z 1hour each.		
28	Shock	-	Less than 196.1m/s <sup>2</sup>		
29	Safety	-	Designed to meet UL60950-1		
30	CE	-	Designed to meet EN55011/EN55032-A, FCC-A, VCCI-A		
31	RE	-	Designed to meet EN55011/EN55032-A, FCC-A, VCCI-A		
32	Immunity	-	Designed to meet IEC61000-4-2 (Level 4), IEC61000-4-3 (Level 3), IEC61000-4-4 (Level 4), IEC61000-4-5 (Level 3, 4),IEC61000-4-6 (Level 3), IEC61000-4-8 (Level 4), IEC61000-4-11		
33	Weight (Typ)	g	175		
34	Size (L x W x H)	mm	132 x 65 x 26 ( Refer to Outline Drawing )		

\*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- \*1. At 115/230VAC & 110/220VDC, Ta=25°C, nominal output voltage and maximum output power.
- \*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 ~ 240VAC(50-60Hz).
- \*3. Not applicable for the in-rush current to noise filter for less than 0.2ms.
- \*4. Please refer to Fig. A for measurement of Vo, line & load regulation and ripple voltage.
- \*5. Ripple & noise are measured at 100MHz by using a 150mm twisted pair of load wires terminated with a 0.1uF and 100uF
- \*6. 85 ~ 265VAC & 88 - 370VDC, constant load.
- \*7. No load-Full load, constant input voltage.
- \*8. Hiccup with automatic recovery.  
Avoid to operate at over load or short circuit condition for more than 30seconds.
- \*9. OVP circuit will shut down output , manual reset (Re power on) to get output voltage.
- \*10. Measured by the each measuring method of UL, CSA and EN (at 60Hz), Ta=25°C.
- \*11. Output derating
  - Derating at standard mounting. Refer To Output Derating Curve for details of output derating versus input voltage and ambient temperature.
  - Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.
  - Start up at -40°C is possible.However, it may not fulfill all the specifications. Please read instruction manual for detail information.
- \*12. Output Derating needed when input voltage less than 120VDC, refer to CA821-01-03/S1\_.

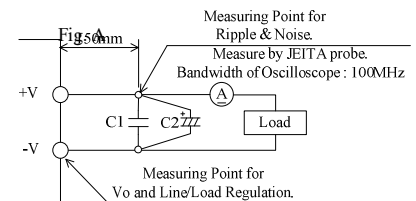

C1 : Film Cap. 0.1 μF  
C2 : Elec. Cap. 100 μF

**CUS50E/S1**

**OUTPUT DERATING**

CA821-01-02/S1

\*COOLING: CONVECTION COOLING


Ta (°C)	LOADING CONDITION(%)
	MOUNTING A,B,C
-10 - +50	100
60	75
70	50

\*COOLING: FORCED AIR COOLING



Ta (°C)	LOADING CONDITION(%)
	MOUNTING A,B,C
-10 - +60	100
70	70

Air Velocity  $\geq 0.7\text{m/s}$ : Air must flow through component side.

\*COOLING: CONVECTION COOLING

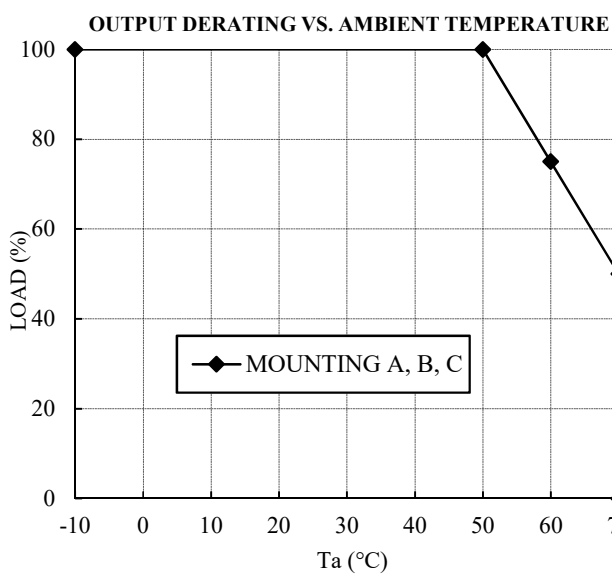

\*COOLING: FORCED AIR COOLING

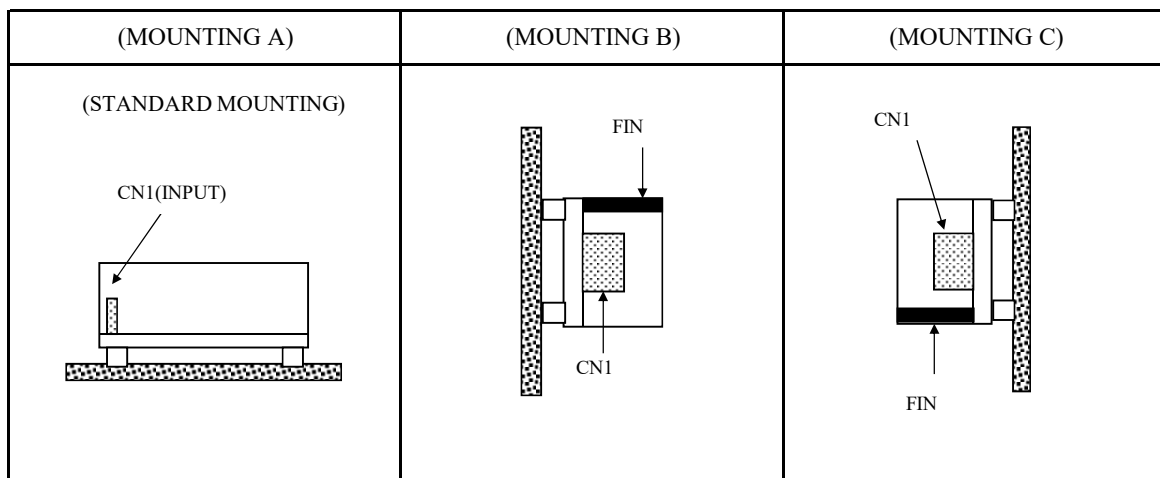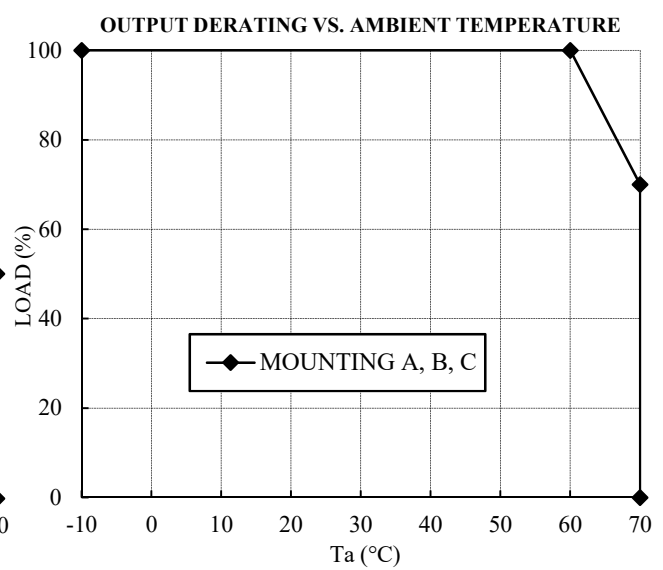

**CUS50E/S1**

**OUTPUT DERATING**

CA821-01-03/S1

INPUT VOLTAGE	LOADING CONDITION(%)
	MOUNTING A,B,C
85VAC	90
90VAC - 265VAC	100

INPUT VOLTAGE	LOADING CONDITION(%)
	MOUNTING A,B,C
88VDC	70
110VDC	90
120VDC - 370VDC	100

