

SWS150

RELIABILITY DATA

| DWG No. CA732-57-01 | | | |
|---|------------------|----------------------|------------------|
| QA APPD | APPD | CHK | DWG |
|  | Joe 23-May-03 | Jackson 21-May-03 | Joe 21-May-03 |

I N D E X

| | PAGE |
|---|-------------|
| 1. Calculated Values of MTBF | R-1 |
| 2. Component Derating | R-2 |
| 3. Main Components Temperature Rise ΔT List | R-5 |
| 4. Electrolytic Capacitor Life | R-7 |
| 5. Vibration Test | R-10 |
| 6. Noise Simulate Test | R-11 |

※ The above data is typical value. As all units have nearly the same characteristics, the data to be considered as ability value.

1. CALCULATED VALUES OF MTBF**MODEL : SWS150-5****(1) Calculating method**

Calculated based on part count reliability projection of JEITA (RCR-9102).

Individual failure rates λ_G is given to each part and MTBF is calculated by the count of each part.

<Formula> :

$$MTBF = \frac{1}{\lambda_{equip}} = \frac{1}{\sum_{i=1}^n N_i (\lambda_G \pi_Q)_i} \times 10^6 \text{ (Hours)}$$

λ_{equip} : Total Equipment Failure Rate (Failure/ 10^6 Hours)

λ_G : Generic Failure Rate for The ith Generic Part (Failure/ 10^6 Hours)

N_i : Quantity of ith Generic Part

n : Number of Different Generic Part Categories

π_Q : Generic Quality Factor for The ith Generic Part ($\pi_Q = 1$)

(2) MTBF Values

G_F : (Ground , Fixed)

MTBF ≈ 420,582(Hours)

2. COMPONENT DERATING

MODEL : SWS150-5

(1) Calculating Method

(a) Measuring Conditions

| | | | |
|--------|----------------|-----------------------|---------------------|
| Input | : 100/200VAC | • Ambient temperature | : 45°C |
| Output | : 5V 20A(100%) | • Mounting method | : Standard Mounting |

(b) Semiconductors

Compared with maximum junction temperature and actual one which is calculated based on case temperature, power dissipation and thermal impedance.

(c) IC, Resistors, Capacitors, etc.

Ambient temperature, operating condition, power dissipation and so on are within derating criteria.

(d) Calculating Method of Thermal Impedance

$$\theta_{j-c} = \frac{T_{j(max)} - T_c}{P_{c(max)}} \quad \theta_{j-a} = \frac{T_{j(max)} - T_a}{P_{c(max)}} \quad \theta_{j-l} = \frac{T_{j(max)} - T_l}{P_{c(max)}}$$

T_c : Case Temperature at Start Point of Derating ; 25°C in General

T_a : Ambient Temperature at Start Point of Derating ; 25°C in General

T_l : Lead Temperature at Start Point of Derating ; 25°C in General

$P_{c(max)}$
($P_{ch(max)}$) : Maximum Collector(channel) Dissipation

$T_{j(max)}$
($T_{ch(max)}$) : Maximum Junction(channel) Temperature

θ_{j-c}
(θ_{ch-c}) : Thermal Impedance between Junction(channel) and Case

θ_{j-a} : Thermal Impedance between Junction and Air

θ_{j-l} : Thermal Impedance between Junction and Lead

(2) Component Derating List

| Location No. | Vin = 100VAC Load = 100% Ta = 25°C (Convection cooling) | |
|---|--|--|
| Q1 2SK2837 TOSHIBA | Tchmax = 150 °C, Peh = 6.68W, Tch = Tc + ((θ ch-c) × Pch) = 85.0 °C D.F. = 56.7% | θ ch-c = 0.83 °C/W, Δ Tc = 54.5 °C, Pch(max) = 150 W, Tc = 79.5 °C |
| Q2 2SK2611 TOSHIBA | Tchmax = 150 °C, Pch = 8.30W, Tch = Tc + ((θ ch-c) × Pch) = 96.7 °C D.F. = 64.5% | θ ch-c = 0.83 °C/W, Δ Tc = 64.8 °C, Pch(max) = 150 W, Tc = 89.8 °C |
| Q102 2SK2177-4061 SHINDENGEN | Tjmax = 150 °C, Pch = 0.03W, Tch = Tc + ((θ ch-c) × Pch) = 82.3 °C D.F. = 54.9% | θ ch-c = 12.50 °C/W, Δ Tc = 56.9 °C, Pch(max) = 10 W, Tc = 81.9 °C |
| D1 D3SB60 SHINDENGEN | Tjmax = 150 °C, Pd = 3.5 W, Tj = Tc + ((θ j-c) × Pd) = 124.7 °C D.F. = 83.1% | θ j-c = 5.5 °C/W, Δ Tc = 80.4 °C, Tc = 105.4 °C |
| D2 YG911S3R FUJI-ELE | Tjmax = 150 °C, Pd = 1.56 W, Tj = Tc + ((θ j-c) × Pd) = 103.4 °C D.F. = 68.9% | θ j-c = 3.50 °C/W, Δ Tc = 72.9 °C, Tc = 97.9 °C |
| D51 S30SC4M SHINDENGEN | Tjmax = 150 °C, Pd = 8.25 W, Tj = Tc + ((θ j-c) × Pd) = 109.0 °C D.F. = 72.7% | θ j-c = 1.0 °C/W, Δ Tc = 70.0 °C, Tc = 95 °C |
| A101 FA5502M-TE1 FUJI-ELE | Tjmax = 150 °C, Pd = 0.09W, Tj = Tc + ((θ j-c) × Pd) = 106.3 °C D.F. = 70.9% | θ j-c = 50.00 °C/W, Δ Tc = 76.8 °C, Tc = 101.8 °C |
| A102 M51995AFP-600C MITSUBISHI | Tjmax = 150 °C, Pd = 0.35 W, Tj = Ta + ((θ j-c) × Pd) = 123.9 °C D.F. = 82.6% | θ j-c = 40 °C/W, Δ Tc = 84.9°C, Tc = 109.9 °C |
| A201 UPC1093T-E1 NEC | Tjmax = 150 °C, Pd = 0.03W, Tj = Ta + ((θ j-a) × Pd) = 94.2°C D.F. = 62.8% | θ j-a = 315 °C/W, Δ Ta = 59.7°C, Ta = 84.7°C |
| PC1 TLP721F (D4-GR,M) (LED) TOSHIBA | Tjmax = 150 °C, If = 0 mA, ALLOWABLE If(max) = 29mA (at Ta = 84.2°C) D.F. = 0 % | Δ If/°C = -0.7mA /°C, Δ Ta = 59.2 °C, I _f (max)=60mA, Ta= 84.2°C |
| PC1 TLP721F (D4-GR,M) (Transistor) TOSHIBA | Tjmax = 150 °C, Pd = 0 W, Tj = Ta + ((θ j-a) × Pd) = 84.2 °C D.F. = 56.1 % | θ j-a = 667°C/W, Δ Ta = 59.2 °C, Pc(max) = 150 mW, Ta= 84.2 °C |
| PC2 TLP721F (D4-GR,M) (LED) TOSHIBA | Tjmax = 150 °C, If = 1.2 mA, ALLOWABLE If(max) = 29mA (at Ta = 84.4°C) D.F. = 4.1 % | Δ If/°C = -0.7mA /°C, Δ Ta = 59.4 °C, I _f (max)=60mA, Ta= 84.4°C |
| PC2 TLP721F (D4-GR,M) (Transistor) TOSHIBA | Tjmax = 150 °C, Pd = 25 mW, Tj = Ta + ((θ j-a) × Pd) = 101.1 °C D.F. = 67.4 % | θ j-a = 667°C/W, Δ Ta = 59.4 °C, Pc(max) = 150 mW, Ta= 84.4 °C |

| Location No. | $V_{in} = 200VAC$ | Load = 100% | $T_a = 25^\circ C$ | (Convection cooling) |
|---|--|--|---|-----------------------|
| Q1 2SK2837 TOSHIBA | $T_{chmax} = 150^\circ C$, $P_{ch} = 2.27W$, $T_{ch} = T_c + ((\theta_{ch-c}) \times P_{ch}) = 72.9^\circ C$ D.F. = 48.5% | $\theta_{ch-c} = 0.83^\circ C/W$, $\Delta T_c = 45.8^\circ C$, | $P_{ch(max)} = 150 W$, $T_c = 70.8^\circ C$ | |
| Q2 2S2611 TOSHIBA | $T_{chmax} = 150^\circ C$, $P_{ch} = 8.30W$, $T_{ch} = T_c + ((\theta_{ch-c}) \times P_{ch}) = 91.7^\circ C$ D.F. = 61.1% | $\theta_{ch-c} = 0.83^\circ C/W$, $\Delta T_c = 61.2^\circ C$, | $P_{ch(max)} = 150 W$, $T_c = 86.2^\circ C$ | |
| Q102 2SK2177-4061 SHINDENGEN | $T_{jmax} = 150^\circ C$, $P_{ch} = 0.03W$, $T_{ch} = T_c + ((\theta_{ch-c}) \times P_{ch}) = 71.4^\circ C$ D.F. = 47.6% | $\theta_{ch-c} = 12.50^\circ C/W$, $\Delta T_c = 46.0^\circ C$, | $P_{ch(max)} = 10 W$, $T_c = 71^\circ C$ | |
| D1 D3SB60 SHINDENGEN | $T_{jmax} = 150^\circ C$, $P_d = 1.7 W$, $T_j = T_c + ((\theta_{j-c}) \times P_d) = 86.3^\circ C$ D.F. = 57.5% | $\theta_{j-c} = 5.5^\circ C/W$, $\Delta T_c = 51.9^\circ C$, | | $T_c = 76.9^\circ C$ |
| D2 Y9G11S3R FUJI-ELE | $T_{jmax} = 150^\circ C$, $P_d = 0.96 W$, $T_j = T_c + ((\theta_{j-c}) \times P_d) = 92.2^\circ C$ D.F. = 61.5% | $\theta_{j-c} = 3.50^\circ C/W$, $\Delta T_c = 63.8^\circ C$, | | $T_c = 88.8^\circ C$ |
| D51 S30SC4M SHINDENGEN | $T_{jmax} = 150^\circ C$, $P_d = 8.25 W$, $T_j = T_c + ((\theta_{j-c}) \times P_d) = 100.8^\circ C$ D.F. = 67.2% | $\theta_{j-c} = 1.0^\circ C/W$, $\Delta T_c = 67.5^\circ C$, | | $T_c = 92.5^\circ C$ |
| A101 FA5502M-TE1 FUJI-ELE | $T_{jmax} = 150^\circ C$, $P_d = 0.09W$, $T_j = T_a + ((\theta_{j-c}) \times P_d) = 100.5^\circ C$ D.F. = 67.0% | $\theta_{j-c} = 50.00^\circ C/W$, $\Delta T_c = 71.0^\circ C$, | | $T_c = 96^\circ C$ |
| A102 M51995AFP-600C MITSUBISHI | $T_{jmax} = 150^\circ C$, $P_d = 0.35 W$, $T_j = T_a + ((\theta_{j-c}) \times P_d) = 120.7^\circ C$ D.F. = 80.5% | $\theta_{j-c} = 40^\circ C/W$, $\Delta T_c = 81.7^\circ C$, | | $T_c = 106.7^\circ C$ |
| A201 UPC1093T-E1 NEC | $T_{jmax} = 150^\circ C$, $P_d = 0.03W$, $T_j = T_a + ((\theta_{j-a}) \times P_d) = 93.6^\circ C$ D.F. = 62.4% | $\theta_{j-a} = 315^\circ C/W$, $\Delta T_a = 59.1^\circ C$, | | $T_a = 84.1^\circ C$ |
| PC1 TLP721F (D4-GR,M) (LED) TOSHIBA | $T_{jmax} = 150^\circ C$, $I_f = 0 mA$, ALLOWABLE $I_f(max) = 34mA$ (at $T_a = 77.1^\circ C$) D.F. = 0 % | $\Delta I_f / ^\circ C = -0.7mA / ^\circ C$, $\Delta T_a = 52.1^\circ C$, | $I_f(max)=60mA$, $T_a= 77.1^\circ C$ | |
| PC1 TLP721F (D4-GR,M) (Transistor) TOSHIBA | $T_{jmax} = 150^\circ C$, $P_d = 0 W$, $T_j = T_a + ((\theta_{j-a}) \times P_d) = 77.1^\circ C$ D.F. = 51.4% | $\theta_{j-a} = 667^\circ C/W$, $\Delta T_a = 52.1^\circ C$, | $Pc(max) = 150 mW$, $T_a= 77.1^\circ C$ | |
| PC2 TLP721F (D4-GR,M) (LED) TOSHIBA | $T_{jmax} = 150^\circ C$, $I_f = 1.2 mA$, ALLOWABLE $I_f(max) = 34mA$ (at $T_a = 77.7^\circ C$) D.F. = 3.5 % | $\Delta I_f / ^\circ C = -0.7mA / ^\circ C$, $\Delta T_a = 52.7^\circ C$, | $I_f(max)=60mA$, $T_a= 77.7^\circ C$ | |
| PC2 TLP721F (D4-GR,M) (Transistor) TOSHIBA | $T_{jmax} = 150^\circ C$, $P_d = 25 mW$, $T_j = T_a + ((\theta_{j-a}) \times P_d) = 94.4^\circ C$ D.F. = 62.9% | $\theta_{j-a} = 667^\circ C/W$, $\Delta T_a = 52.7^\circ C$, | $Pc(max) = 150 mW$, $T_a= 77.7^\circ C$ | |

3. MAIN COMPONENTS TEMPERATURE RISE ΔT LIST






MODEL : SWS150-5

Measuring Conditions (Convection cooling)

| | (A) | (B) | (C) | DON'T USE | DON'T USE |
|---|-----|-----|-----|-----------|-----------------|
| Mounting Method (Standard Mounting Method:(A)) | | | | | |
| Input Voltage (VAC) | 100 | | | | |
| Output Voltage (VDC) | 5 | | | | NOT RECOMMENDED |
| Output Current (A) | 30 | | | | |

| | | ΔT Temperature rise (°C) | | |
|---------------------|--------------|--------------------------|-------------------|-------------------|
| Output Derating (%) | | 100 (Ta =25°C) | 100 (Ta =15°C) | 100 (Ta =15°C) |
| Location No. | Parts Name | Mounting A | Mounting B | Mounting C |
| L1 | BALUN COIL | 48.2 | 63.1 | 73.1 |
| L51 | CHOKE COIL | 88.6 | 96.0 | 94.3 |
| T1 | TRANS PULSE | 86.4 | 99.0 | 85.6 |
| A101 | CHIP IC | 76.8 | 81.3 | 74.8 |
| A102 | CHIP IC | 84.9 | 83.7 | 76.3 |
| D1 | BRIDGE DIODE | 80.4 | 94.8 | 94.6 |
| Q1 | MOS-FET | 54.5 | 57.8 | 55.9 |
| Q2 | MOS-FET | 64.8 | 67.2 | 65.6 |
| D51 | OUTPUT DIODE | 70.0 | 65.4 | 72.8 |
| C5 | E. CAP. | 56.6 | 73.0 | 75.2 |
| C6 | E. CAP. | 40.0 | 56.6 | 39.2 |
| C7 | E. CAP. | 60.9 | 64.9 | 56.3 |
| C51 | E. CAP. | 70.7 | 71.5 | 89.3 |


Measuring Conditions (Convection cooling)
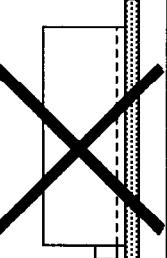
| | (A) | (B) | (C) | DON'T USE | DON'T USE |
|---|---|---|---|---|---|
| Mounting Method (Standard Mounting Method:(A)) |  |  |  |  |  |
| Input Voltage (VAC) | 200 | | | | |
| Output Voltage (VDC) | 5 | | | | NOT RECOMMENDED |
| Output Current (A) | 30 | | | | |

| | | ΔT Temperature rise (°C) | | |
|---------------------|--------------|----------------------------------|-------------------|-------------------|
| Output Derating (%) | | 100 (Ta =25°C) | 100 (Ta =15°C) | 100 (Ta =15°C) |
| Location No. | Parts Name | Mounting A | Mounting B | Mounting C |
| L1 | BALUN COIL | 31.0 | 42.9 | 51.3 |
| L51 | CHOKE COIL | 86.5 | 94.1 | 91.8 |
| T1 | TRANS PULSE | 81.6 | 94.3 | 82.8 |
| A101 | CHIP IC | 71.0 | 80.5 | 74.8 |
| A102 | CHIP IC | 81.7 | 85.9 | 78.9 |
| D1 | BRIDGE DIODE | 51.9 | 64.5 | 66.6 |
| Q1 | MOS-FET | 45.8 | 47.9 | 49.1 |
| Q2 | MOS-FET | 61.2 | 62.7 | 63.7 |
| D51 | OUTPUT DIODE | 67.5 | 64.1 | 71.3 |
| C5 | E. CAP. | 41.1 | 55.8 | 58.4 |
| C6 | E. CAP. | 32.4 | 45.2 | 34.2 |
| C7 | E. CAP. | 57.2 | 62.2 | 57.1 |
| C51 | E. CAP. | 69.1 | 67.7 | 89.1 |


4. ELECTROLYTIC CAPACITOR LIFETIME

MODEL: SWS150-5

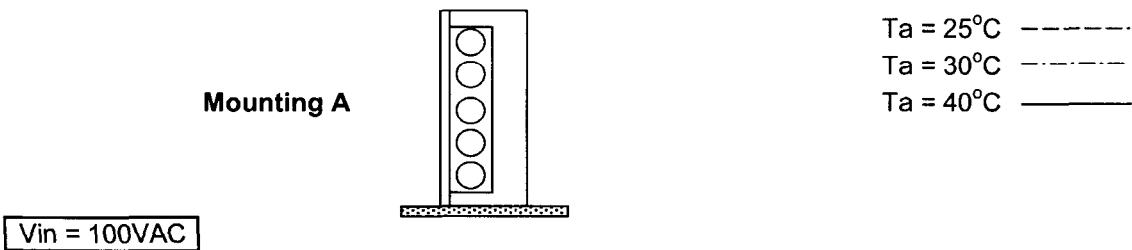

| Load (%) | Life Time (years) | | | |
|----------|-------------------|-----------|-----------|-----------|
| | Ta = 25°C | Ta = 30°C | Ta = 40°C | Ta = 50°C |
| 60 | 8.6 | 6.1 | 3.0 | 1.5 |
| 85 | 5.0 | 3.6 | 1.8 | --- |
| 100 | 4.1 | --- | --- | --- |


Ta = 25°C -----
 Ta = 30°C -----
 Ta = 40°C —————

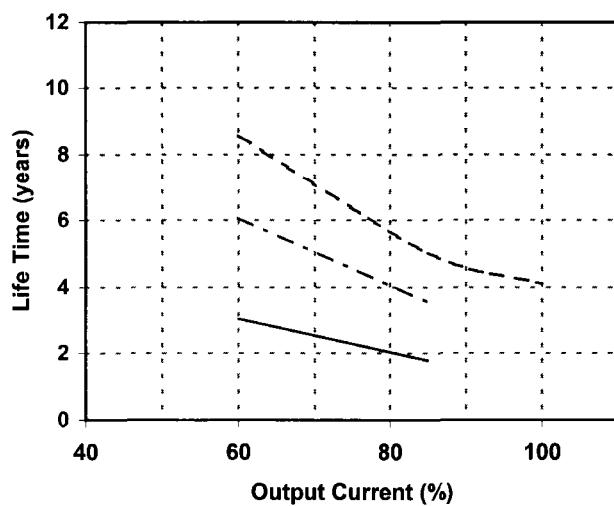

Vin = 200VAC

※ Convection cooling .

| Load (%) | Life Time (years) | | | |
|----------|-------------------|-----------|-----------|-----------|
| | Ta = 25°C | Ta = 30°C | Ta = 40°C | Ta = 50°C |
| 60 | 11.6 | 8.2 | 4.1 | 2.1 |
| 85 | 7.8 | 5.5 | 2.8 | --- |
| 100 | 7.0 | --- | --- | --- |

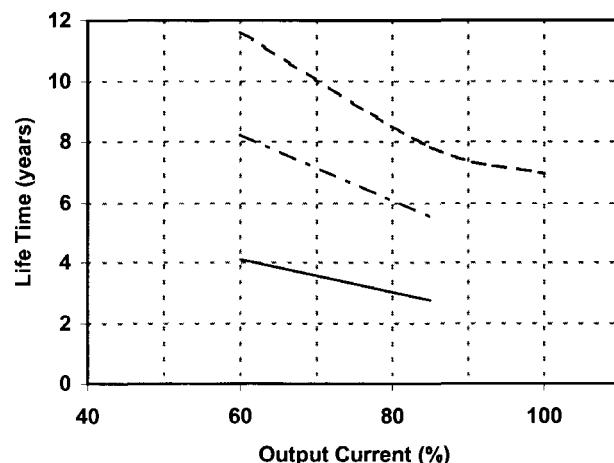

Formula:

1. For 105°C Elect. capacitor

$$L = L_0 \cdot 2^{(105-\Delta T-T_a)/10} / (8 * 365) \text{ (years)}$$

2. For 85°C Elect. capacitor

$$L = L_0 \cdot 2^{(85-\Delta T-T_a)/10} / (8 * 365) \text{ (years)}$$

Where:


L —— Elec. Capacitor computed life (8 hours per day , 365 days operation)

Lo —— Guarantee life for Elec. capacitor

Ta —— Ambient temperature

 ΔT —— Temperature rise of Elec. capacitor


MODEL: SWS150-5

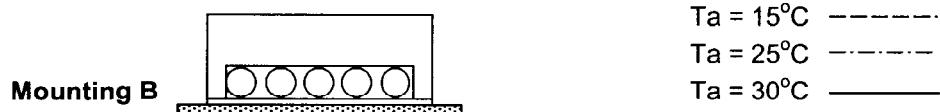

Vin = 100VAC

※ Convection cooling .


| Load (%) | Life Time (years) | | | |
|----------|-------------------|-----------|-----------|-----------|
| | Ta = 15°C | Ta = 25°C | Ta = 30°C | Ta = 45°C |
| 60 | 8.9 | 4.5 | 3.2 | 1.1 |
| 85 | 4.3 | 2.2 | 1.5 | --- |
| 100 | 2.6 | --- | --- | --- |

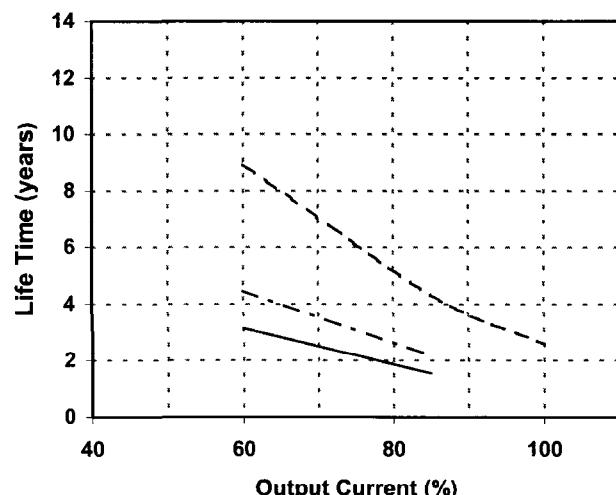

Vin = 200VAC

※ Convection cooling .

| Load (%) | Life Time (years) | | | |
|----------|-------------------|-----------|-----------|-----------|
| | Ta = 15°C | Ta = 25°C | Ta = 30°C | Ta = 45°C |
| 60 | 12.6 | 6.3 | 4.5 | 1.6 |
| 85 | 7.1 | 3.5 | 2.5 | --- |
| 100 | 5.7 | --- | --- | --- |

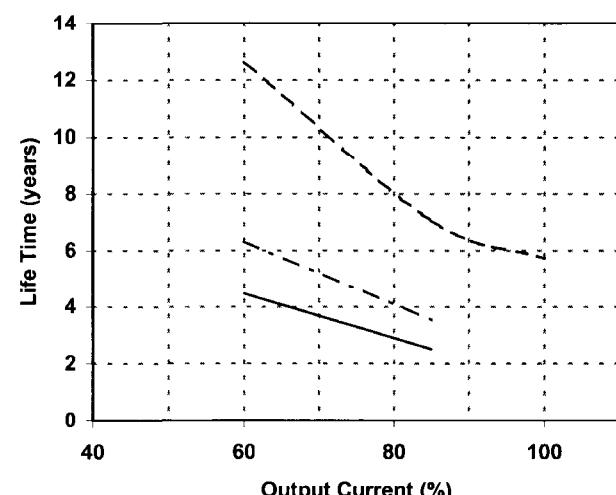

Formula:

1. For 105°C Elec. capacitor

$$L = L_0 \cdot 2^{(105-\Delta T-T_a)/10} / (8 * 365) \text{ (years)}$$

2. For 85°C Elec. capacitor

$$L = L_0 \cdot 2^{(85-\Delta T-T_a)/10} / (8 * 365) \text{ (years)}$$

Where:


L —— Elec. Capacitor computed life (8 hours per day , 365 days operation)

Lo —— Guarantee life for Elec. capacitor

Ta —— Ambient temperature

ΔT —— Temperature rise of Elec. capacitor

MODEL: SWS150-5

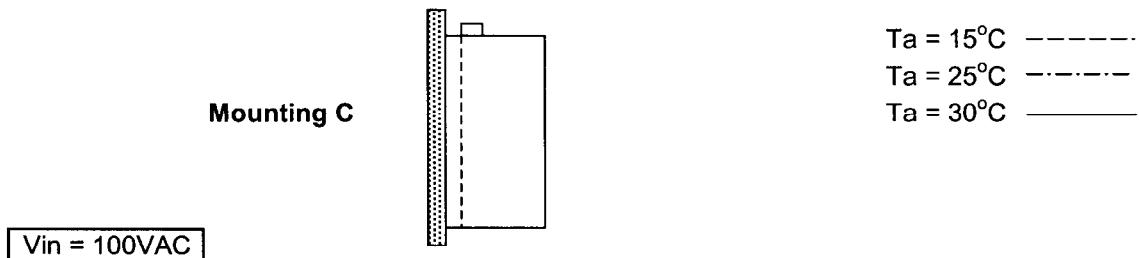


Vin = 100VAC

※ Convection cooling .

| Load (%) | Life Time (years) | | | |
|----------|-------------------|-----------|-----------|-----------|
| | Ta = 15°C | Ta = 25°C | Ta = 30°C | Ta = 45°C |
| 60 | 20.5 | 10.3 | 7.3 | 2.6 |
| 85 | 11.7 | 5.9 | 4.1 | --- |
| 100 | 8.7 | --- | --- | --- |


Ta = 15°C -----
 Ta = 25°C - - - - -
 Ta = 30°C —————

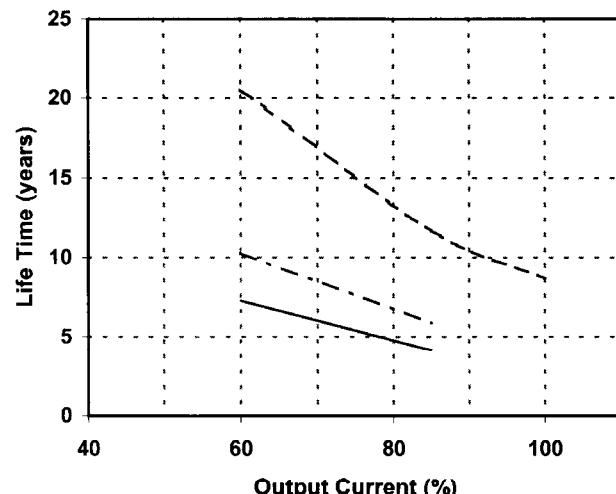

Vin = 200VAC

※ Convection cooling .

| Load (%) | Life Time (years) | | | |
|----------|-------------------|-----------|-----------|-----------|
| | Ta = 15°C | Ta = 25°C | Ta = 30°C | Ta = 45°C |
| 60 | 25.1 | 12.5 | 8.9 | 3.1 |
| 85 | 17.5 | 8.7 | 6.2 | --- |
| 100 | 12.3 | --- | --- | --- |

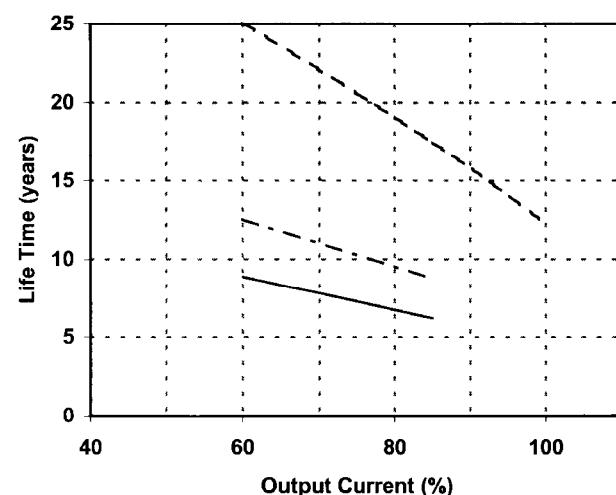

Formula:

1. For 105°C Elec. capacitor

$$L = L_0 * 2^{(105-\Delta T-T_a)/10} / (8 * 365) \text{ (years)}$$

2. For 85°C Elec. capacitor

$$L = L_0 * 2^{(85-\Delta T-T_a)/10} / (8 * 365) \text{ (years)}$$

Where:

L —— Elec. Capacitor computed life (8 hours per day , 365 days operation)

Lo —— Guarantee life for Elec. capacitor

Ta —— Ambient temperature

ΔT —— Temperature rise of Elec. capacitor

5. VIBRATION TEST

MODEL : SWS150-12

(1) Vibration Test Class

Frequency Variable Endurance Test


(2) Equipment Used

- Controller : DP550 (DP CORP. USA)
- Vibrator : V870 (LDS CORP. UK)

(3) Test Conditions

- Sweep frequency 10 ~ 55Hz
- Sweep time 1.0 min.
- Acceleration Constant 19.6m/s^2 (2G)
- Direction X, Y, Z.
- Test time 1 hour each

(4) Test Method

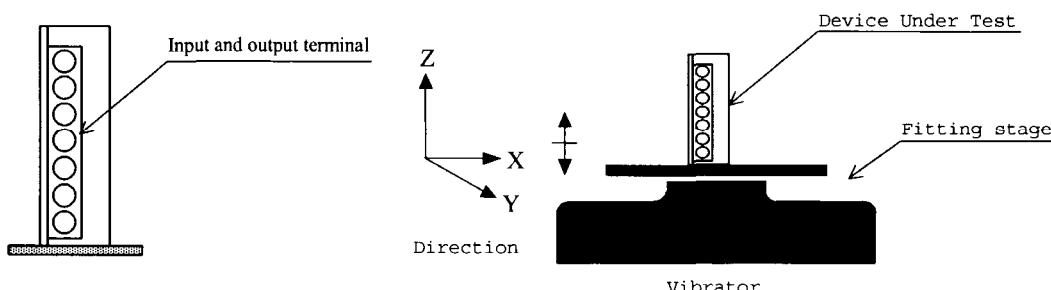

(5) Test Results

O K

Vin : 200VAC


Iout : 100%

| Check item | Output Voltage (V) | | Ripple Voltage (mVp-p) | D.U.T.State |
|-------------|--------------------|--------|------------------------|-------------|
| Before Test | 12.001 | | 60 | _____ |
| After Test | X | 12.003 | 65 | O.K. |
| | Y | 12.003 | 68 | O.K. |
| | Z | 12.004 | 70 | O.K. |

6. NOISE SIMULATE TEST

MODEL : SWS150-5 , 24

(1) Test Circuit And Equipment

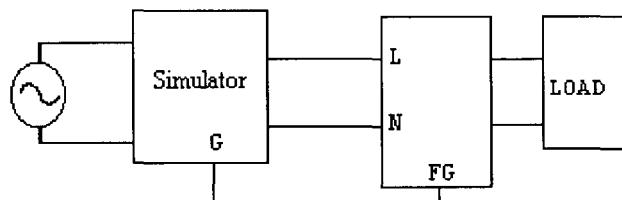

Simulator : INS-400L Noise Laboratory Co.,LTD

(2) Test Conditions

- | | | | | | |
|-----------------------|---|---------------|------------------|---|------------------|
| • Input Voltage | : | 100, 200VAC | • Noise Level | : | 0V~2kV |
| • Output Voltage | : | Rated | • Phase Shift | : | 0° ~ 360° |
| • Output Current | : | 0%, 100% | • Polarity | : | +, - |
| • Ambient Temperature | : | 25°C | • Mode | : | Normal Common |
| • Pulse Width | : | 50ns ~ 1000ns | • Trigger Select | : | Line |

(3) Acceptable Conditions

1. Not to be broken.
2. Not to be shut down output.
3. No other out of orders.

(4) Test Result

OK