

RWS15A SPECIFICATIONS

DENSEI-LAMBDA

PA760-01-01E

Items		Model	RWS15A-5	RWS15A-12	RWS15A-15	RWS15A-24	RWS15A-48
1	Nominal Output Voltage	V	5	12	15	24	48
2	Maximum Output Current	A	3.0	1.3	1.0	0.7	0.3
3	Maximum Output Power	W	15.0	15.6	15.0	16.8	14.4
4	Efficiency (Typ)	(*1) %	71	75	77	78	78
5	Input Voltage Range	(*2) -	85~265VAC (47~440Hz) or 110~330VDC				
6	Input Current (Typ)	(*3) -	0.35A at 100VAC or 0.2A at 200VAC				
7	Inrush Current (Typ)	(*4) -	20A at 100VAC or 40A at 200VAC				
8	Output Voltage Range	-	±10%				
9	Maximum Ripple & Noise	mV	120	150	150	200	300
10	Maximum Line Regulation	(*5) mV	20	48	60	96	192
11	Maximum Load Regulation	(*6) mV	40	100	120	150	250
12	Over Current Protection	(*7) A	3.15~	1.36~	1.05~	0.73~	0.31~
13	Over Voltage Protection	(*8) V	5.75~6.75	13.8~16.2	17.3~20.3	27.6~32.4	55.2~64.8
14	Hold-Up Time (Typ)	(*9) -	20ms				
15	Remote Sensing	-	-				
16	Series Operation	-	Possible				
17	Operating Temperature	(*10) -	0~+50°C (100%) , 60°C (60%)				
18	Operating Humidity	-	30%~90% RH				
19	Storage Temperature	-	-30~+85°C				
20	Storage Humidity	-	10%~95%RH				
21	Cooling	-	Convection Cooled				
22	Temperature Coefficient	-	1% (Typ) at 0°C~+50°C				
23	Withstand Voltage	(*11) -	Input-Chassis : 2kVAC , Input-Output : 3kVAC Output-Chassis : 500VAC 1min				
24	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output-FG 500VDC				
25	Vibration	-	10~55Hz (sweep 1min) Less than 19.6m/s ² X,Y,Z 1h each				
26	Shock	-	Less than 196.1m/s ²				
27	Safety	-	<i>Approved by UL1950, CSA 950, EN60950 Built to meet DENTORI</i>				
28	Conducted Radio Noise	-	Built to meet FCC class B				
29	Weight	-	270g				
30	Size (W*H*D)	-	35mm x 97mm x 98.5mm (Refer to Outline Drawing)				

Notes:

- *1 : At 100VAC and Maximum Output Power, Ta = 25°C.
- *2 : For cases where conformance to various safety specs (UL, CSA, VDE) are required, to be described as 100~240VAC 50/60Hz on name plate.
- *3 : At 100VAC or 200VAC & Maximum Output Power.
- *4 : Typical value on cold start, Ta = 25°C.
- *5 : From 85~265VAC or 110~330VDC, constant load.
- *6 : From No-Load to Full Load, Constant Input Voltage.
- *7 : Foldback current limiting with automatic recovery.
Avoid to operate overload or dead short for 30 seconds.
- *8 : Inverter shut-down method, manual reset.
- *9 : At 100VAC, Nominal Output Voltage & Maximum Output Current, Ta = 25°C.
- *10 : At Vertical Mounting.
- *11 : Refer to instruction manual for testing procedure.

RWS 15A OUTPUT DERATING

NEMIC-LAMBDA


OPEN FLAME (NO COVER)

Ta(°C)	LOAD(%)			
	MOUNTING : A	MOUNTING : B	MOUNTING : C	MOUNTING : D
0 ~ +30	100	100	100	100
40	100	100	100	100
45	100	100	100	100
50	100	100	100	100
60	60	60	60	60

WITH COVER (OPTION)

Ta(°C)	LOAD(%)			
	MOUNTING : A	MOUNTING : B	MOUNTING : C	MOUNTING : D
0 ~ +30	100	100	100	100
40	100	100	100	100
45	100	100	100	100
50	80	80	80	80
60	50	50	50	50

OUTPUT DERATING CURVE

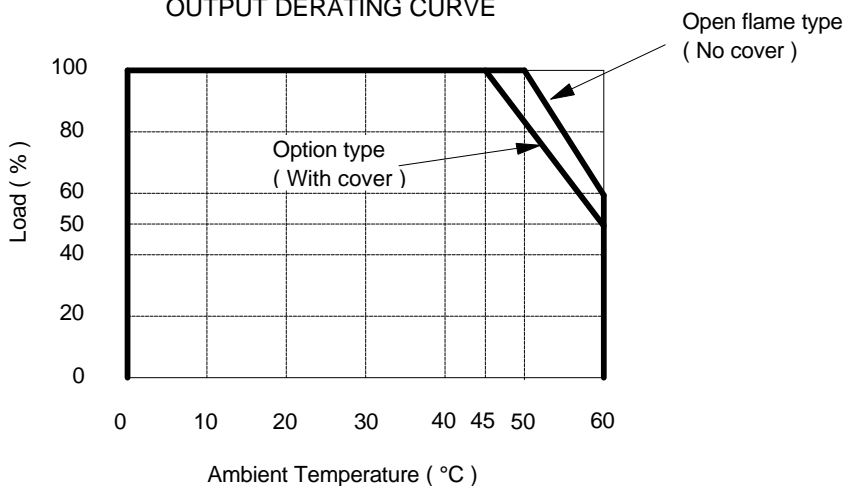

MOUNTING : A

MOUNTING : B

MOUNTING : C

MOUNTING : D

DON'T USE

(STANDARD MOUNTING)

