

# C3216C0G2A104J160AC

TDK Item Description : C3216C0G2A104J\*\*\*\*



## Application & Main Feature

Commercial Grade ( Mid Voltage (100 to 630V) )

## Series

C3216 [EIA 1206]



## Dimensions

L	3.20mm ±0.20mm
W	1.60mm ±0.20mm
T	1.60mm ±0.20mm
B	0.20mm Min.
G	1.00mm Min.

## Temperature Characteristic

C0G (-55 to 125 degC 0+/-30ppm/degC)

## Rated Voltage

2A(100Vdc)

## Capacitance

100nF

## Capacitance Tolerance

J (±5%)

## Q Factor

1000 Min.


## Insulation Resistance

5Gohm Min


## AEC-Q200

Not Applicable


## |Z|, ESR vs. Freq. Characteristics

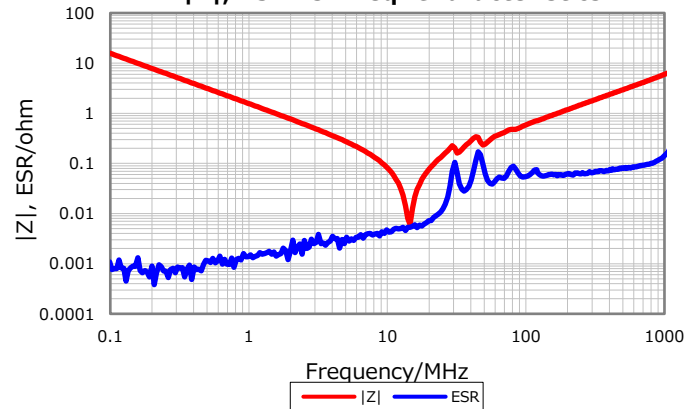

## Cap. vs. Freq. Characteristic

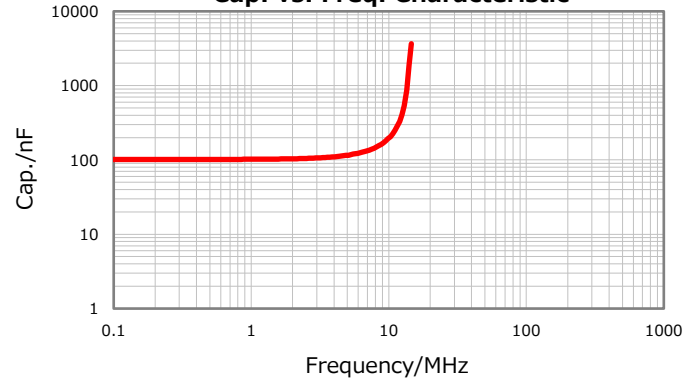


## DC Bias Characteristic

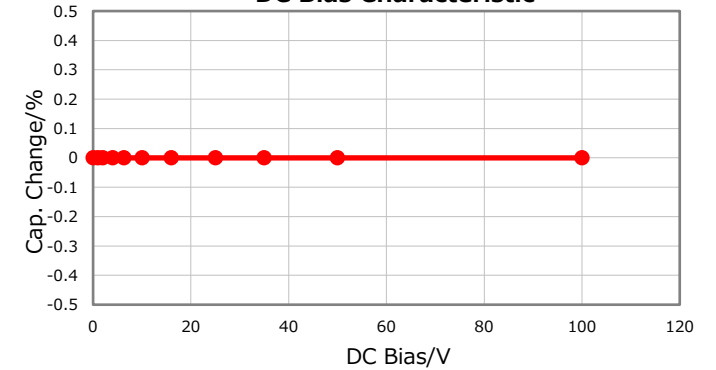

## Temperature Characteristics



## Ripple Temperature Rise Characteristics

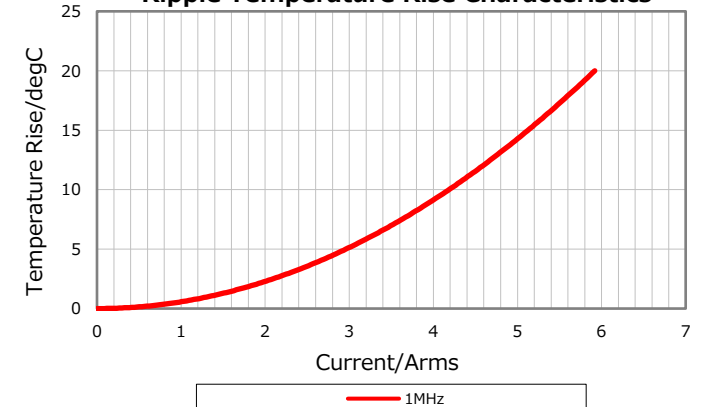

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

May 22, 2019