

# C3216X5R0G107M160AB

TDK Item Description : C3216X5R0G107MT\*\*\*\*



## Application & Main Feature

Commercial Grade ( General (Up to 50V) )

## Series

C3216 [EIA CC1206]



## Dimensions

L 3.20mm +0.3,-0.1mm  
 W 1.60mm +0.3,-0.1mm  
 T 1.60mm +0.3,-0.1mm  
 B 0.20mm Min.  
 G 1.00mm Min.

## Temperature Characteristic

X5R (-55 to 85 degC +/-15%)

## Rated Voltage

0G (4Vdc)

## Capacitance

100uF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

10% Max.


## Insulation Resistance

1Mohm Min.


## AEC-Q200

Not Applicable


## |Z|, ESR vs. Freq. Characteristics

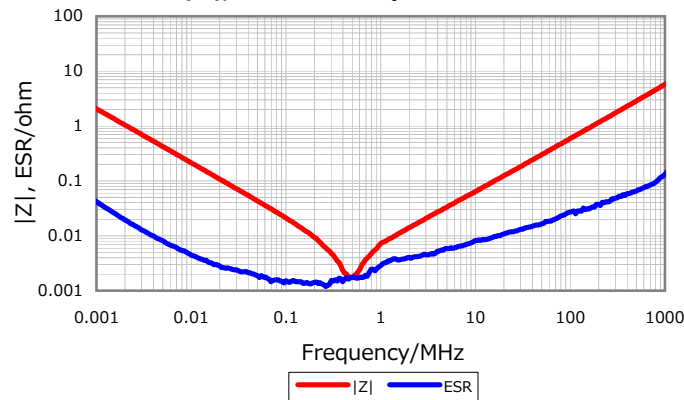


## Cap. vs. Freq. Characteristic

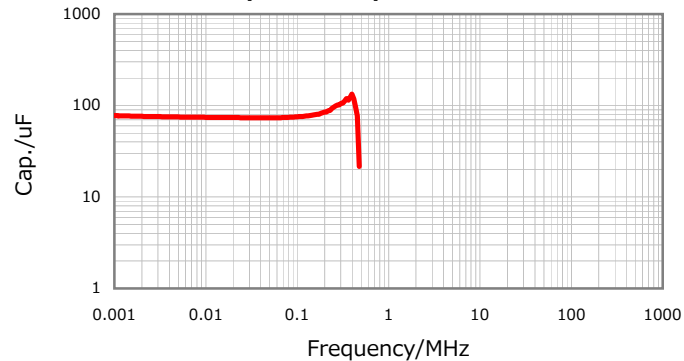


## DC Bias Characteristic

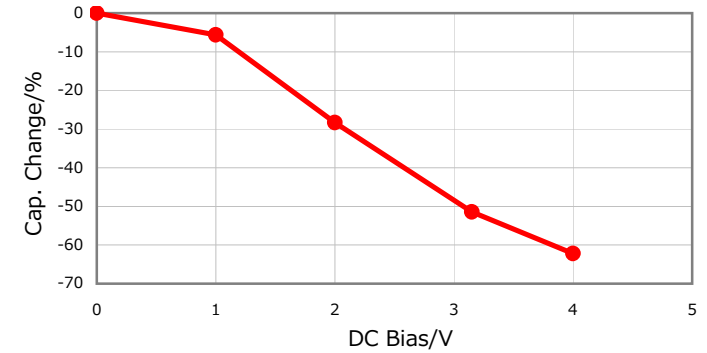

## Temperature Characteristics

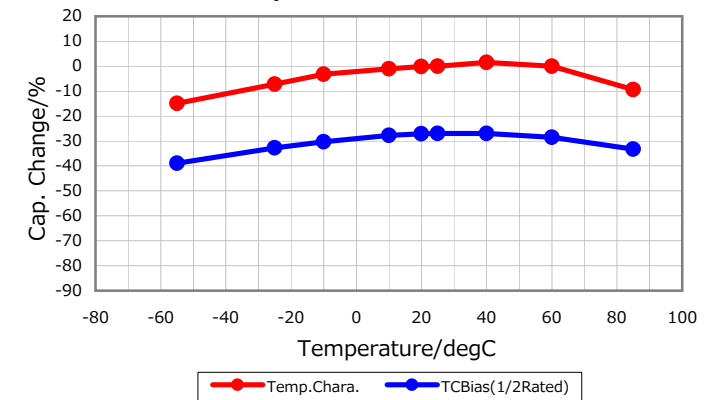

## Ripple Temperature Rise Characteristics

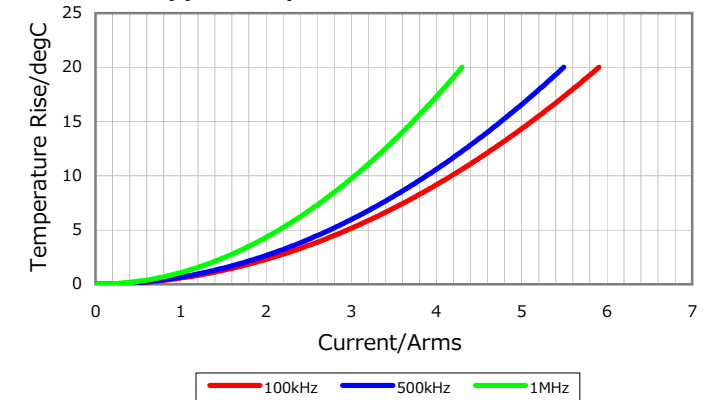

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 3, 2016